

AFK/SH2-NK/SH2-YK

STON	FLICKER RELAY	閃爍繼電器
-------------	----------------------	--------------



- CE Approved .
- STON or P&B RELAY inside.
- Using MOTOROLA CMOS IC.
- Can order operation voltage AC or DC .
- CE 認證。
- 內部採用美國第一品牌 P&B 繼電器。
- 使用 MOTOROLA 計時 IC。
- 可選擇操作電壓為交流或直流、經濟實用。
- 超大輸出容量 250V 10A。

ORDERING INFORMATION 訂購說明

Ex. **F** **K** **3S** **A220**

Timer type 型式	Timer range 時間範圍				Operating voltage 電壓範圍
F : AFK N : SH2-NK Y : SH2-YK	1S	3S	6S	F:10S	D12: DC12V
				N,Y:12S	D24: DC24V
	30S	60S	3M	6M	D48: DC48V
	F:10M	30M	60M	3H	A12: AC12V
	N,Y:12M				A24: AC24V
					A110: AC110V
					A220: AC220V
					A240: AC240V
					A380: AC380V
					A440: AC440V


SPECIFICATIONS & CHARACTERISTICS 規格 & 特性

Type 型式	AFK/SH2-NK/SH2-YK	
Rate operation voltage 額定電壓	DC:12V/ 24V/ 48V AC:12V/ 24V/ 110V-220V/ 240V/ 380V/ 440V	
Operating voltage range 電壓使用範圍	DC: 85%~110% AC: 80%~110%	
Rated frequency 額定頻率	AC: 50~60Hz	
Rated power consumption 額定功率消耗	About: 2VA	
Rated control capacity 輸出容量	DC: 5A 28VDC AC: 10A 250VAC P.F.=1	
Setting accuracy 設定誤差	± 10%	
Reset time 復歸時間	Less than 0.1s	
Life 壽命	Mechanical 機械	5000000
	Electrical 電氣	100000
Output arrangement 輸出方式	Timed-out 1 form C	
Max. temperature rise 最大溫升	55 deg.	
Ambient temperature 周圍溫度	-10℃ to +65℃ 但不結冰結露 But no ice	
Ambient humidity 周圍溼度	Max. 85% RH	
Weight 重量	About 170g / N type : About 230g / Y type : About 240g	


AFK/SH2-NK/SH2-YK

DIMENSIONS 规格尺寸


AFK

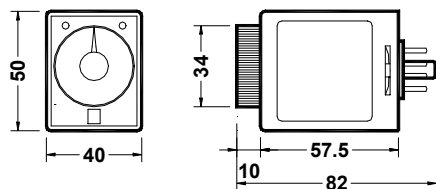


AFK + PF085A + FH-3 ×2




AFK + US-08




AFK + P3G-08




SH2-NK

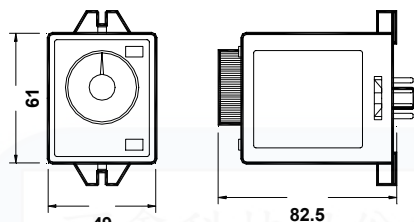

SH2-NK + 8PFA




SH2-YK

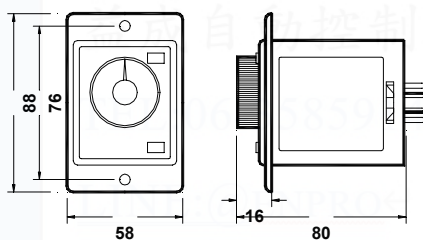

INSERT HOLE

SH2-YK+ US-08



SH2-YK+ P3G-08

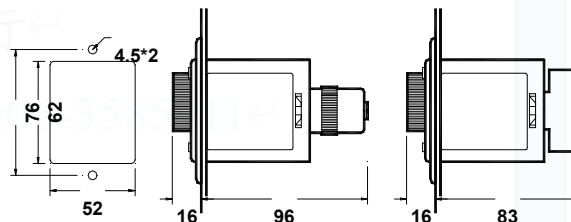

UNIT :mm

OPERATION 操作方式

AFK/SH2-NK/SH2-YK

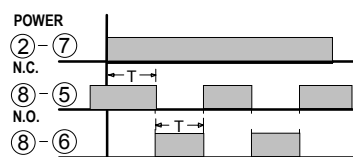

COM. : Common terminal
N.C. : Normally closed contact
N.O. : Normally open contact
●◀● : Flicker out contact
○◀○ : Instantaneous contact

- NOTE:
- Set time should be greater than min. operation time.
 - Once power is cut off or timing operation is completed, Power off time is needed to start the operation again.
 - Do not change the set time during operation.
 - When changing set time, cut off power and set the time.