

H3CT-A/H3CT-B/H3CT-C

STON

DIN SIZE 48×48mm
MULTI-FUNCTION
MULTI-RANGE TIMER

歐洲規格尺寸
48×48mm
限時繼電器



- CE Approved .
- STON or P&B RELAY inside.
- MOTOROLA IC inside.
- You can order multi-voltage AC/DC24~240V .
- 德國 CE 認證。
- 內部採用美國第一品牌 P&B 繼電器。
- 使用美國 MOTOROLA IC 。
- 四段切換時間，一瞬時一限時或兩限時可切換。
- 具有全電壓 AC/DC 24~240V 規格。

ORDERING INFORMATION 訂購說明

Ex H3CT B AD2420

Timer Type 型式	Time range 時間範圍				Operating voltage 電壓範圍
A : H3CT-A B : H3CT-B C : H3CT-C	A	1S/10S/ 1M/10M	C	1M/10M/ 1H/10H	D12 : DC12V D24 : DC24V A110 : AC110V A220 : AC220V A240 : AC240V A380 : AC380V A415 : AC415V A440 : AC440V AD2420 : AC/DC24~240V
	B	3S/30S/ 3M/30M			



SPECIFICATIONS & CHARACTERISTICS 規格 & 特性

Type 型式		H3CT-A/H3CT-B/H3CT-C							
Rate operation voltage 額定電壓		DC: 12V	24V	AC: 110V	220V	240V	380V	415V	440V
		AD/DC: AC/DC 24~240V							
Operating voltage range 電壓使用範圍		DC: 85%~110% AC: 80%~110%							
Rated frequency 額定頻率		AC: 50~60Hz							
Rated power consumption 額定功率消耗		About: 2VA							
Rated control capacity 輸出容量		DC: 5A 28VDC AC: 5A 250VAC P.F.=1							
Setting accuracy 設定誤差		± 10%							
Reset time 復歸時間		Less than 0.1S							
Life 壽命	Mechanical 機械	5000000							
	Electrical 電氣	100000							
Output arrangement 輸出方式		Time out 2 form C / Time out 1 form C & Instantaneous 1 form C							
Max. temperature rise 最大溫升		55 deg.							
Ambient temperature 周圍溫度		-10℃ to +65℃ 但不結冰結露 But no ice							
Ambient humidity 周圍溼度		Max. 85% RH							
Weight 重量		About 135g							


H3CT-A/H3CT-B/H3CT-C

◦ DIMENSIONS 规格尺寸



H3CT-□ + Y-48 Adapter

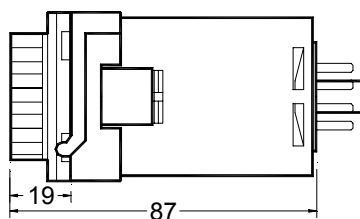

INSERT HOLE



H3CT-□



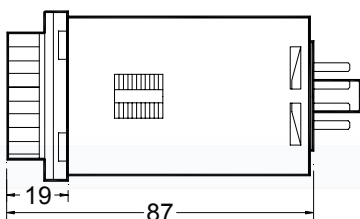



◦ OPERATION 操作方式

H3CT-□

MODE A

MODE B

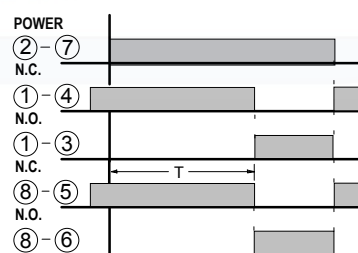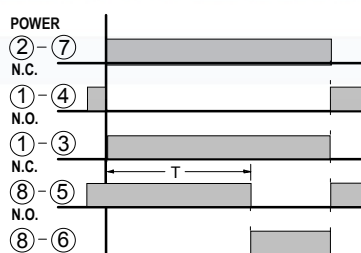

COM. : Common terminal
N.C. : Normally closed contact
N.O. : Normally open contact

●▲● : Timed out contact
○ ○ : Instantaneous contact

- NOTE:
- Set time should be greater than min. operation time.
 - Once power is cut off or timing operation is completed, power off time is needed to start the operation again.
 - Do not change the set time during operation.
 - When changing set time, cut off power and set the time.