

**AD1500S Series
500Watts, Single Output**



Dimensions:121(D)x110(H)x100(W)mm

Features:

- High power density
- Built-in temperature control fan
- RoHS compliance
- 3 - year warranty
- Great reliability
- DIN rail / Wall bracket mounting solution
- Over voltage protection
- Overload protection
- Short circuit protection

General Specifications

INPUT

Input voltage..... 115/230AC ±15% selectable
 Input frequency47-63Hz
 Inrush current22A/115VAC
 (Cold start) 44A/230VAC



OUTPUT

Hold-up time (Full load@230VAC).....20mS Min.
 Temp. Coefficient±0.04% / °C
 Over voltage protectionAutorecovery
 Overload protection Power limited
 Short circuit protection..... Autorecovery
 Transient response. . (Load change 50% to 100%)
 Voltage deviation5%
 Recovery time2mS

EMC STANDARDS

EN 55011	Class B
EN 55022	Class B
EN 61000-4-2	Level 3
EN 61000-4-3	Level 3
EN 61000-4-4	Level 3
EN 61000-4-5	Level 3
EN 61000-4-6	Level 3
EN 61000-4-8	Level 3
EN 61000-4-11	Level 3

SAFETY STANDARDS

	EN 60950 (Marking)
	UL 508 (Meet) CSA 22.2 (Meet)

ENVIRONMENTAL

Operating temperature: -20°C ~ 50°C ambient, derating each output at 2.5% per degree from 50°C to 70°C
Operating humidity: Non-condensing, 5% ~ 95%RH.
Vibration: Random vibration, 10Hz ~100Hz, 3axis.
MTBF: 60,000hrs Min. Per MIL-HDBK-217F, 25°C GB.

Web site : <http://acro-powers.com.tw>
 E-mail : service@acro-powers.com.tw
 TEL : 886-2-22675015, FAX : 886-2-22674939



AD1500S Series

500Watts, Single Output




Output Specifications

Model	O/P voltage Adjustment	Loading (A)			Ripple Noise	Line Reg.	Load Reg.	Efficiency	Overvoltage Protection
		Min.	Rated	Max.					
AD1500-12S	+12VDC±10%	0A	42A	42A	100mVp-p	± 1%	± 2%	84%	15~17VDC
AD1500-24S	+24VDC±10%	0A	21A	21A	150mVp-p	± 1%	± 2%	84%	27~30VDC
AD1500-48S	+48VDC±10%	0A	10.5A	10.5A	250mVp-p	± 1%	± 2%	85%	52~56VDC

- NOTE:**
1. Each output can supply up to maximum current, but total loading can not exceed rated output wattage.
 2. Line regulation is measured from low line to high line at rated load.
 3. Load regulation is measured from 20% to 100% of rated load at 230VAC input.
 4. Ripple & Noise is measured by using a 0.1uF/630V metalized capacitor & a 47uF electrolytic capacitor parallel on the test point, at rated load and 230VAC input.
 5. Efficiency is measured at rated load and 230VAC input.

Mechanical Details

No. AD500S
Dimensions: 121x110x100mm

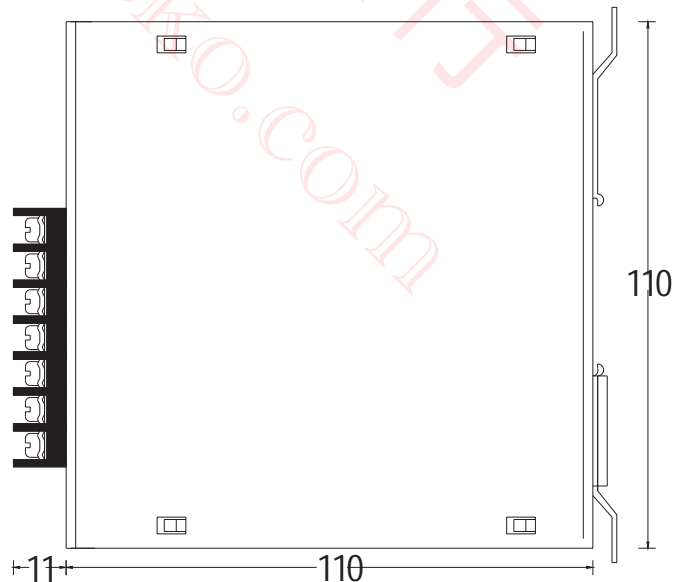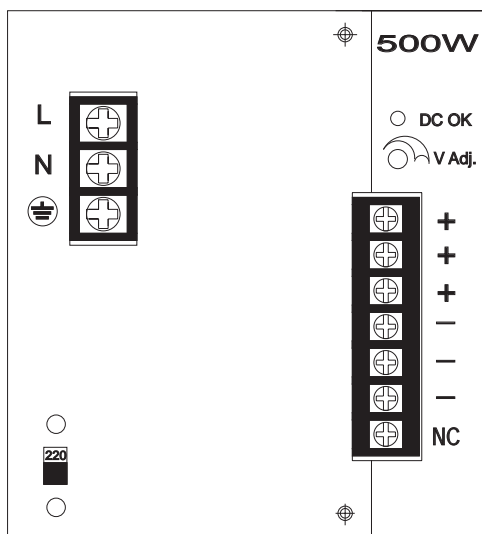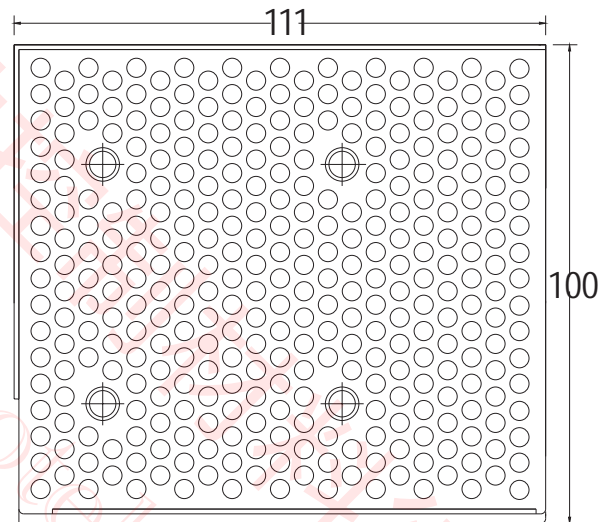

Web site : <http://acro-powers.com.tw>
 E-mail : service@acro-powers.com.tw
 TEL : 886-2-22675015, FAX : 886-2-22674939

