

TRF-V/TRF-V2/TRF-VH/TRF-V2H

STON	OFF DELAY RELAY	斷電延遲繼電器
-------------	------------------------	----------------



- CE Approved.
- TEXAS INSTRUMENTS IC inside.
- The largest time is 60 minutes .
- Normal type is 1A has with high contact 5A could be choose .
- CE 認證。
- 內部使用美國 TEXAS INSTRUMENTS IC 。
- 最大之斷電延遲時間為 **60M**
- 具有兩組接點之 TRF-V2 。
- 具有 **5A** 高容量接點可供選擇。

ORDERING INFORMATION 訂購說明

Ex. TRF **V** **60S** **A220**

OFF Timer Type 型式	Time range 時間範圍				Operating voltage 電壓範圍
V : TRF-V V2 : TRF-V2 VH : TRF-VH V2H : TRF-V2H	1S	0.1S TO 1S	3M	10S TO 3M	D12: DC12V
	6S	0.6S TO 6S	6M	10S TO 6M	D24: DC24V
	10S	1S TO 10S	10M	20S TO 10M	D48: DC48V
	30S	3S TO 30S	30M	30S TO 30M	A12: AC12V
	60S	6S TO 60S	60M	60S TO 60M	A24: AC24V
					A110: AC110V
					A220: AC220V
					A240: AC240V
					A380: AC380V
					A440: AC440V

SPECIFICATIONS & CHARACTERISTICS 規格 & 特性

Type 型式	TRF-V	TRF-VH	TRF-V2	TRF-V2H
Rate operation voltage 額定電壓	DC:12V/ 24V/ 48V AC:12V/ 24V/ 110V/ 220V/ 240V/ 380V/ 440V			
Operating voltage range 電壓使用範圍	DC: 85%~110% AC: 80%~110%			
Rated frequency 額定頻率	AC: 50~60Hz			
Rated power consumption 額定功率消耗	About: 2VA			
Rated control capacity 輸出容量	1A/ 250VAC	5A/ 250VAC	1A/ 250VAC	5A/ 250VAC
Setting accuracy 設定誤差	± 10%			
Reset time 復歸時間	Less than 0.1S			
Life 壽命	Mechanical 機械	5000000		
	Electrical 電氣	100000		
Output arrangement 輸出方式	Time out 1 form C		Time out 2 form C	
Max. temperature rise 最大溫升	55 deg.			
Ambient temperature 周圍溫度	-10℃ to +65℃ 但不結冰結露 But no ice			
Ambient humidity 周圍溼度	Max. 85% RH			
Weight 重量	About 170g			


TRF-V/TRF-V2/TRF-VH/TRF-V2H

◦ DIMENSIONS 规格尺寸

TRF-V(H)/TRF-V2(H)

TRF-V(H)/TRF-V2(H) + PF085A + FH-3×2





UNIT :mm

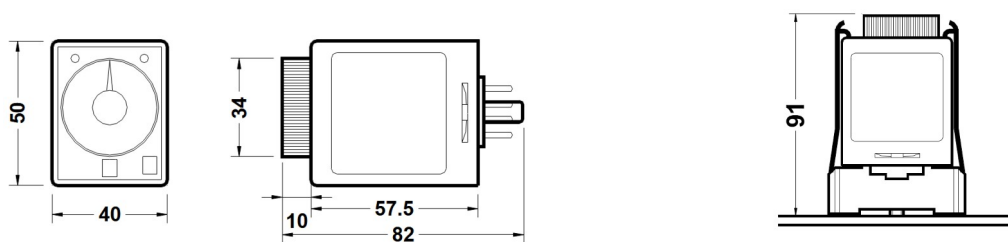

◦ OPERATION 操作方式

TRF-V(H)

TRF-V2(H)

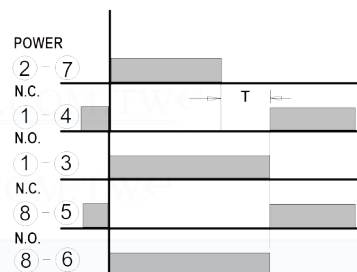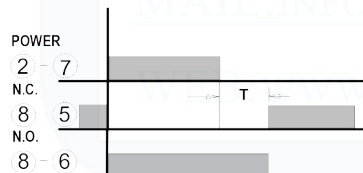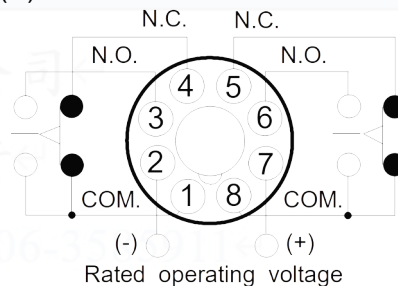

COM. : Common terminal
N.C. : Normally closed contact
N.O. : Normally open contact

○▽○ : Off time out contact
○ : Instantaneous contact

- NOTE:
- Set time should be greater than min. operation time.
 - Once power is cut off or timing operation is completed, Power off time is needed to start the operation again.
 - Do not change the set time during operation.
 - When changing set time, cut off power and set the time.