
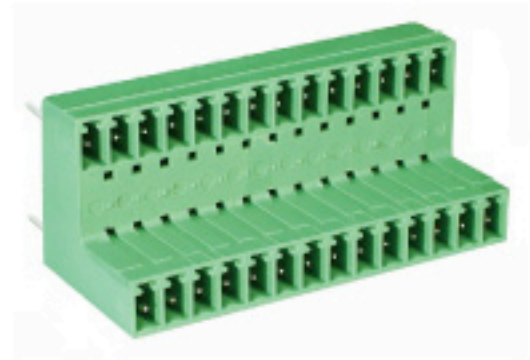


Pitch: 3.81mm(0.150inch)

- **Description :**
- Pitch : 3.81mm (0.150inch)




## SPECIFICATIONS




			CUL	VDE
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V	AC 300V
負載電流	Rated Current	Bemessungsstrom	10A	8A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
焊針	Solder Pin	Lötstift	□0.8mm, Brass, Tin plated	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.3mm	
UL File No.	E167040			

TABLE

Item No.	A(mm)	A(inch)
ME540-38104	8.4	0.331
ME540-38106	12.2	0.481
ME540-38108	16.0	0.631
ME540-38110	19.8	0.781
ME540-38112	23.6	0.931
ME540-38114	27.5	1.081
ME540-38116	31.3	1.231
ME540-38118	35.1	1.381
ME540-38120	38.9	1.531
ME540-38122	42.7	1.681
ME540-38124	46.5	1.831
ME540-38126	50.3	1.981
ME540-38128	54.1	2.131
ME540-38130	57.9	2.281
ME540-38132	61.7	2.431
ME540-38134	65.6	2.581
ME540-38136	69.4	2.731
ME540-38138	73.2	2.881
ME540-38140	77.0	3.031



PCB Layout



Pitch: 3.81mm(0.150inch)

- Description :
- Pitch : 3.81mm (0.150inch)




## SPECIFICATIONS

			CUL	VDE
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V	AC 300V
負載電流	Rated Current	Bemessungsstrom	10A	8A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
焊針	Solder Pin	Lötstift	□0.8mm, Brass, Tin plated	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ 1.3mm	



TABLE

Item No.	A(mm)	A(inch)
ME550-38104	18.2	0.717
ME550-38106	22.0	0.867
ME550-38108	25.8	1.017
ME550-38110	29.6	1.167
ME550-38112	33.5	1.317
ME550-38114	37.3	1.467
ME550-38116	41.1	1.617
ME550-38118	44.9	1.767
ME550-38120	48.7	1.917
ME550-38122	52.5	2.067
ME550-38124	56.3	2.217
ME550-38126	60.1	2.367
ME550-38128	63.9	2.517
ME550-38130	67.7	2.667
ME550-38132	71.6	2.817
ME550-38134	75.4	2.967
ME550-38136	79.2	3.117
ME550-38138	83.0	3.267
ME550-38140	86.8	3.417

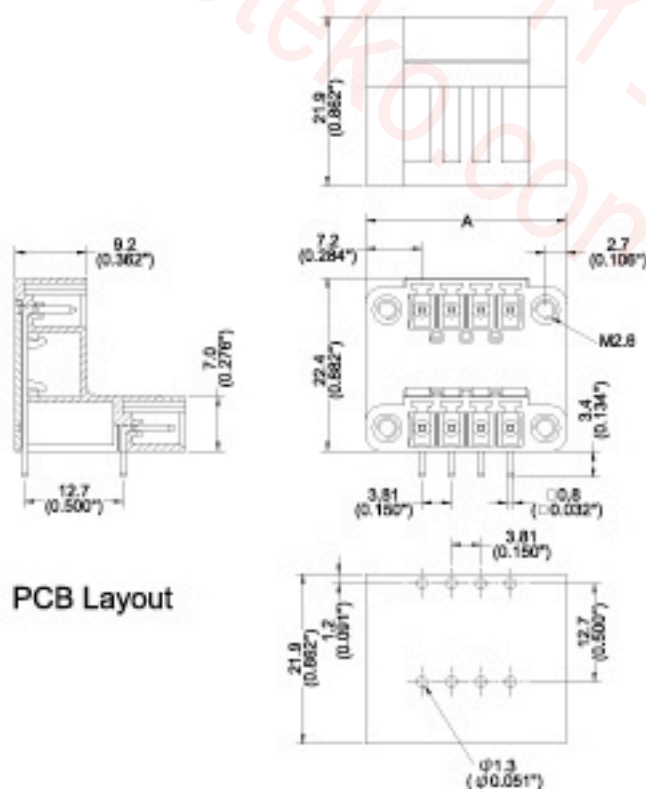

Pitch: 3.81mm(0.150inch)

- Description :
- Pitch : 3.81mm (0.150inch)

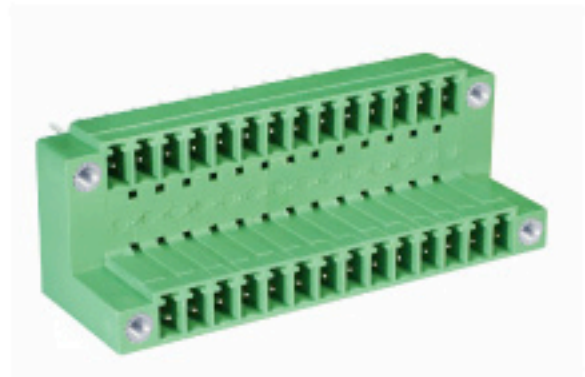


## SPECIFICATIONS

			CUL	VDE
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V	AC 300V
負載電流	Rated Current	Bemessungsstrom	10A	8A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
焊針	Solder Pin	Lötstift	□0.8mm, Brass, Tin plated	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.3mm	
UL File No.	E167040			

TABLE


Item No.	A(mm)	A(inch)
ME560-38104	18.2	0.717
ME560-38106	22.0	0.867
ME560-38108	25.8	1.017
ME560-38110	29.6	1.167
ME560-38112	33.5	1.317
ME560-38114	37.3	1.467
ME560-38116	41.1	1.617
ME560-38118	44.9	1.767
ME560-38120	48.7	1.917
ME560-38122	52.5	2.067
ME560-38124	56.3	2.217
ME560-38126	60.1	2.367
ME560-38128	63.9	2.517
ME560-38130	67.7	2.667
ME560-38132	71.6	2.817
ME560-38134	75.4	2.967
ME560-38136	79.2	3.117
ME560-38138	83.0	3.267
ME560-38140	86.8	3.417

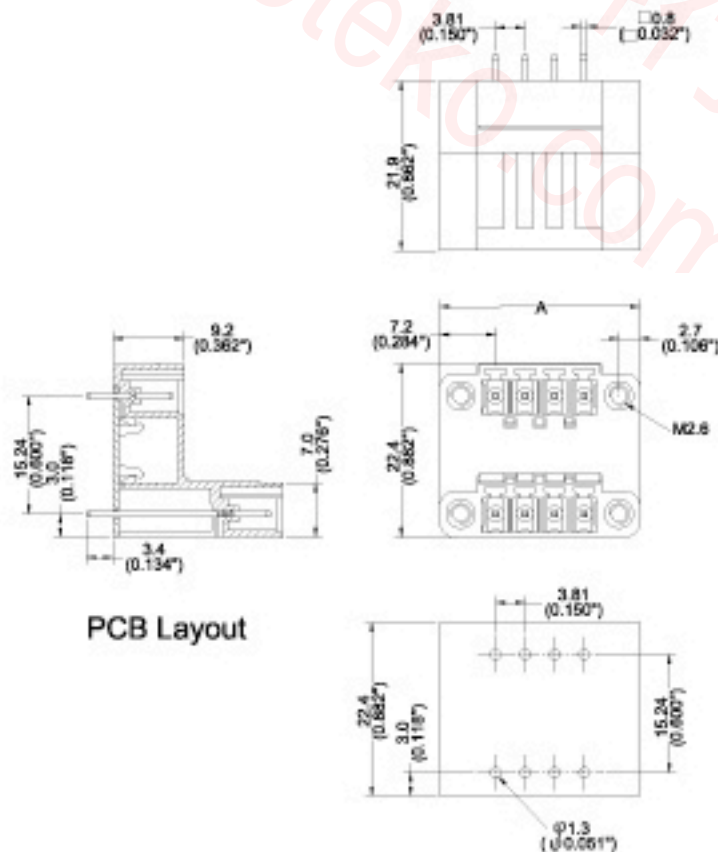

PCB Layout

Pitch: 3.50mm(0.138inch)

- **Description :**
- Pitch : 3.50mm (0.138inch)






## SPECIFICATIONS


負載電壓	Rated Voltage	Bemessungsspannung	AC 160V
負載電流	Rated Current	Bemessungsstrom	8A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.5mm

TABLE

Item No.	A(mm)	A(inch)
ME630-35002	8.30	0.327
ME630-35003	11.8	0.465
ME630-35004	15.3	0.602
ME630-35005	18.8	0.740
ME630-35006	22.3	0.878
ME630-35007	25.8	1.016
ME630-35008	29.3	1.154
ME630-35009	32.8	1.291
ME630-35010	36.3	1.429
ME630-35011	39.8	1.567
ME630-35012	43.3	1.705
ME630-35013	46.8	1.843
ME630-35014	50.3	1.980
ME630-35015	53.8	2.118
ME630-35016	57.3	2.256
ME630-35017	60.8	2.394
ME630-35018	64.3	2.531
ME630-35019	67.8	2.669
ME630-35020	71.3	2.807
ME630-35021	74.8	2.945
ME630-35022	78.3	3.083
ME630-35023	81.8	3.220
ME630-35024	85.3	3.358
ME630-35025	88.8	3.596




PCB Layout



Pitch: 3.81mm(0.150inch)

- Description :
- Pitch : 3.81mm (0.150inch)






## SPECIFICATIONS


負載電壓	Rated Voltage	Bemessungsspannung	AC 160V
負載電流	Rated Current	Bemessungsstrom	8A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□ 1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to +105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.5mm

TABLE

Item No.	A(mm)	A(inch)
ME630-38102	8.6	0.339
ME630-38103	12.4	0.489
ME630-38104	16.2	0.639
ME630-38105	20.1	0.789
ME630-38106	23.9	0.939
ME630-38107	27.7	1.089
ME630-38108	31.5	1.239
ME630-38109	35.3	1.389
ME630-38110	39.1	1.539
ME630-38111	42.9	1.689
ME630-38112	46.7	1.839
ME630-38113	50.5	1.989
ME630-38114	54.3	2.139
ME630-38115	58.2	2.289
ME630-38116	61.9	2.439
ME630-38117	65.8	2.589
ME630-38118	69.6	2.739
ME630-38119	73.4	2.889
ME630-38120	77.2	3.039
ME630-38121	81.0	3.189
ME630-38122	84.8	3.339
ME630-38123	88.6	3.489
ME630-38124	92.4	3.639
ME630-38125	95.9	3.789




PCB Layout



Pitch: 5.00mm(0.197inch)

- **Description :**
- Pitch : 5.00mm (0.197inch)




## SPECIFICATIONS




負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.5mm

### TABLE

Item No.	A(mm)	A(inch)
ME630-50002	11.3	0.446
ME630-50003	16.3	0.643
ME630-50004	21.3	0.839
ME630-50005	26.3	1.036
ME630-50006	31.3	1.233
ME630-50007	36.3	1.430
ME630-50008	41.3	1.627
ME630-50009	46.3	1.824
ME630-50010	51.3	2.020
ME630-50011	56.3	2.217
ME630-50012	61.3	2.414
ME630-50013	66.3	2.611
ME630-50014	71.3	2.808
ME630-50015	76.3	3.005
ME630-50016	81.3	3.202
ME630-50017	86.3	3.398
ME630-50018	91.3	3.595
ME630-50019	96.3	3.792
ME630-50020	101.3	3.989
ME630-50021	106.3	4.186
ME630-50022	111.3	4.383
ME630-50023	116.3	4.580
ME630-50024	121.3	4.776




### PCB Layout



Pitch: 5.08mm(0.200inch)

- **Description :**
- Pitch : 5.08mm (0.200inch)

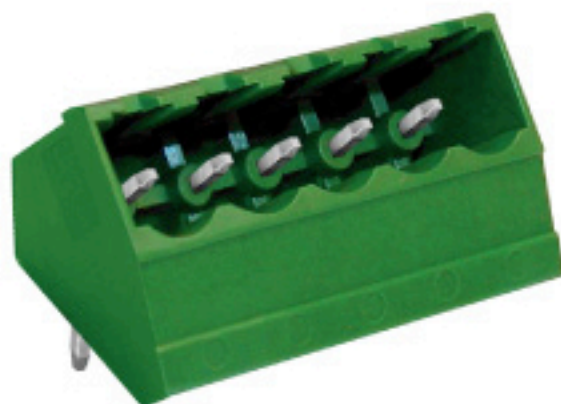



## SPECIFICATIONS




			CUL
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to +105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.5mm
UL File No.	E167040		

### TABLE

Item No.	A(mm)	A(inch)
ME630-50802	11.5	0.452
ME630-50803	16.6	0.652
ME630-50804	21.6	0.852
ME630-50805	26.7	1.052
ME630-50806	31.8	1.252
ME630-50807	36.9	1.452
ME630-50808	42.0	1.652
ME630-50809	47.0	1.852
ME630-50810	52.1	2.052
ME630-50811	57.2	2.252
ME630-50812	62.3	2.452
ME630-50813	67.4	2.652
ME630-50814	72.4	2.852
ME630-50815	77.5	3.052
ME630-50816	82.6	3.252
ME630-50817	87.7	3.452
ME630-50818	92.8	3.652
ME630-50819	97.8	3.852
ME630-50820	102.9	4.052
ME630-50821	108.0	4.252
ME630-50822	113.1	4.452
ME630-50823	118.2	4.652
ME630-50824	123.2	4.852
ME630-50825	128.3	5.052




### PCB Layout



Pitch: 5.00mm(0.197inch)

- Description :
- Pitch : 5.00mm (0.197inch)






## SPECIFICATIONS


			CUL
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.7mm

TABLE

Item No.	A(mm)	A(inch)
ME710-50002	10.00	0.394
ME710-50003	15.00	0.591
ME710-50004	20.00	0.787
ME710-50005	25.00	0.984
ME710-50006	30.00	1.181
ME710-50007	35.00	1.378
ME710-50008	40.00	1.575
ME710-50009	45.00	1.772
ME710-50010	50.00	1.969
ME710-50011	55.00	2.165
ME710-50012	60.00	2.362
ME710-50013	65.00	2.559
ME710-50014	70.00	2.756
ME710-50015	75.00	2.953
ME710-50016	80.00	3.150
ME710-50017	85.00	3.346
ME710-50018	90.00	3.543
ME710-50019	95.00	3.740
ME710-50020	100.00	3.937
ME710-50021	105.00	4.134
ME710-50022	110.00	4.331
ME710-50023	115.00	4.528
ME710-50024	120.00	4.724

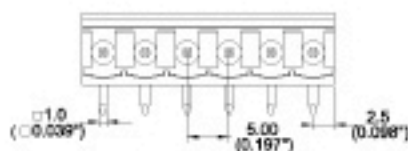


PCB Layout





Pitch: 5.08mm(0.200inch)

- **Description :**
- Pitch : 5.08mm (0.200inch)






## SPECIFICATIONS


負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.7mm

TABLE

Item No.	A(mm)	A(inch)
ME710-50802	10.16	0.400
ME710-50803	15.24	0.600
ME710-50804	20.32	0.800
ME710-50805	25.40	1.000
ME710-50806	30.48	1.200
ME710-50807	35.56	1.400
ME710-50808	40.64	1.600
ME710-50809	45.72	1.800
ME710-50810	50.80	2.000
ME710-50811	55.88	2.200
ME710-50812	60.96	2.400
ME710-50813	66.04	2.600
ME710-50814	71.12	2.800
ME710-50815	76.20	3.000
ME710-50816	81.28	3.200
ME710-50817	86.36	3.400
ME710-50818	91.44	3.600
ME710-50819	96.52	3.800
ME710-50820	101.60	4.000
ME710-50821	106.68	4.200
ME710-50822	111.76	4.400
ME710-50823	116.84	4.600
ME710-50824	121.92	4.800

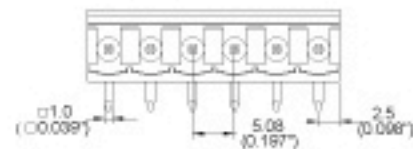


PCB Layout



Pitch: 7.50mm(0.295inch)

- **Description :**
- Pitch : 7.50mm (0.295inch)






## SPECIFICATIONS

負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.5mm


TABLE

Item No.	A(mm)	A(inch)
ME710-75002	12.50	0.492
ME710-75003	20.00	0.787
ME710-75004	27.50	1.083
ME710-75005	35.00	1.378
ME710-75006	42.50	1.637
ME710-75007	50.00	1.969
ME710-75008	57.50	2.264
ME710-75009	65.00	2.559
ME710-75010	72.50	2.854
ME710-75011	80.00	3.150
ME710-75012	87.50	3.445
ME710-75013	95.00	3.740
ME710-75014	102.50	4.035
ME710-75015	110.00	4.331
ME710-75016	117.50	4.626
ME710-75017	125.00	4.921
ME710-75018	132.50	5.217
ME710-75019	140.00	5.512
ME710-75020	147.50	5.807
ME710-75021	155.00	6.102
ME710-75022	162.50	6.398

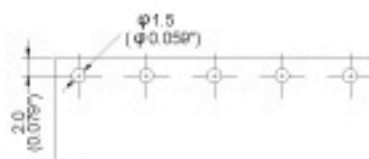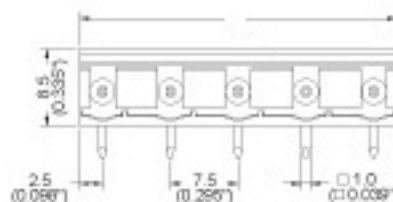

Pitch: 7.62mm(0.300inch)

- **Description :**
- Pitch : 7.62mm (0.300inch)





## SPECIFICATIONS


負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.5mm

TABLE

Item No.	A(mm)	A(inch)
ME710-76202	12.70	0.500
ME710-76203	20.32	0.800
ME710-76204	27.94	1.100
ME710-76205	35.56	1.400
ME710-76206	43.18	1.700
ME710-76207	50.80	2.000
ME710-76208	58.42	2.300
ME710-76209	66.04	2.600
ME710-76210	73.66	2.900
ME710-76211	81.28	3.200
ME710-76212	88.90	3.500
ME710-76213	96.52	3.800
ME710-76214	104.14	4.100
ME710-76215	111.76	4.400
ME710-76216	119.38	4.700
ME710-76217	127.00	5.000
ME710-76218	134.62	5.300
ME710-76219	142.24	5.600
ME710-76220	149.86	5.900
ME710-76221	157.48	6.200
ME710-76222	165.10	6.500

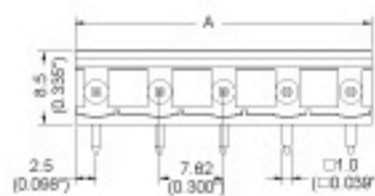


PCB Layout



Pitch: 5.00mm(0.197inch)

- Description :
- Pitch : 5.00mm (0.197inch)




CUL<sup>®</sup> US

## SPECIFICATIONS


			CUL
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□ 1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.7mm

TABLE

Item No.	A(mm)	A(inch)
ME720-50002	10.00	0.394
ME720-50003	15.00	0.591
ME720-50004	20.00	0.787
ME720-50005	25.00	0.984
ME720-50006	30.00	1.181
ME720-50007	35.00	1.378
ME720-50008	40.00	1.575
ME720-50009	45.00	1.772
ME720-50010	50.00	1.969
ME720-50011	55.00	2.165
ME720-50012	60.00	2.362
ME720-50013	65.00	2.559
ME720-50014	70.00	2.756
ME720-50015	75.00	2.953
ME720-35016	80.00	3.150
ME720-50017	85.00	3.346
ME720-50018	90.00	3.543
ME720-50019	95.00	3.740
ME720-50020	100.00	3.937
ME720-50021	105.00	4.134
ME720-50022	110.00	4.331
ME720-50023	115.00	4.528
ME720-50024	120.00	4.724




PCB Layout



Pitch: 5.08mm(0.200inch)

- **Description :**
- Pitch : 5.08mm (0.200inch)







## SPECIFICATIONS

負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□ 1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.7mm

TABLE


Item No.	A(mm)	A(inch)
ME720-50802	10.16	0.400
ME720-50803	15.24	0.600
ME720-50804	20.32	0.800
ME720-50805	25.40	1.000
ME720-50806	30.48	1.200
ME720-50807	35.56	1.400
ME720-50808	40.64	1.600
ME720-50809	45.72	1.800
ME720-50810	50.80	2.000
ME720-50811	55.88	2.200
ME720-50812	60.96	2.400
ME720-50813	66.04	2.600
ME720-50814	71.12	2.800
ME720-50815	76.20	3.000
ME720-35816	81.28	3.200
ME720-50817	86.36	3.400
ME720-50818	91.44	3.600
ME720-50819	96.52	3.800
ME720-50820	101.60	4.000
ME720-50821	106.68	4.200
ME720-50822	111.76	4.400
ME720-50823	116.84	4.600
ME720-50824	121.92	4.800



Pitch: 7.50mm(0.295inch)

## ● Description :

- Pitch : 7.50mm (0.295inch)




## SPECIFICATIONS



負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□ 1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ 17mm

TABLE

Item No.	A(mm)	A(inch)
ME 720-75002	12.50	0.492
ME 720-75003	20.00	0.787
ME 720-75004	27.50	1.083
ME 720-75005	35.00	1.378
ME 720-75006	42.50	1.637
ME 720-75007	50.00	1.969
ME 720-75008	57.50	2.264
ME 720-75009	65.00	2.559
ME 720-75010	72.50	2.854
ME 720-75011	80.00	3.150
ME 720-75012	87.50	3.445
ME 720-75013	95.00	3.740
ME 720-75014	102.50	4.035
ME 720-75015	110.00	4.331
ME 720-75016	117.50	4.626
ME 720-75017	125.00	4.921
ME 720-75018	132.50	5.217
ME 720-75019	140.00	5.512
ME 720-75020	147.50	5.807
ME 720-75021	155.00	6.102
ME 720-75022	162.50	6.398




PCB Layout

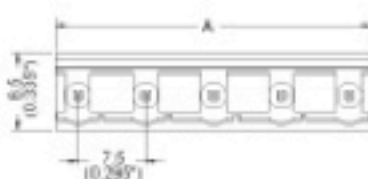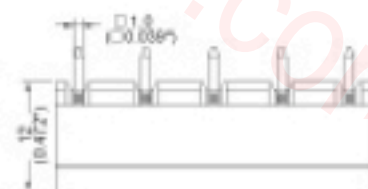

Pitch: 7.62mm(0.300inch)

- Description :
- Pitch : 7.62mm (0.300inch)






## SPECIFICATIONS


負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
C板孔徑	PCB Hole Diameter	Lochdurchmesser	φ 1.7mm

TABLE

Item No.	A(mm)	A(inch)
ME720-76202	12.70	0.500
ME720-76203	20.32	0.800
ME720-76204	27.94	1.100
ME720-76205	35.56	1.400
ME720-76206	43.18	1.700
ME720-76207	50.80	2.000
ME720-76208	58.42	2.300
ME720-76209	66.04	2.600
ME720-76210	73.66	2.900
ME720-76211	81.28	3.200
ME720-76212	88.90	3.500
ME720-76213	96.52	3.800
ME720-76214	104.14	4.100
ME720-76215	111.76	4.400
ME720-76216	119.38	4.700
ME720-76217	127.00	5.000
ME720-76218	134.62	5.300
ME720-76219	142.24	5.600
ME720-76220	149.86	5.900
ME720-76221	157.48	6.200
ME720-76222	165.10	6.500

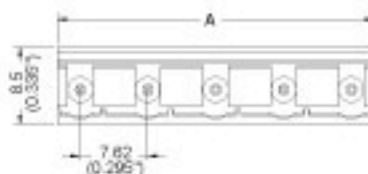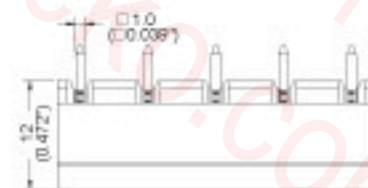


PCB Layout

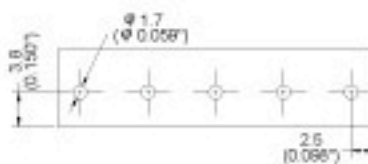

Pitch: 2.50mm(0.150inch)

- **Description :**
- Pitch : 2.50mm (0.150inch)





## SPECIFICATIONS

			CUL
負載電壓	Rated Voltage	Bemessungsspannung	AC 150V
負載電流	Rated Current	Bemessungsstrom	4A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□0.8mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.4 mm

TABLE

Item No.	A(mm)	A(Inch)
ME730-25002	7.54	0.297
ME730-25003	10.08	0.397
ME730-25004	12.62	0.497
ME730-25005	15.16	0.597
ME730-25006	17.70	0.697
ME730-25007	20.24	0.797
ME730-25008	22.78	0.897
ME730-25009	25.32	0.997
ME730-25010	27.86	1.097
ME730-25011	30.40	1.197
ME730-25012	32.94	1.297
ME730-25013	35.48	1.397
ME730-25014	38.02	1.497
ME730-25015	40.56	1.597
ME730-25016	43.10	1.697
ME730-25017	45.64	1.797
ME730-25018	48.18	1.897
ME730-25019	50.72	1.997
ME730-25020	53.26	2.097
ME730-25021	55.80	2.197
ME730-25022	58.34	2.297
ME730-25023	60.88	2.397
ME730-25024	63.42	2.497




PCB Layout





Pitch: 2.50mm(0.150inch)

- **Description :**
- Pitch : 2.50mm (0.150inch)







## SPECIFICATIONS


			CUL
負載電壓	Rated Voltage	Bemessungsspannung	AC 150V
負載電流	Rated Current	Bemessungsstrom	4A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.4 mm

### TABLE

Item No.	A(mm)	A(inch)
ME730-25002	7.54	0.297
ME730-25003	10.08	0.397
ME730-25004	12.62	0.497
ME730-25005	15.16	0.597
ME730-25006	17.70	0.697
ME730-25007	20.24	0.797
ME730-25008	22.78	0.897
ME730-25009	25.32	0.997
ME730-25010	27.86	1.097
ME730-25011	30.40	1.197
ME730-25012	32.94	1.297
ME730-25013	35.48	1.397
ME730-25014	38.02	1.497
ME730-25015	40.56	1.597
ME730-25016	43.10	1.697
ME730-25017	45.64	1.797
ME730-25018	48.18	1.897
ME730-25019	50.72	1.997
ME730-25020	53.26	2.097
ME730-25021	55.80	2.197
ME730-25022	58.34	2.297
ME730-25023	60.88	2.397
ME730-25024	63.42	2.497




### PCB Layout



Pitch: 3.50mm(0.138inch)

- Description :
- Pitch : 3.50mm (0.138inch)






## SPECIFICATIONS


			CUL
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	10A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□ 1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ 1.7mm

### TABLE

Item No.	A(mm)	A(inch)
ME730-35002	9.45	0.372
ME730-35003	12.95	0.510
ME730-35004	16.45	0.648
ME730-35005	19.95	0.785
ME730-35006	23.45	0.923
ME730-35007	26.95	1.061
ME730-35008	30.45	1.200
ME730-35009	33.95	1.337
ME730-35010	37.45	1.474
ME730-35011	40.95	1.612
ME730-35012	44.45	1.750
ME730-35013	47.95	1.888
ME730-35014	51.45	2.026
ME730-35015	54.95	2.163
ME730-35016	58.45	2.301
ME730-35017	61.95	2.439
ME730-35018	65.45	2.577
ME730-35019	68.95	2.715
ME730-35020	72.45	2.852
ME730-35021	75.95	2.990
ME730-35022	79.45	3.128
ME730-35023	82.95	3.266
ME730-35024	86.45	3.404

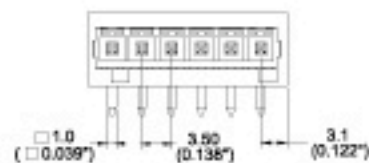


### PCB Layout



Pitch: 3.81mm(0.150inch)

- **Description :**
- Pitch : 3.81mm (0.150inch)






## SPECIFICATIONS

			CUL
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	10A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.7mm

TABLE

Item No.	A(mm)	A(inch)
ME730-38102	9.73	0.383
ME730-38103	13.54	0.533
ME730-38104	17.35	0.683
ME730-38105	21.16	0.833
ME730-38106	24.97	0.983
ME730-38107	28.78	1.133
ME730-38108	32.59	1.283
ME730-38109	36.40	1.433
ME730-38110	40.21	1.583
ME730-38111	44.02	1.733
ME730-38112	47.83	1.883
ME730-38113	51.64	2.033
ME730-38114	55.45	2.183
ME730-38115	59.26	2.333
ME730-38116	63.07	2.483
ME730-38117	66.88	2.633
ME730-38118	70.69	2.783
ME730-38119	74.50	2.933
ME730-38120	78.31	3.083
ME730-38121	82.12	3.233
ME730-38122	85.93	3.383
ME730-38123	89.74	3.533
ME730-38124	93.55	3.683

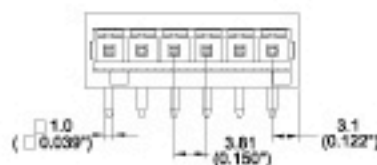


PCB Layout



Pitch: 5.00mm(0.197inch)

- **Description :**
- Pitch : 5.00mm (0.197inch)






## SPECIFICATIONS


			CUL
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.8mm
UL File No.	E167040		

### TABLE

Item No.	A(mm)	A(inch)
ME730-50002	13.40	0.528
ME730-50003	18.40	0.724
ME730-50004	23.40	0.921
ME730-50005	28.40	1.118
ME730-50006	33.40	1.315
ME730-50007	38.40	1.512
ME730-50008	43.40	1.709
ME730-50009	48.40	1.906
ME730-50010	53.40	2.102
ME730-50011	58.40	2.299
ME730-50012	63.40	2.496
ME730-50013	68.40	2.693
ME730-50014	73.40	2.890
ME730-50015	78.40	3.087
ME730-50016	83.40	3.283
ME730-50017	88.40	3.480
ME730-50018	93.40	3.677
ME730-50019	98.40	3.874
ME730-50020	103.40	4.071
ME730-50021	108.40	4.268
ME730-50022	113.40	4.465
ME730-50023	118.40	4.661
ME730-50024	123.40	4.858

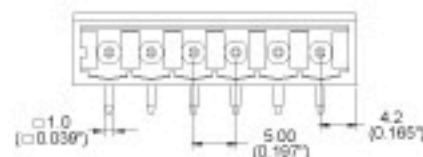


### PCB Layout

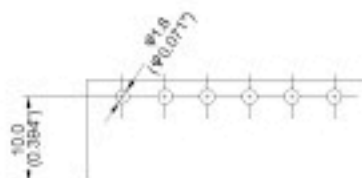

Pitch: 5.08mm(0.200inch)

- **Description :**
- Pitch : 5.08mm (0.200inch)






## SPECIFICATIONS


			CUL
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.8mm
UL File No.	E167040		

### TABLE

Item No.	A(mm)	A(inch)
ME730-50802	13.28	0.523
ME730-50803	18.36	0.723
ME730-50804	23.44	0.923
ME730-50805	28.52	1.123
ME730-50806	33.60	1.323
ME730-50807	38.68	1.523
ME730-50808	43.76	1.723
ME730-50809	48.84	1.923
ME730-50810	53.92	2.123
ME730-50811	59.00	2.323
ME730-50812	64.08	2.523
ME730-50813	69.16	2.723
ME730-50814	74.24	2.923
ME730-50815	79.32	3.123
ME730-50816	84.40	3.323
ME730-50817	89.48	3.523
ME730-50818	94.56	3.723
ME730-50819	99.64	3.923
ME730-50820	104.72	4.123
ME730-50821	109.80	4.323
ME730-50822	114.88	4.523
ME730-50823	119.96	4.723
ME730-50824	125.04	4.923

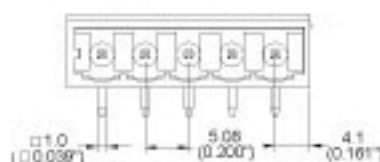


### PCB Layout

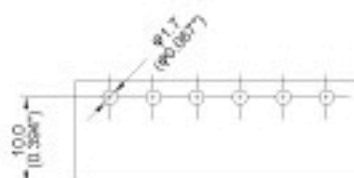

Pitch: 7.50mm(0.295inch)

- Description :
- Pitch : 7.50mm (0.295inch)





## SPECIFICATIONS


			CUL
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.7mm
UL File No.	E167040		

### TABLE

Item No.	A(mm)	A(inch)
ME730-75002	15.50	0.610
ME730-75003	23.00	0.906
ME730-75004	30.50	1.201
ME730-75005	38.00	1.496
ME730-75006	45.50	1.791
ME730-75007	53.00	2.087
ME730-75008	60.50	2.382
ME730-75009	68.00	2.677
ME730-75010	75.50	2.972
ME730-75011	83.00	3.268
ME730-75012	90.50	3.563
ME730-75013	98.00	3.858
ME730-75014	105.50	4.154
ME730-75015	113.00	4.449
ME730-75016	120.50	4.744
ME730-75017	128.22	5.039
ME730-75018	135.50	5.335
ME730-75019	143.00	5.630
ME730-75020	150.50	5.925
ME730-75021	158.00	6.220
ME730-75022	165.50	6.516

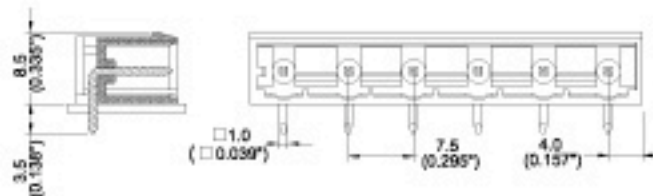


### PCB Layout

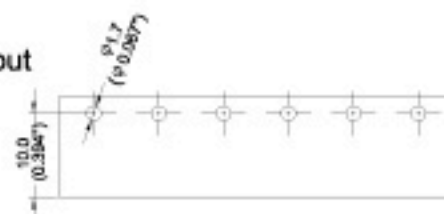

Pitch: 7.62mm(0.300inch)



- **Description :**
- Pitch : 7.62mm (0.300inch)

C  US**SPECIFICATIONS**


			CUL
負載電壓	Rated Voltage	Bemessungsspannung	300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□ 1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ 1.7mm
UL File No.	E167040		

TABLE

Item No.	A(mm)	A(inch)
ME730-76202	15.62	0.615
ME730-76203	23.24	0.915
ME730-76204	30.86	1.215
ME730-76205	38.48	1.515
ME730-76206	46.10	1.815
ME730-76207	53.72	2.115
ME730-76208	61.34	2.415
ME730-76209	68.96	2.715
ME730-76210	76.58	3.015
ME730-76211	84.20	3.315
ME730-76212	91.82	3.615
ME730-76213	99.44	3.915
ME730-76214	107.06	4.215
ME730-76215	114.68	4.515
ME730-76216	122.30	4.815
ME730-76217	129.92	5.115
ME730-76218	137.54	5.415
ME730-76219	145.16	5.715
ME730-76220	152.78	6.015
ME730-76221	160.40	6.315
ME730-76222	168.02	6.615

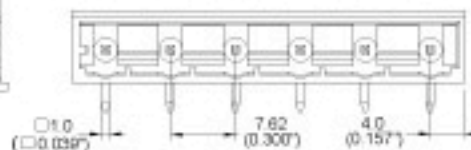


PCB Layout

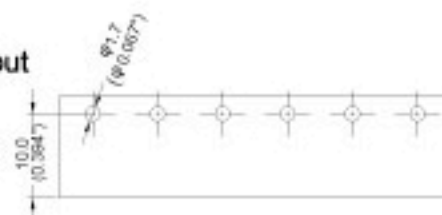

Pitch: 5.00mm(0.197inch)

- **Description :**
- Pitch : 5.00mm (0.197inch)






## SPECIFICATIONS


			CUL
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.8mm
UL File No.	E167040		

### TABLE

Item No.	A(mm)	A(inch)
ME735-50002	13.2	0.523
ME735-50003	18.3	0.723
ME735-50004	23.4	0.923
ME735-50005	28.5	1.123
ME735-50006	33.6	1.323
ME735-50007	38.6	1.523
ME735-50008	43.7	1.723
ME735-50009	48.8	1.923
ME735-50010	53.9	2.123
ME735-50011	59.0	2.323
ME735-50012	64.0	2.523
ME735-50013	69.1	2.723
ME735-50014	74.2	2.923
ME735-50015	79.3	3.123
ME735-50016	84.4	3.323
ME735-50017	89.4	3.523
ME735-50018	94.5	3.723
ME735-50019	99.6	3.923
ME735-50020	104.7	4.123
ME735-50021	109.8	4.323
ME735-50022	114.8	4.523
ME735-50023	119.9	4.723
ME735-50024	125.0	4.923

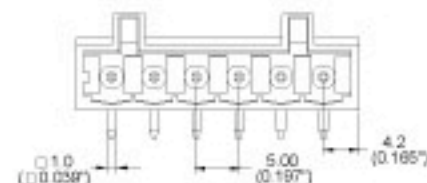


### PCB Layout

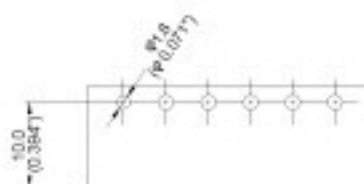



Pitch: 5.08mm(0.200inch)

- **Description :**
- Pitch : 5.08mm (0.200inch)







## SPECIFICATIONS

			CUL
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
焊針	Solder Pin	Lötstift	□1.0mm, Brass, Tin plated
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.7mm
UL File No.	E167040		

### TABLE

Item No.	A(mm)	A(inch)
ME735-50802	13.4	0.528
ME735-50803	18.4	0.724
ME735-50804	23.4	0.921
ME735-50805	28.4	1.118
ME735-50806	33.4	1.315
ME735-50807	38.4	1.512
ME735-50808	43.4	1.709
ME735-50809	48.4	1.906
ME735-50810	53.4	2.102
ME735-50811	58.4	2.299
ME735-50812	63.4	2.496
ME735-50813	68.4	2.693
ME735-50814	73.4	2.890
ME735-50815	78.4	3.087
ME735-50816	83.4	3.283
ME735-50817	88.4	3.480
ME735-50818	93.4	3.677
ME735-50819	98.4	3.874
ME735-50820	103.4	4.071
ME735-50821	108.4	4.268
ME735-50822	113.4	4.465
ME735-50823	118.4	4.661
ME735-50824	123.4	4.858

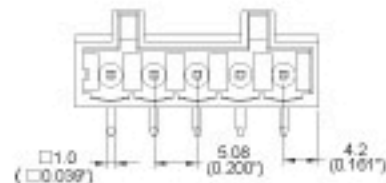

### PCB Layout

