

AP AUSPICIOUS

CONTROL COMPONENTS 歐式防水型按鈕開關



2008/B



22ø,30ø SERIES CONTROL UNITS IP65



Standard and Certifications

CSA Certified 1689803



CSA認證相關資料

Applicable Requirements

CAN/CSA-C22.2 NO. 0 – M91, General Requirements – Canadian Electrical Part II

CAN/CSA-C22.2 NO.14.05-Industrial Control Equipment

CSA Std C22.2 NO.65.93-Wire Connector

UL File NO. E247577



UI認證相關資料

UL Std NO. 508, 17th Ed-Industrial Control Equipment to the requirements of CSA standard NO. 14-05
Auxiliary device, contact rated 120VAC 6A, resistive, heavy pilot duty or A600 with NC and NO contact,
used

for push button switches, selector switches, double push button switches, push button switches with
illuminated, selector switch with illuminated, pilot lights.

TUV Rheinland Group



TUV認證相關資料

License No. R50062119

EN 60947-1 : 2004

EN 60947-5-1 : 2004

License No. R50062158

EN 60947-1 : 2004

EN 60947-5-1 : 2004

EN 60947-5-5 : 1997

CE Marked : EN60947-5-1

可鑫科技股份有限公司

益成自動控制材料行

TEL:06-3585914 / FAX:06-3585914

LINE:@ENPRO

E-MAIL:INFO@ENPROTEK.COM

WEB:WWW.ENPROTEK.COM

Rating :

Thermal current 1th 10A 50/60HZ

Insulation Voltage Ui 600V

Enclosed thermal current 1the 10A

Short-Circuit current 1000A

AC-15 120V 6A, 240V 3A

AC-12 480V 1.5A, 600V 1.2A

DC-12 120V 2.2A, 240V 0.6A, 480V 0.4A

IP-Enclosure IP65

Ambient temperature :-20 to 60°C

Contact resistance : 50 mΩ max.

產品規格：

接點最大熱電壓熱電流600V 10A

防護等級 IP65

工作溫度 -20°C~60°C

接點接觸點阻 最大50mΩ

接點額定值：

AC-15 120V 6A, 240V 3A

AC-12 480V 1.5A, 600V 1.2A

DC-12 120V 2.2A, 240V 0.6A

480V 0.4A

Life :

Push buttons : 1 million operations

Contact blocks : 1 million operations

Selector and key selector : 600,000 operations

工作壽命：


按鈕開關 1百萬次以上

選擇與鑰匙開關 600,000以上

電氣壽命 1百萬次以上

22ø,30ø SERIES CONTROL UNITS

Panel cut - out



Components parts

Dimensions


	Series	22ø	25ø	30ø
A	Standard spacing	30	30	38
	Mushroom head 40ø	42	42	42
	Long knob selector	44	44	44
B		24.2	26.6	32
C		22.5ø	25.4ø	30.5ø

S-9 Filament Lamp Rated Voltage 鎢絲燈泡



6V, 12V, 24V, 30V
 36V, 48V, 60V

Lamp holder, contact block 1/O or 1/C with coupler 接點連接座含燈座




S-9 Neon Lamp Rated Voltage 氬氣燈泡



110V, 220V, 380V, 440V
 colour : Red, Green

Contact block 1/O (N/O), (1a) A接點
 1/C (N/C), (1b) B接點




S-9 Led Lamp Rated Voltage LED燈泡




6V, 12V, 24V
 110V/220V
 220V/440V
 colour : Red, Green,
 Orange Yellow, Blue,
 White

Contact block with coupler 1O/C,(N/O+N/C),(1a+1b) 接點連接座含接點




Lamp Holder 燈座




PILOT LAMP, 22 ϕ , 25 ϕ , 30 ϕ IP65

Type	Mounting hole	Voltage	Lens colour	Lens colour
PLN22	22 : 22 ϕ	1 110V	● R: Red	L: Led
PLNS22	25 : 25 ϕ	2 220V	● G: Green	F: Filament bulb
PLN22A, PLN25A	25 : 25 ϕ	3 380V	● Y: Yellow	N: Neon lamp
PLN22B, PLN25B	30 : 30 ϕ	4 440V	● O: Orange	L: LED燈
PLN22C, PLN25C		5 6V	● BL: Blue	F: 鎢絲燈
L22		6 12V	○ C: Clear	N: 氖氣燈
PLN30		7 24V	○ W: White	
PLT22 W/TR		8 30V		


PLN-22 22 ϕ 平頭指示燈

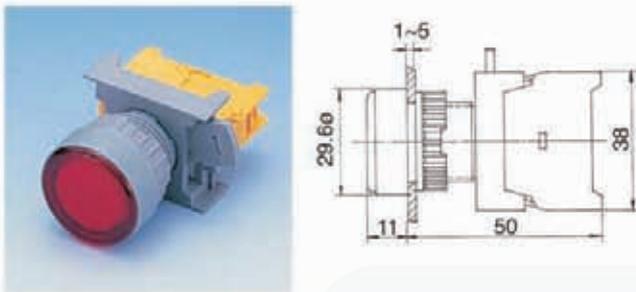


PLN-30 30 ϕ 凸頭指示燈

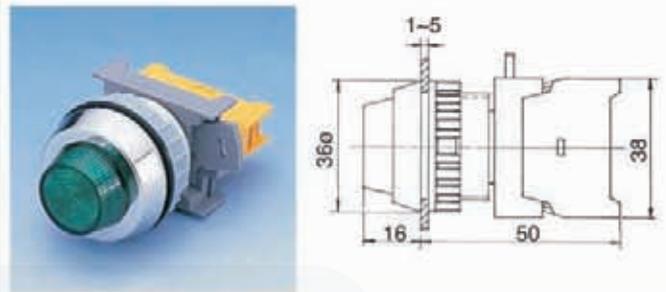


PLNS-22 22 ϕ 方框指示燈

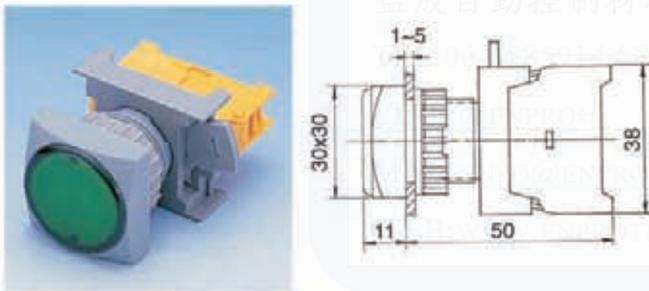


PLN-22C 22 ϕ C型指示燈
PLN-25C 25 ϕ C型指示燈

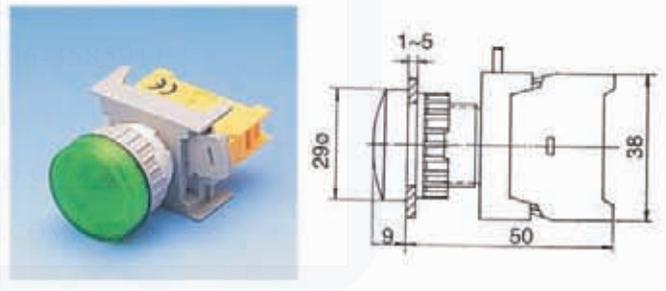


PLN-22A 22 ϕ 凸頭指示燈
PLN-25A 25 ϕ 凸頭指示燈

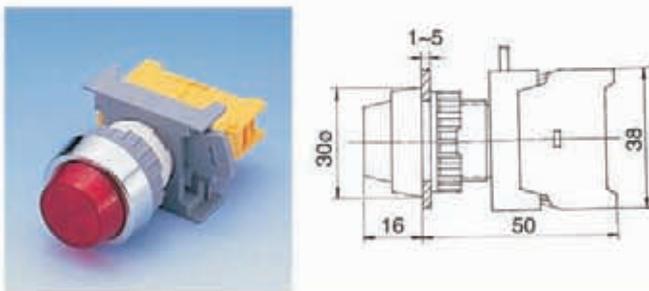


L22, 22 ϕ LED lamp 22 ϕ 經濟型指示燈

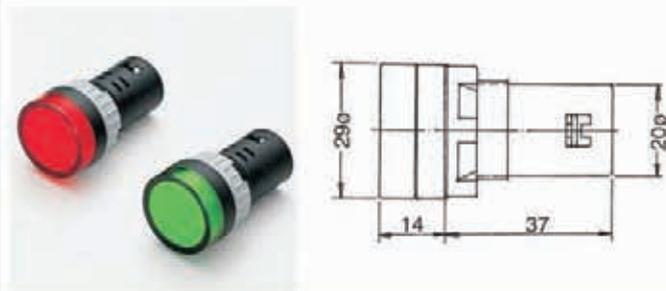

PLN-22B 22 ϕ B型指示燈
PLN-25B 25 ϕ B型指示燈

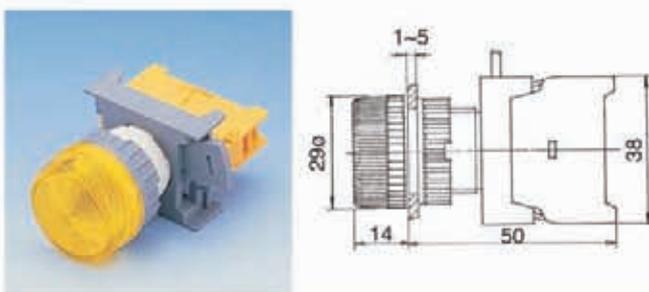

PLT-22 Transformer pilot lamp 22 ϕ 變壓器式指示燈

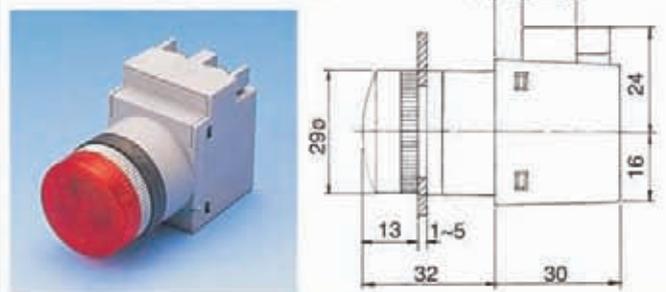


PUSH BUTTON SWITCHES, IP65

XB	22	1	O/C	R
Type	Mounting hole	No. of contact	Type of contact	Lens colour
XB, GBF, PBF: Flat head XBL, GBL, PBL: Long head XBS: Square head XLS: Square long head XBG: Guard ring XGS: Guard ring square XE, EB, GEB, XES: Mushroom head 40 ϕ BXE, BEB: Mushroom head 60 ϕ LEB, GLEB: Latching head PF, EPF, GPF, GEPF: Push on-Push off	22 : 22 ϕ 30 : 30 ϕ	1 2 3 4	O: N/O(a) C: N/C(b) O/C: N/O+N/C 1a+1b O: 1A接點 C: 1B接點 O/C: 1A1B接點	● R: Red ● G: Green ● Y: Yellow ● BL: Blue ● BK: Black ○ W: White


XB22-1/O

22 ϕ XB型平頭按鈕




XLS22-1/O XLS22-10/C
XLS22-1/C

22 ϕ 方框凸頭按鈕




XB22-10/C

22 ϕ XB型平頭按鈕
 (1A1B接點)




XBG22-1/O XBG22-10/C
XBG22-1/C

22 ϕ 護圈型平頭按鈕




XBL22-1/O XBL22-10/C
XBL22-1/C

22 ϕ 凸頭按鈕




XGS22-1/O XGS22-10/C
XGS22-1/C

22 ϕ 護圈型方框平頭按鈕




XBS22-1/O XBS22-10/C
XBS22-1/C

22 ϕ 方框平頭按鈕



XE22-1/O XE22-10/C
XE22-1/C

22 ϕ XE型大頭按鈕




PUSH BUTTON SWITCHES, IP65

BXE22-1/O
 BXE22-1/C




BXE22-10/C
 22φ BXE型特大頭按鈕

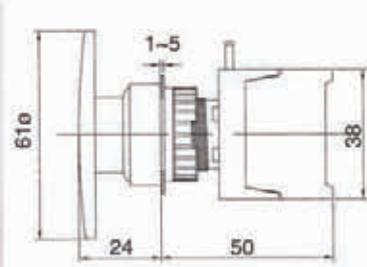

XES22-1/O
 XES22-1/C




XES22-10/C
 22φ 方框大頭按鈕

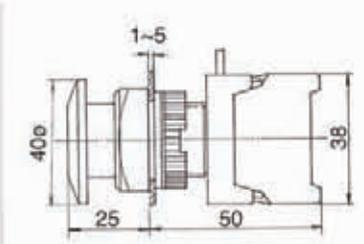

GBF22-1/O
 GBF22-1/C




GBF22-10/C
 22φ GBF型平頭按鈕

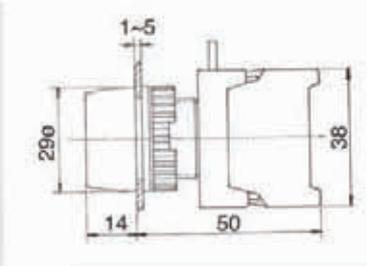

GEB22A-1/O
 GEB22A-1/C




GEB22A-10/C
 22φ GEB型特大頭按鈕

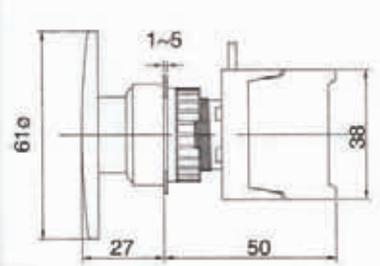


GPF22-10/C

22φ 維持型平頭按鈕

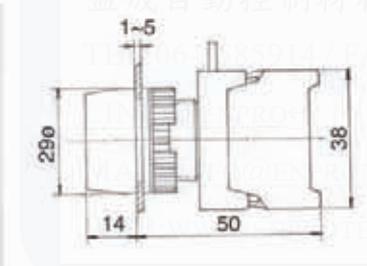


GLEB22-1/C

22φ GLEB型緊急按鈕
 (1B接點)

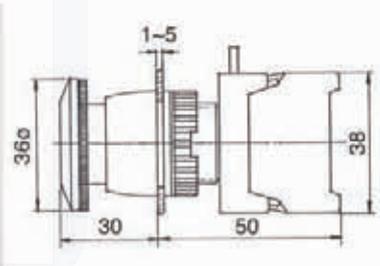


GEPF22-10/C

22φ 維持型大頭按鈕

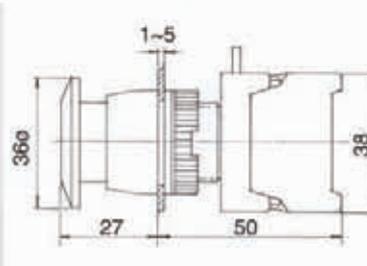

GLEB22-10/C


22φ GLEB型緊急按鈕
 (1A1B接點)

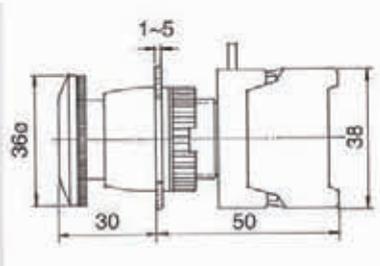

GEB22-1/O
 GEB22-1/C




GEB22-10/C
 22φ GEB型大頭按鈕

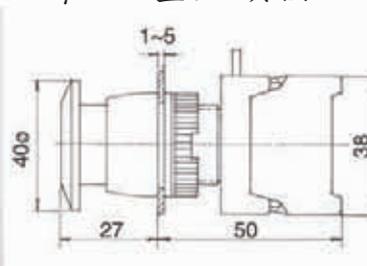


LMB22-1/C

LMB22-10/C Latching stop
 22φ LMB型緊急按鈕

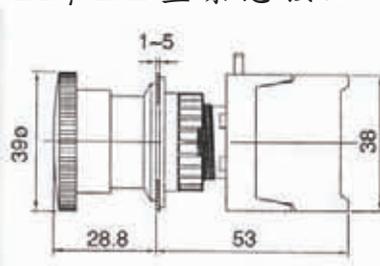

PUSH BUTTON SWITCHES, IP65


PBF22-1/O(N/O) 22φ 電鍍環平頭按鈕
PBF22-1/C(N/C)




EB22-1/O
EB22-1/C



EB22-10/C
 22φ 電鍍環大頭按鈕

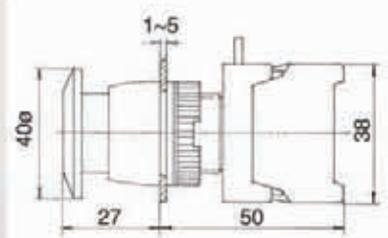


PBF22-10/C 22φ 電鍍環平頭按鈕
 (1A1B接點)



BEB22-1/O
BEB22-1/C




BEB22-10/C
 22φ 電鍍環特大頭按鈕

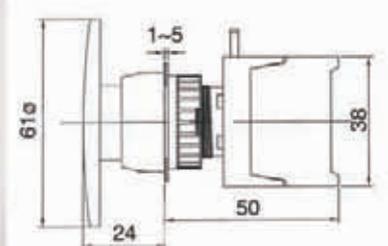


PBL22-1/O
PBL22-1/C




PBL22-10/C
 22φ 電鍍環凸頭按鈕




LEB22-1/C Latching 22φ 電鍍環緊急按鈕
 (1B接點)

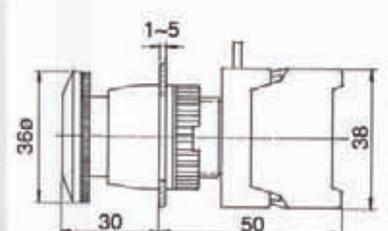


PF22-10/C Push ON-Push OFF
 22φ 電鍍環維持型平頭按鈕



LEB22-10/C Latching 22φ 電鍍環緊急按鈕
 (1A1B接點)

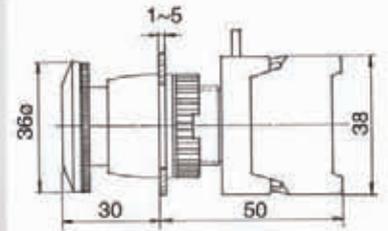

EPF22-10/C Push ON-Push OFF
 22φ 電鍍環維持型大頭按鈕




ILLUMINATED PUSH BUTTON SWITCHES, IP65



Type	Mounting hole	Voltage	No. of contact	Type of contact	Lens colour	Bulb type
LBF, LXB: GLBF, PFL, GPFL: Flat head LBS: Square head	22 : 22 ϕ 30 : 30 ϕ	1: 110V 2: 220V	1 2	O: N/O(a) C: N/C(b)	● R: Red ● G: Green ● Y: Yellow ● BL: Blue ○ W: White	L: Led F: Filament bulb N: Neon lamp
LBL, LXL: Long head LXG: Guard head LXLS: Long head square LXGS: Guard head square		3: 380V 4: 440V 5: 6V 6: 12V 7: 24V	3 4	O/C: N/O+N/C 1a+1b O: 1A接點 C: 1B接點 O/C: 1A1B接點		L: LED燈 F: 鎢絲燈 N: 氬氣燈
EBL, LXE EPFL: Mushroom head 40 ϕ BLXE: Mushroom head 60 ϕ LXES: Mushroom head square 40 ϕ						


LXB22-1/O
LXB22-1/C

LXB22-10/C
22 ϕ LXB型照光平頭按鈕




LXG22-10/C

22 ϕ 護圈型照光平頭按鈕
(1A1B接點)

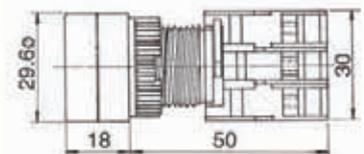


LBS22-1/O
LBS22-1/C

LBS22-10/C
22 ϕ 方框照光平頭按鈕




LXLS22-1/O
LXLS22-1/C

LXLS22-10/C
22 ϕ 方框照光凸頭按鈕

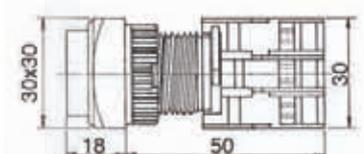


LXL22-1/O
LXL22-1/C

LXL22-10/C
22 ϕ LXL型照光凸頭按鈕

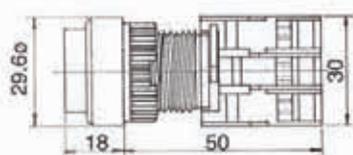


LXGS22-1/O
LXGS22-1/C

LXGS22-10/C
22 ϕ 方框護圈照光平頭按鈕

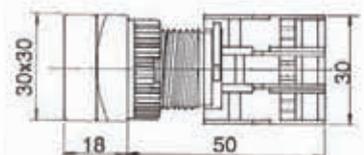


LXG22-1/O
LXG22-1/C

22 ϕ 護圈型照光平頭按鈕

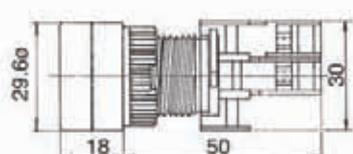


LXE22-1/O
LXE22-1/C

LXE22-10/C
22 ϕ LXE型照光大頭按鈕

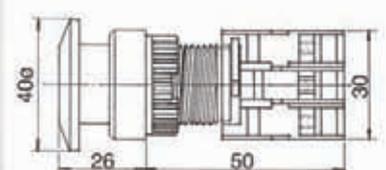


ILLUMINATED PUSH BUTTON SWITCHES, IP65


BLXE22-1/O BLXE22-10/C
 BLXE22-1/C 22φ BLXE型照光特大頭按鈕

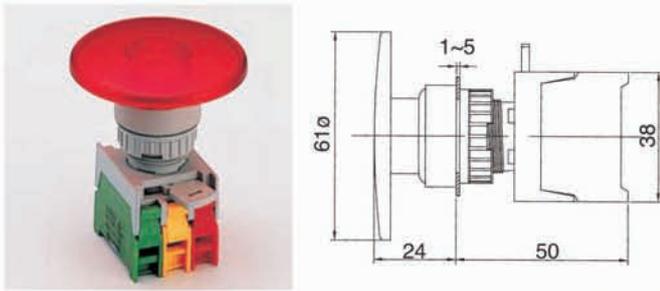


GEBL22A-1/O GEBL22A-10/C
 GEBL22A-1/C 22φ GEBL型照光特大頭按鈕

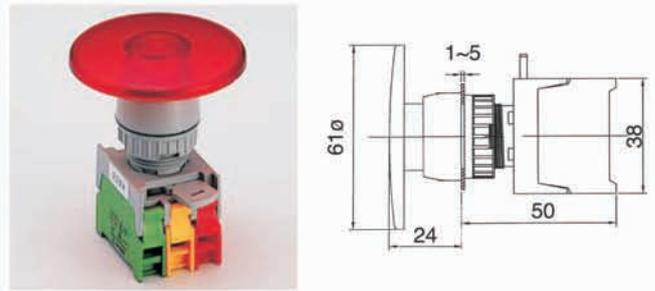


LXES22-1/O LXES22-10/C
 LXES22-1/C 22φ 方框照光大頭按鈕

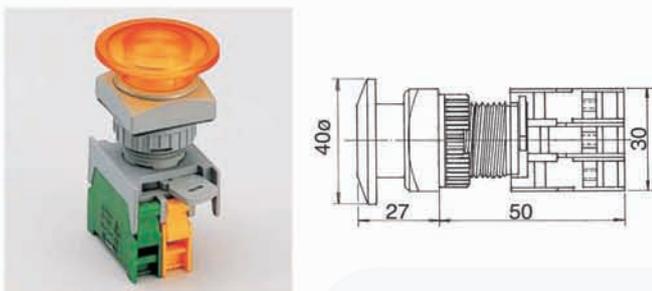


GPFL22-10/C Push ON-Push OFF
 22φ 維持型照光平頭按鈕

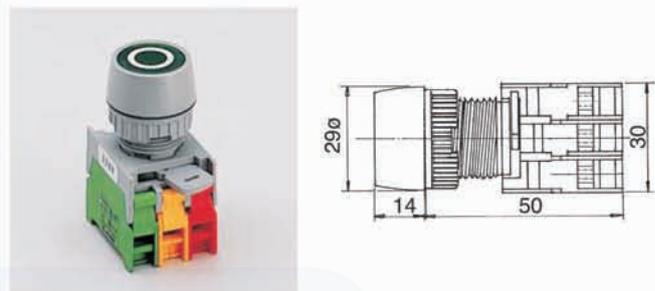


GLBF22-1/O GLBF22-10/C
 GLBF22-1/C 22φ GLBF照光平頭按鈕

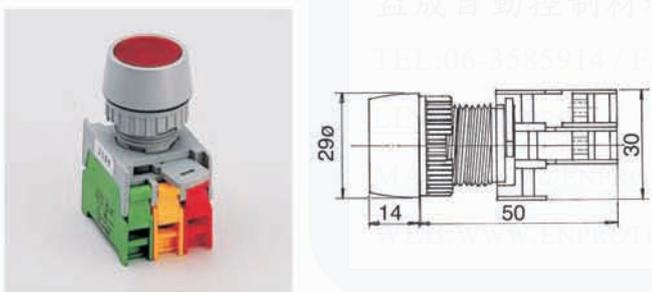


GEPFL22-10/C Push ON-Push OFF
 22φ 維持型照光大頭按鈕

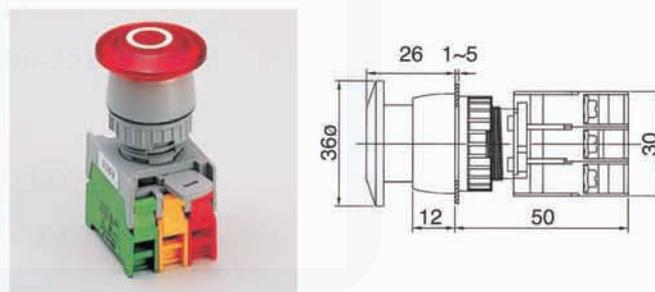


GLBL22-1/O GLBL22-10/C
 GLBL22-1/C 22φ GLBL型照光凸頭按鈕

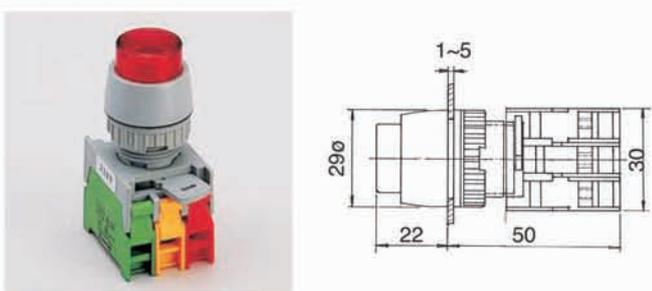

MBL22-1/C Illuminated latching stop
 22φ 照光緊急按鈕

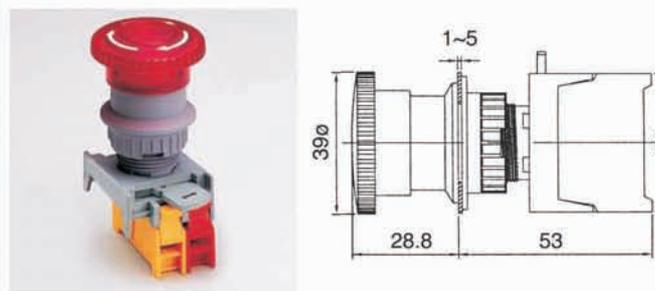


GEBL22-1/O GEBL22-10/C
 GEBL22-1/C 22φ GEBL型照光大頭按鈕

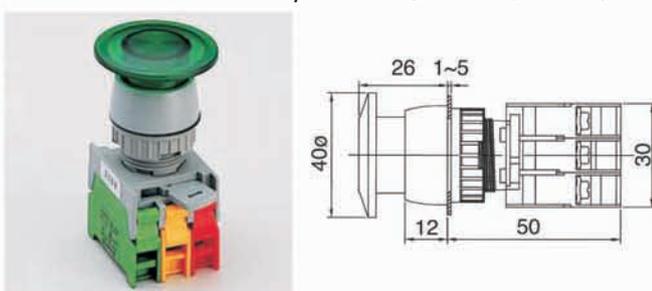


ILLUMINATED PUSH BUTTON
 SWITCHES,IP65



LBF22-1/O Illuminated
 LBF22-1/C 22φ 電鍍環照光平頭按鈕




EPFL22-10/C Push ON-Push OFF Illuminated
 22φ 電鍍環維持型照光大頭按鈕

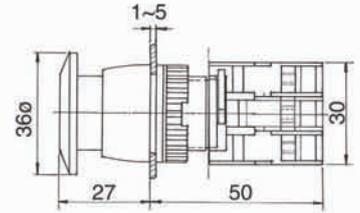


LBF22-10/C Illuminated
 22φ 電鍍環照光平頭按鈕
 (1A1B接點)




LBL22-1/O LBL22-10/C Illuminated
 LBL22-1/C 22φ 電鍍環照光凸頭按鈕



EBL22-1/O EBL22-10/C Illuminated
 EBL22-1/C 22φ 電鍍環照光大頭按鈕



PFL22-10/C Push ON-Push OFF Illuminated
 22φ 電鍍環維持型照光平頭按鈕




SELECTOR SWITCHES, LEVER
SWITCHES, IP65




Type	Mounting hole	Position	No. of contact	Type of contact	Lens colour
CS, GCS: Knob type LCS, GLCS: Long Knob RS, GRS: Long & spring return LRS, GLRS: Long knob spring return LS, GLS: Lever type LUS, GLUS: Lever & spring return KS, GKS: Key type drawable KSN, GKSN: Key type Non draw KSR, GKSR: Key type spring return	22 : 22φ 30 : 30φ	2: 2段 Position 3: 3段 Position	1 2 3 4	O: 1/O, N/O 1A接點 C: 1/C N/C 1B接點 O/C: N/O+N/C 1A1B接點 2/O: 2N/O 2A接點 2/C: 2N/C 2B接點	● R: Red ● G: Green ● Y: Yellow ● BK: Black

2 Position	2 Position	3 Position	2 Position Spring return	3 Position Spring return	3 Position rreturn one side
2段維持	2段維持	3段維持	2段右復歸	3段左右復歸	3段左復歸右維持 3段左維持右復歸


CS22-1/O, 0-1 CS22-10/C 1-2
CS22-1/C, 1-0 22φ 2段短柄電鍍環選擇

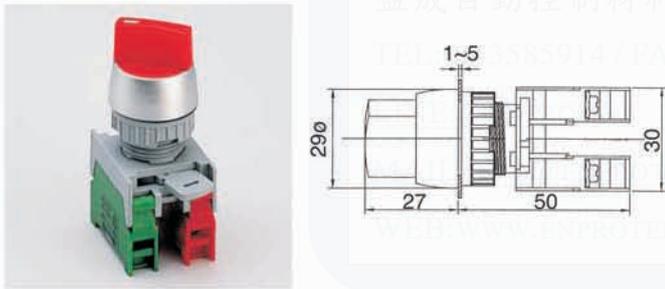


LCS22-2/O, 2N/O 1-0-2
22φ 3段長柄電鍍環選擇

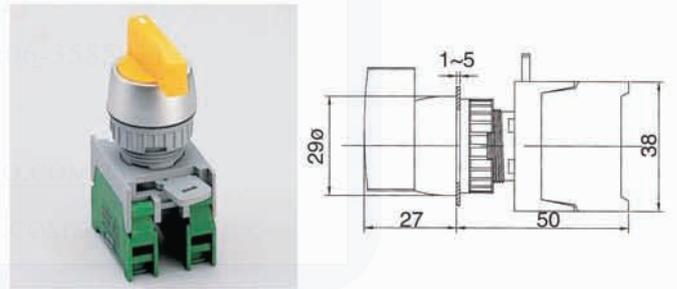


CS22-2/O, 2N/O 1-0-2
22φ 3段短柄電鍍環選擇

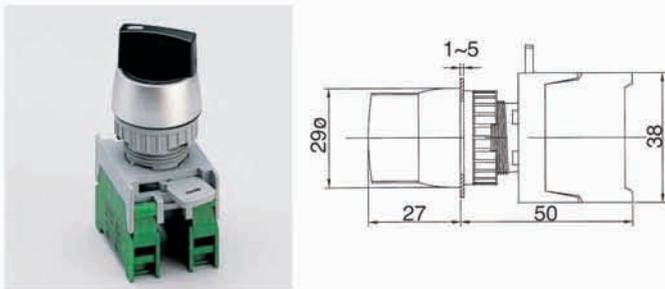


RS22-1/O 0←1 RS22-1/C 1←0 22φ 2段短柄電鍍環復歸選擇

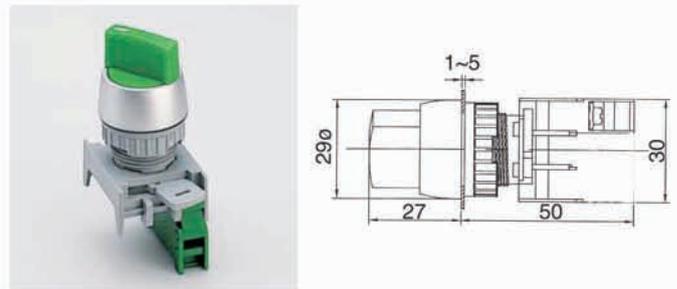

LCS22-1/O, 0-1 LCS22-10/C 1-2
LCS22-1/C, 1-0 22φ 2段長柄電鍍環選擇

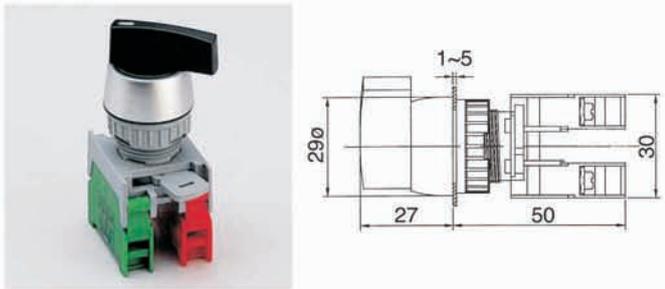


LRS22-1/O 0←1 LRS22-1/C 1←0 22φ 2段長柄電鍍環復歸選擇

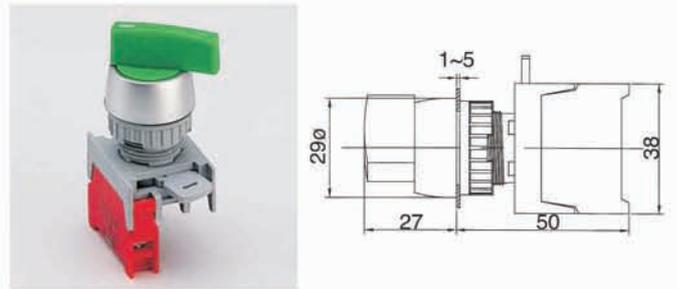




LEVER AND KEY SELECTOR SW.IP65


LRS22-10/C 1←2 (1A1B接點)
22φ2段長柄電鍍環復歸選擇

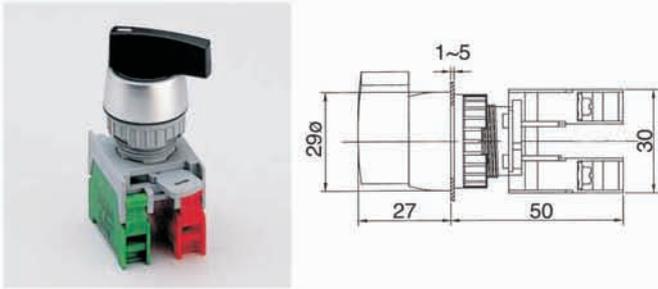


KS22-1/O 0-1 22φ2段電鍍環兩邊可抽鑰匙
KSN22-1/O 0-1 22φ2段電鍍環單抽鑰匙

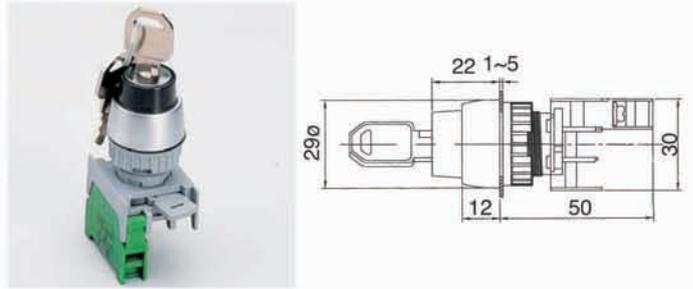


LRS22-2/O 1→0←2
22φ3段長柄電鍍環復歸選擇

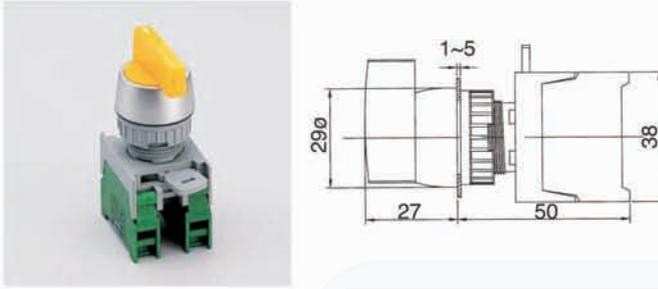


KS22-10/C 0-1 22φ2段電鍍環兩邊可抽鑰匙
KSN22-10/C 0-1 22φ2段電鍍環單抽鑰匙
(1A1B接點)

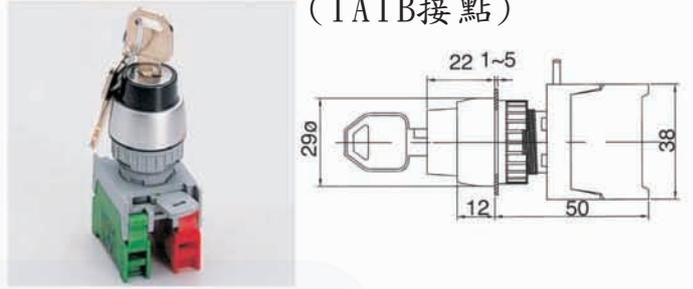


LS22-1/O 0-1
LS22-1/C 1-0 22φ2段搖柄電鍍環選擇

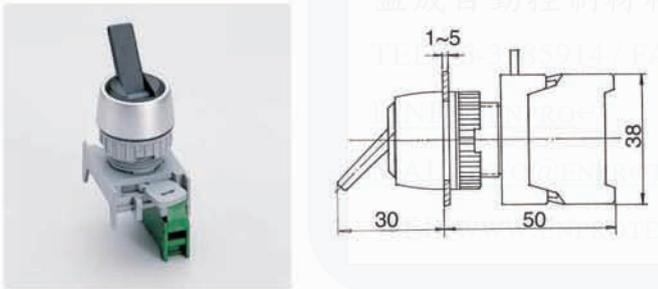


KSR22-10/C 1←2 22φ2段電鍍環復歸鑰匙

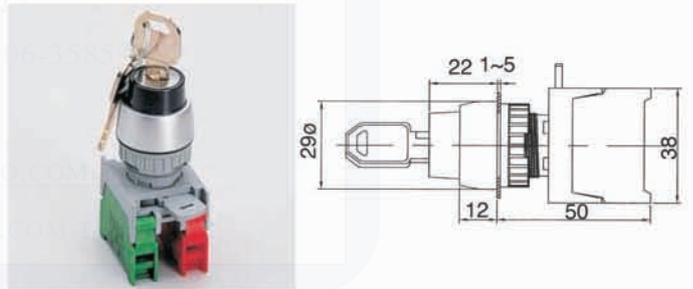


LS22-10/C 1-2
LS22-2/O 1-2 22φ2段搖柄電鍍環選擇
(1A1B或2A接點)

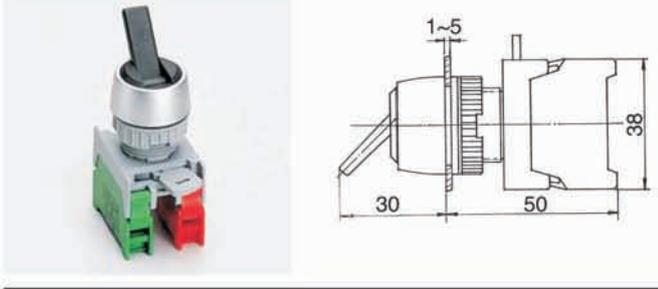


KS22-2/O 1-0-2 22φ3段電鍍環三邊可抽鑰匙
KSN22-2/O 1-0-2 22φ3段電鍍環單抽鑰匙
(2A接點)

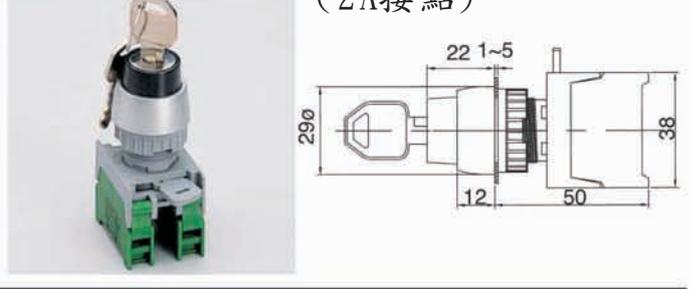

LUS22-2/O 1→0←2
LUS22-2/C 1→0←2
22φ3段搖柄電鍍環復歸選擇

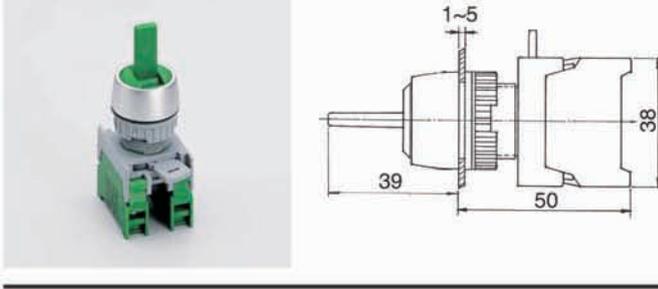


KSR22-2/O 1→0←2 (左右復歸)
KSR22A-2/O 1→0←2, KSR22B-2/O 1-0←2
(左復歸右維持) (左維持右復歸)

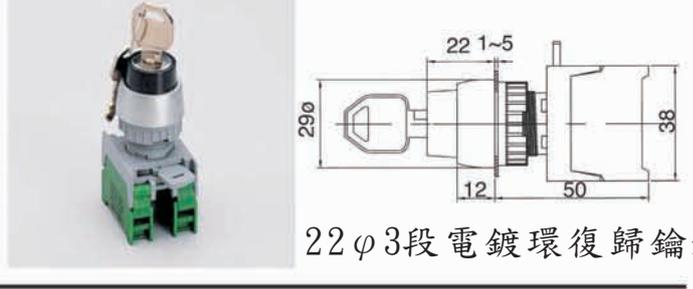


22φ3段電鍍環復歸鑰匙

SELECTOR SWITCHES, IP65


GCS22-1/O N/O,0-1, GCS22-1O/C, 1-2
 GCS22-1/C N/C,1-0 22φ 2段短柄選擇

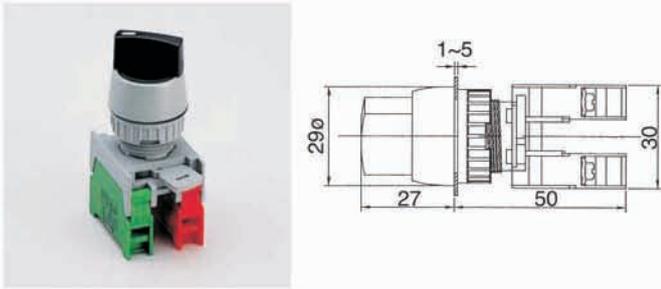


GRS22-1O/C, 1←2 22φ 2段短柄復歸選擇
 (1A1B接點)

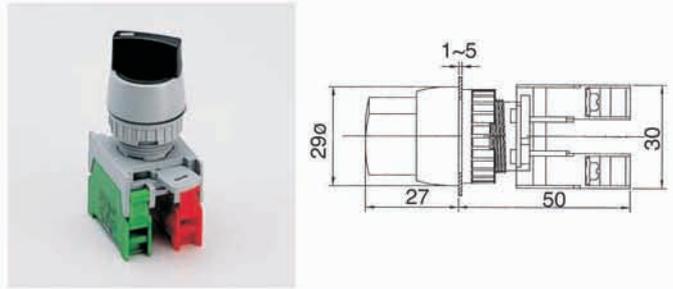


GCS22-2/O, 1-0-2 22φ 3段短柄選擇

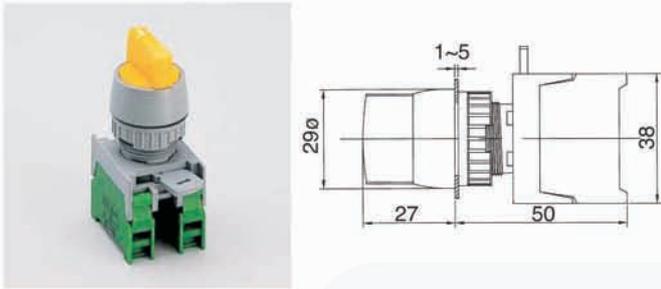


GRS22-2/O 1→0←2 (左右復歸)
 GRS22A-2/O, 1→0-2, GRS22B-2/O 1-0←2
 (左復歸右維持) (左維持右復歸)

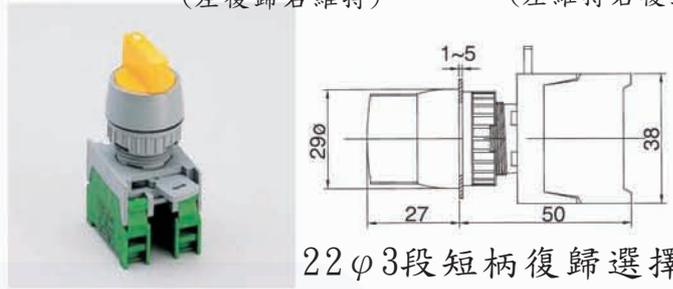


GLCS22-1/O, N/O, 0-1, GLCS22-1O/C, 1-2
 GLCS22-1/C, N/C, 1-0 22φ 2段長柄選擇

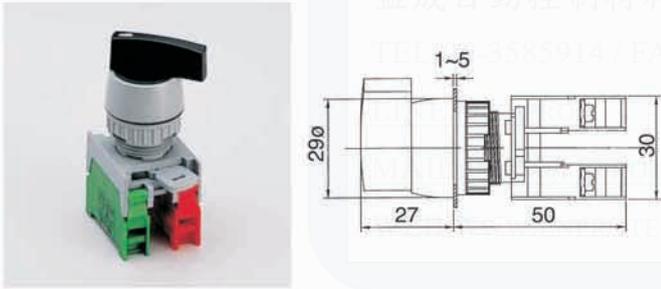


GLRS22-1/O, 0←1
 GLRS22-1/C, 1←0 22φ 2段長柄復歸選擇

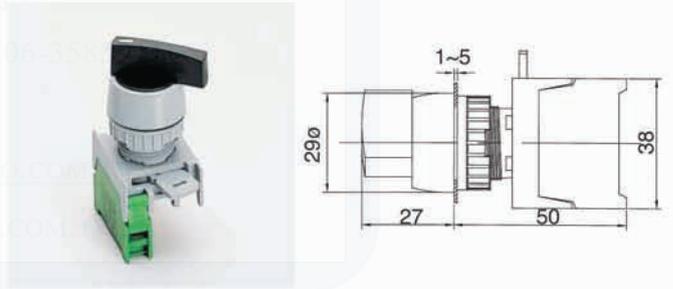


GLCS22-2/O, 1-0-2 22φ 3段長柄選擇

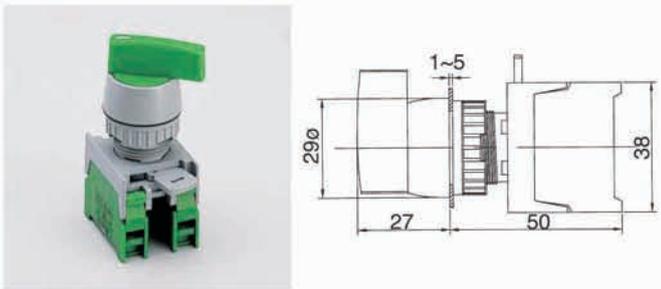


GLRS22-1O/C, 1←2 22φ 2段長柄復歸選擇
 (1A1B接點)

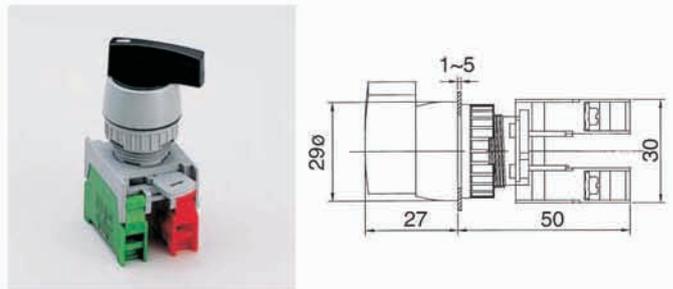

GRS22-1/O, 0←1
 GRS22-1/C, 1←0 22φ 2段短柄復歸選擇

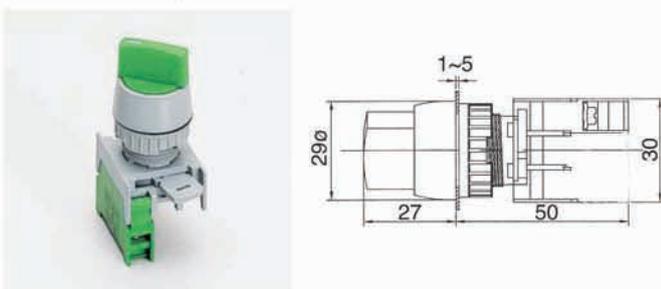


GLRS22-2/O 1→0←2 (左右復歸)
 GLRS22A-2/O, 1→0-2, GLRS22B-2/O, 1-0←2
 (左復歸右維持) (左維持右復歸)

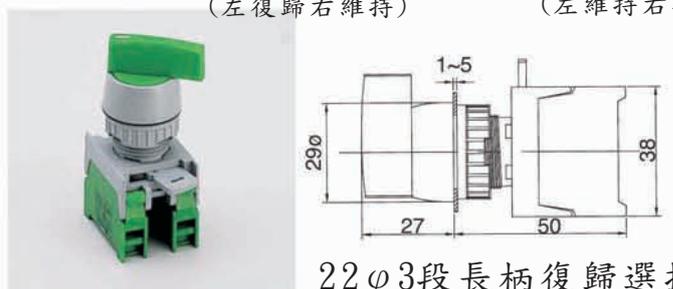


22φ 3段長柄復歸選擇

LEVER SW AND KEY SWITCHES, IP65


GLS22-1/O, 0-1 22φ 2段搖柄選擇
GLS22-1/C, 1-0 (1A或1B接點)




GKS22-2/O, 1-0-2 22φ 3段三邊可抽鑰匙
GKSN22-2/O, 1-0-2 22φ 3段單抽鑰匙
(2A接點)

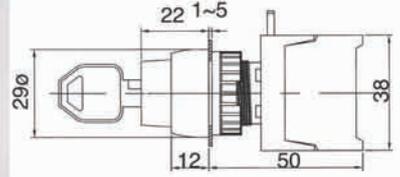


GLS22-10/C, 1-2 22φ 2段搖柄選擇
GLS22-2/O, 1-2 (1A1B或2A接點)




GKSR22-2/O, 1→0←2 22φ 3段復歸鑰匙
(左右復歸)

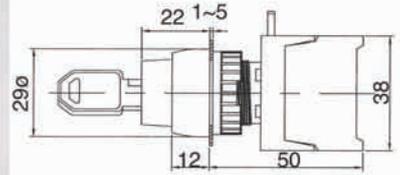


GLUS22-2/O 1→0←2 可鑫科技股份有限公司
GLUS22-2/C 1→0←2 22φ 3段搖柄復歸選擇

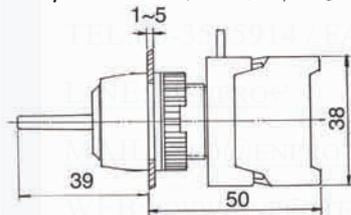


GKSR22A-2/O, 1→0-2 22φ 3段復歸鑰匙
(左復歸右維持)

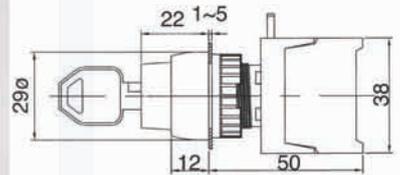


GKS22-1/O, 0-1 22φ 2段兩邊可抽鑰匙
GKSN22-1/O, 0-1 22φ 2段單抽鑰匙
(1A接點)

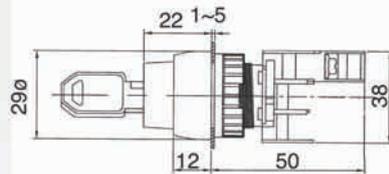


GKSR22B-2/O, 1-0←2 22φ 3段復歸鑰匙
(左維持右復歸)

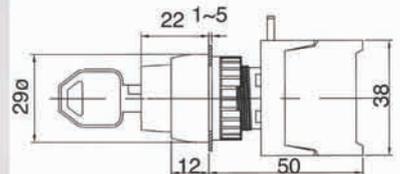

GKS22-10/C, 1-2 22φ 2段兩邊可抽鑰匙
GKSN22-10/C, 1-2 22φ 2段單抽鑰匙
(1A1B接點)

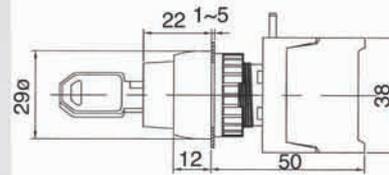


EKS22-1/O Emergency stop key switch
EKS22-10/C 22φ 緊急按鈕附鑰匙

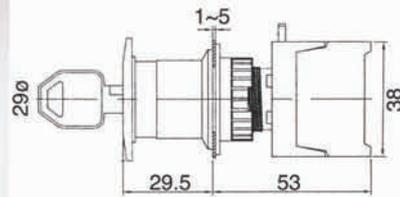


ILLUMINATED SELECTOR SWITCHES 22ø, IP65




Type	Mounting hole	Voltage	Position	No. of contact	Type of contact	Colour	Bulb type
SL, GSL: Knob type LSL, GLSL: Long Knob SRL, GSRL: Knob & spring return LSRL, GLSRL: Long Knob & spring return	22 : 22ø 25 : 25ø 30 : 30ø	1:110V 2:220V 3:380V 4:440V 5:6V 6:12V 7:24V	2:2段 Position 0-1 1-2 3:3段 Position 1-0-2	1 2 3 4	O: N/O(a) C: N/C(b) O/C: N/O+N/C O: 1A接點 C: 1B接點 O/C: 1A1B接點	● R: Red ● G: Green ● Y: Yellow ○ W: White	L: Led F: Filament bulb N: Neon lamp L: LED燈 F: 鎢絲燈 N: 氬氣燈

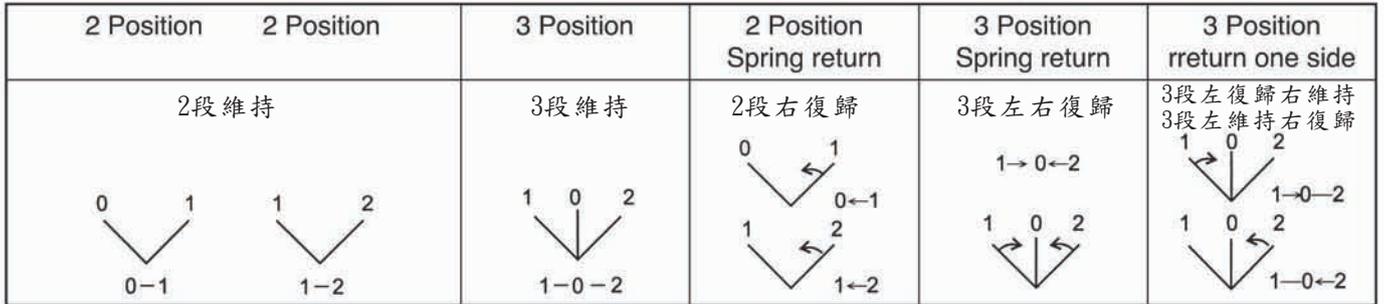


SL22-1/O, N/O, 0-1 SL22-1/C, N/C, 1-0
22φ 2段短柄電鍍環照光選擇

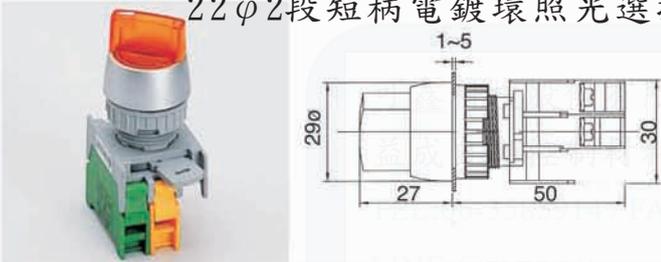


LSL22-1O/C, N/O+N/C, 1-2 (1A1B接點)
22φ 2段長柄電鍍環照光選擇

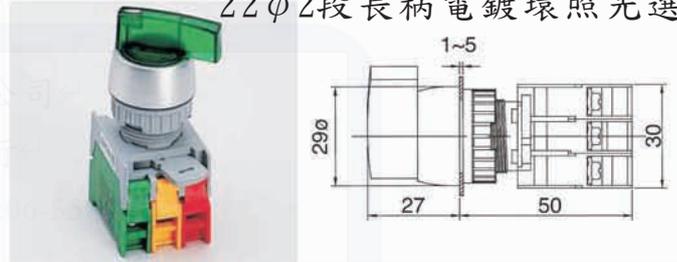


SL22-1O/C, N/O+N/C, 1-2 (1A1B接點)
22φ 2段短柄電鍍環照光選擇

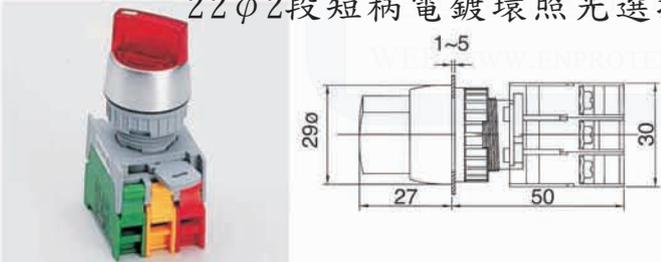


LSL22-2/O, 2N/O, 1-0-2
22φ 3段長柄電鍍環照光選擇

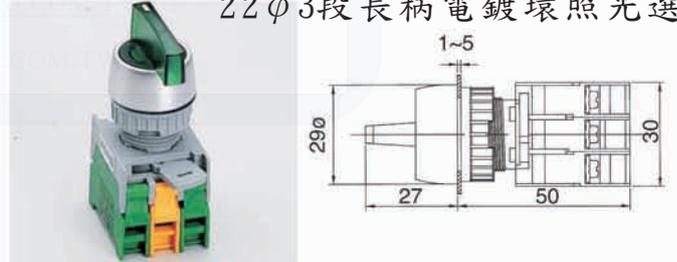


SL22-2/O, 2N/O, 1-0-2
22φ 3段短柄電鍍環照光選擇

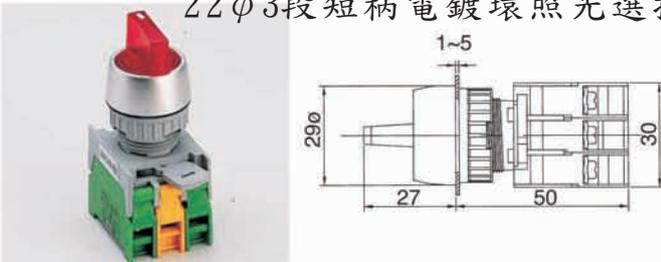


SRL22-1/O, 0-1 SRL22-1/C, 1-0
22φ 2段短柄電鍍環照光復歸選擇

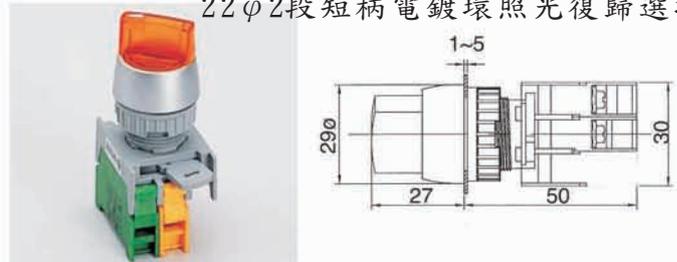

LSL22-1/O, N/O, 0-1 LSL22-1/C, N/C, 1-0
22φ 2段長柄電鍍環照光選擇

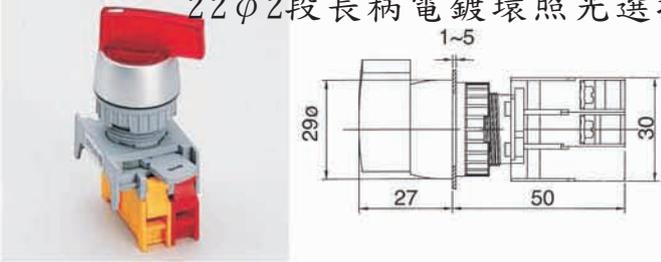


SRL22-1O/C, N/O+N/C, 1-2 (1A1B接點)
22φ 2段短柄電鍍環照光復歸選擇

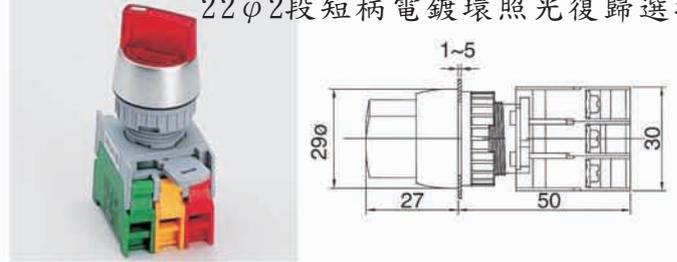




ILLUMINATED SELECTOR
 SWITCHES 22φ, IP65

SRL22-2/O, 2N/O 1→0←2 (左右復歸)
 SRL22A-2/O, 1→0←2, SRL22B-2/O, 1-0←2
 (左復歸右維持) (左維持右復歸)

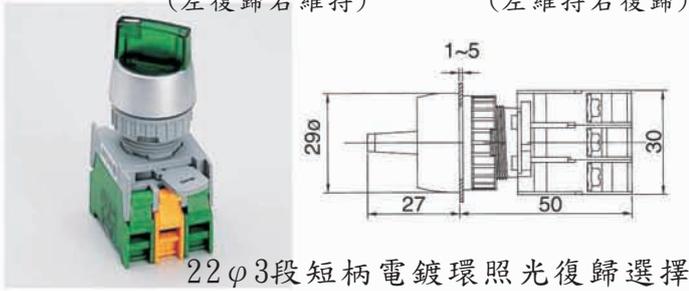


22φ 3段短柄電鍍環照光復歸選擇

GLSL-1/O 0-1, GLSL22-1/C, 1-0
 22φ 2段長柄照光選擇

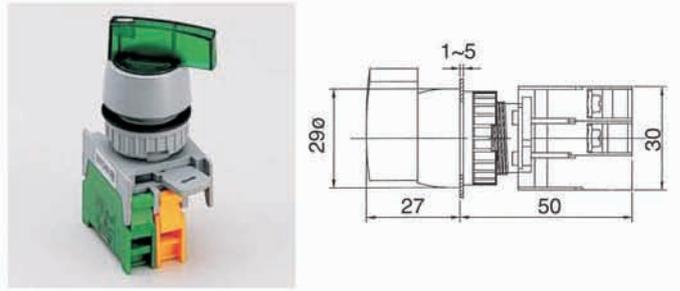


LSRL22-1/O, 0←1, LSRL22-1O/C, 1←2
 LSRL22-2/O, 1→0←2, LSRL22A-2/O, 1→0←2
 LSRL22B-2/O, 1-0←2

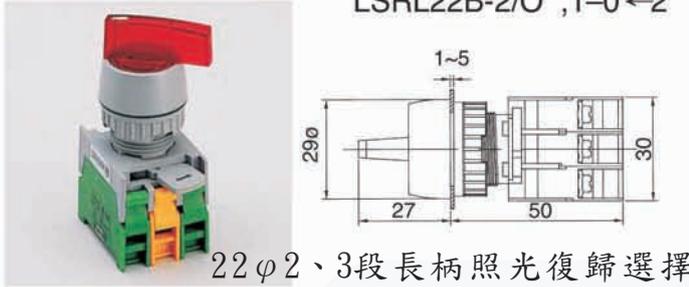


22φ 2、3段長柄照光復歸選擇


GLSL22-1O/C N/O+N/C 1-2 (1A1B接點)
 22φ 2段長柄照光選擇

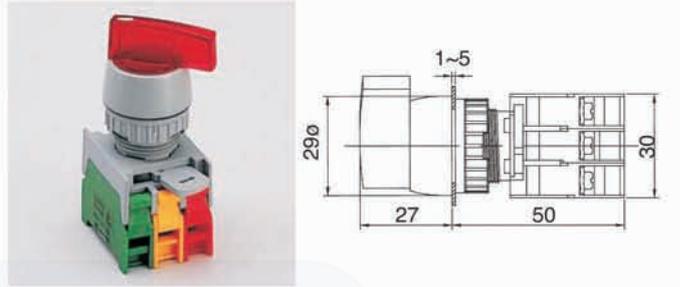


GSL22-1/O 0-1, N/O
 GSL22-1/C 1-0, N/C
 22φ 2段短柄照光選擇

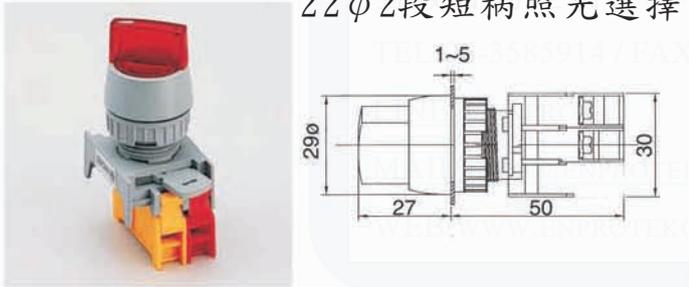


GLSL22-2/O, 2N/O, 1-0-2
 22φ 3段長柄照光選擇

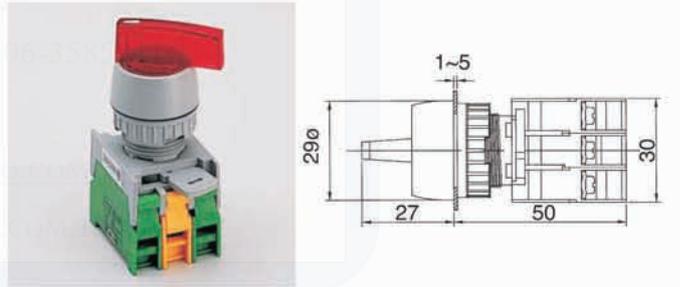

GSL22-1O/C N/O+N/C 1-2 (1A1B接點)
 22φ 2段短柄照光選擇

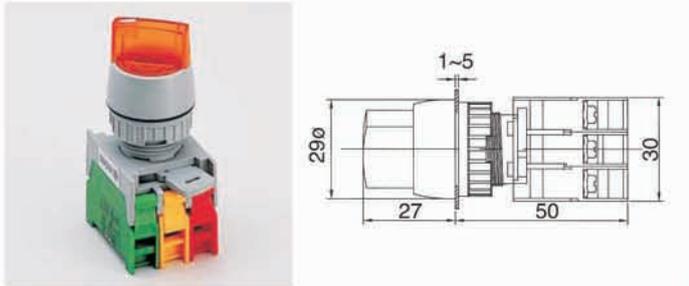


GSL22-2/O, 2N/O, 1-0-2
 22φ 3段短柄照光選擇

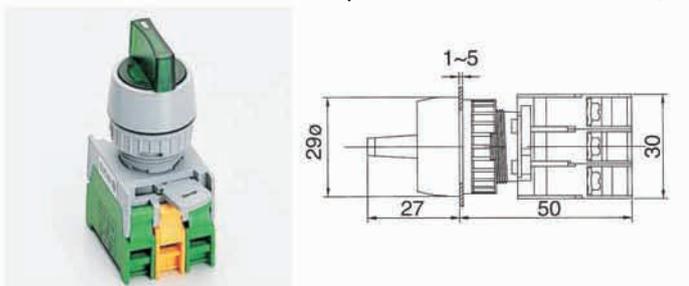




ILLUMINATED SELECTOR SWITCHES 22φ, IP65


GSRL22-1/O, 0←1, GSRL22-1/C, 1←0
GSRL22-10/C, 1←2
22φ 2段短柄照光復歸選擇

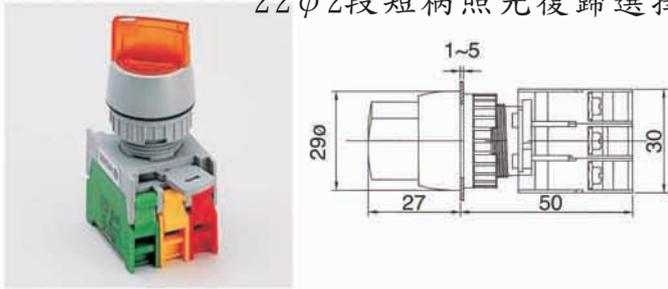


LMB 30-1/C 30φ 緊急按鈕 (1B接點)

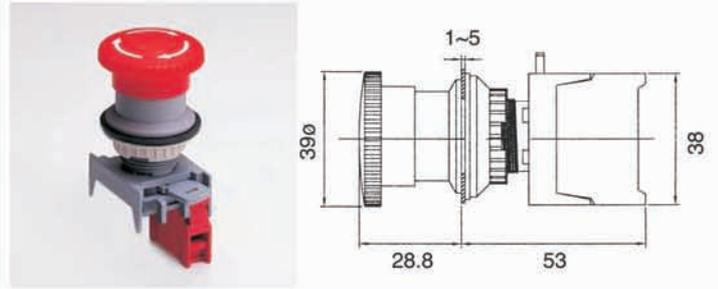


GSRL22-2/O, 2N/O, 1→0←2 (左右復歸)
GSRL22A-2/O, 1→0←2, GSRL22B, 1-0←2
(左復歸右維持) (左維持右復歸)

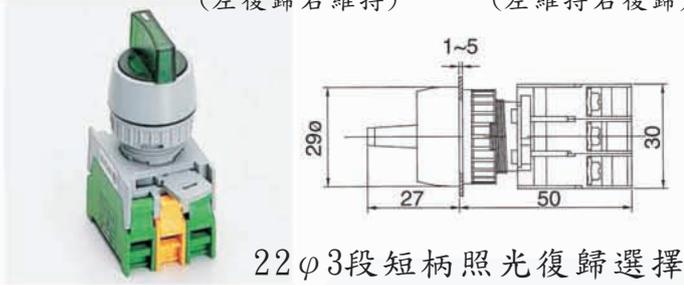


LMB 30-10/C 30φ 緊急按鈕 (1A1B接點)

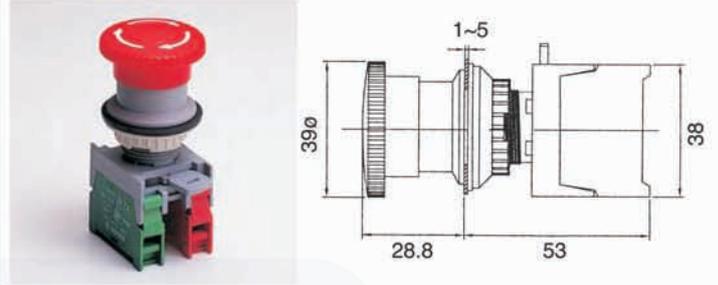


GLSRL22-1/O, 0←1
GLSRL22-10/C, 1←2
22φ 2段長柄照光復歸選擇

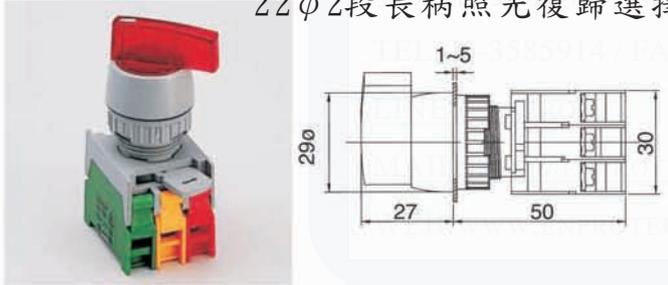


MBL 30-1/C Illuminated latching stop
30φ 照光緊急按鈕 (1B接點)

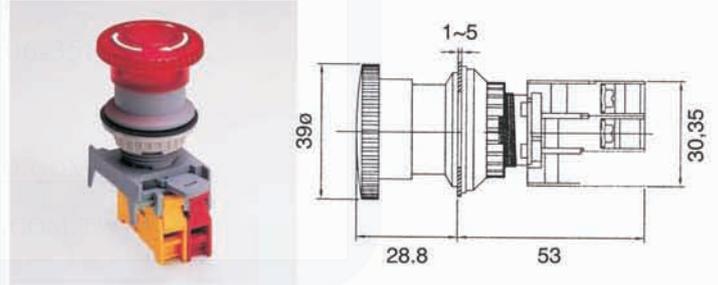


GLSRL22-2/O, 2N/O, 1→0←2 (左右復歸)
GLSRL22A-2/O, 1→0←2, GLSRL22B-2/O, 1-0←2
(左復歸右維持) (左維持右復歸)

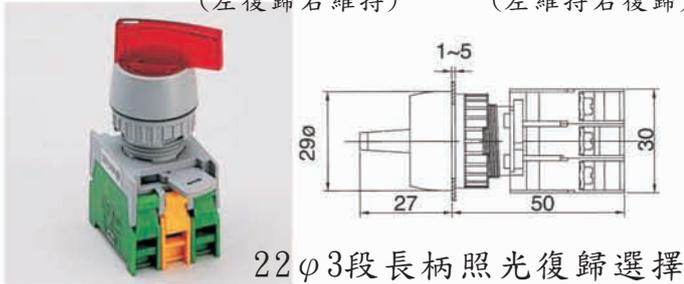

MBL 30-10/C Illuminated latching stop
30φ 照光緊急按鈕 (1A1B接點)

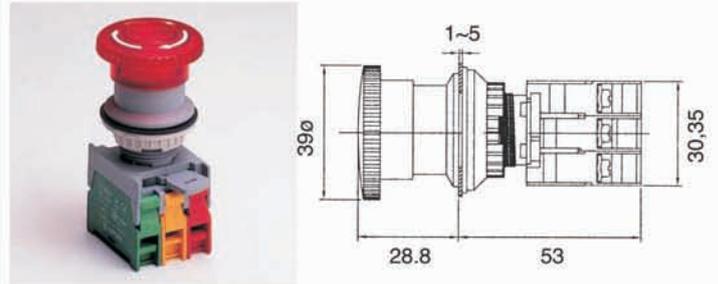


EKS 30-1/C Emergency stop key switch
EKS 30-10/C 30φ 緊急按鈕附鑰匙

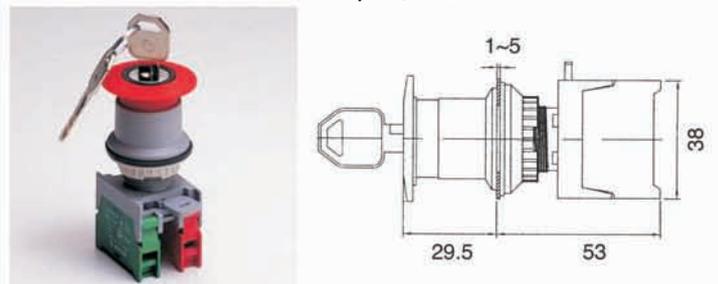

PUSH BUTTON SWITCHES 30 ϕ ,IP65



**XB30-1/O
XB30-1/C**

30 ϕ XB型平頭按鈕




**XE30-1/C
XE30-1O/C**

30 ϕ XE型大頭按鈕

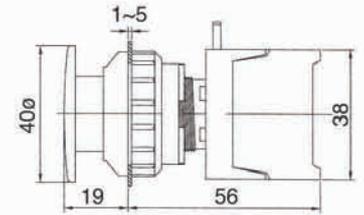



XB30-1O/C

30 ϕ XB型平頭按鈕
(1A1B接點)




**BXE30-1/C
BXE30-1O/C**

30 ϕ BXE型特大頭按鈕

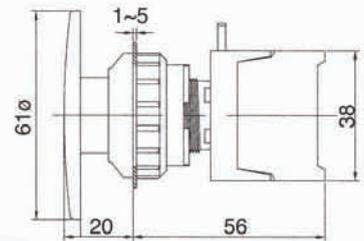


**XL30-1/O XL30-1O/C 30 ϕ XL型凸頭按鈕
XL30-1/C**




XLEB30-1/C Latching STOP


30 ϕ XLEB型緊急按鈕

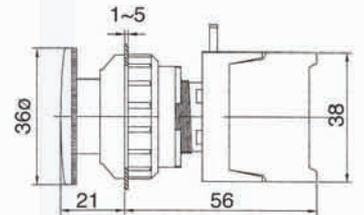


**PFL30-1O/C Push ON-Push OFF
30 ϕ 維持型平頭按鈕**



**XLEB30-1O/C Latching STOP (1A1B接點)
30 ϕ XLEB型緊急按鈕**

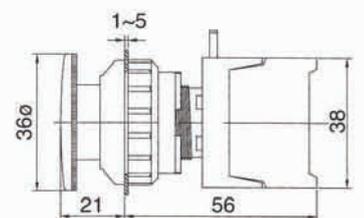


**EPFL30-1O/C Push ON-Push OFF
30 ϕ 維持型大頭按鈕**




ILLUMINATED PUSH BUTTON 30 ϕ ,IP65


LXB30-1/O 30 ϕ LXB型照光平頭按鈕
LXB30-1/C

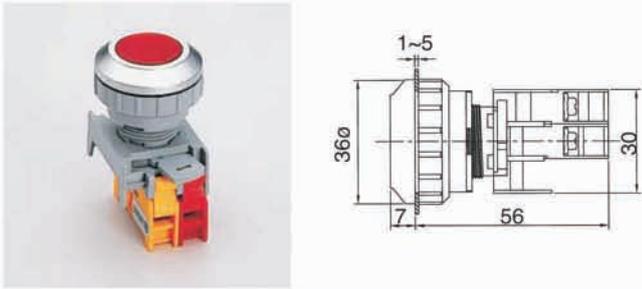


LXE30-1/O 30 ϕ LXE型照光大頭按鈕
LXE30-1/C

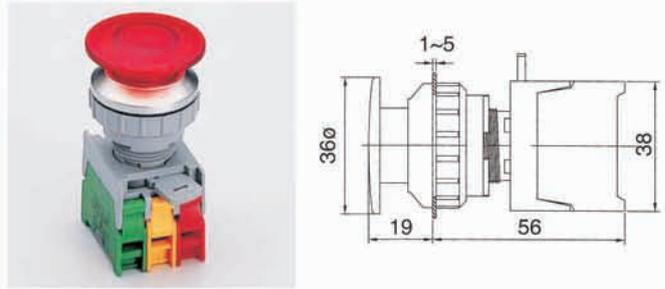


LXB30-1O/C 30 ϕ LXB型照光平頭按鈕
(1A1B接點)

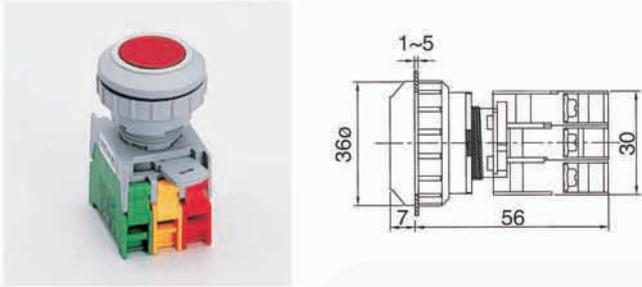


LXE30-1O/C 30 ϕ LXE型照光大頭按鈕
(1A1B接點)

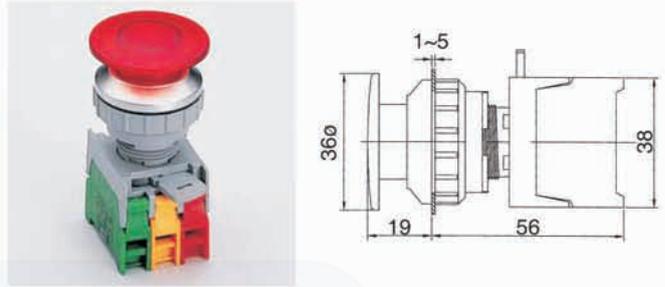


LXL30-1/O LXL30-1O/C
LXL30-1/C 30 ϕ LXL型照光凸頭按鈕

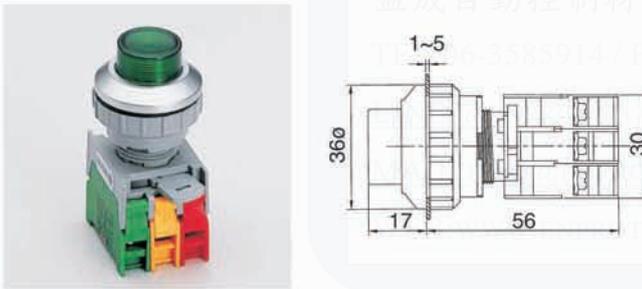


BLXE30-1/O BLXE30-1O/C
BLXE30-1/C 30 ϕ BLXE型照光特大頭按鈕

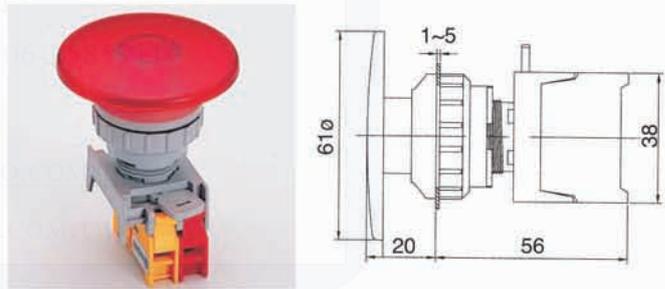


PFL30-1O/C Push ON-Push OFF
30 ϕ 維持型照光平頭按鈕

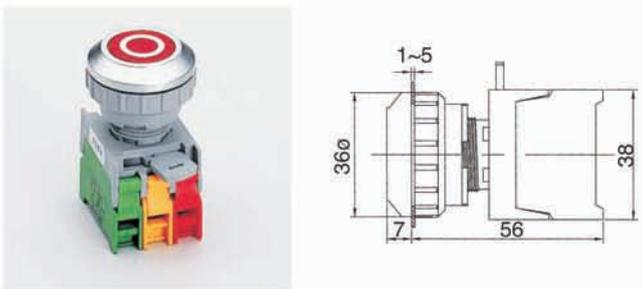


SS30-1/O 0-1 30 ϕ SS型2段短柄電鍍環選擇
SS30-1/C 1-0

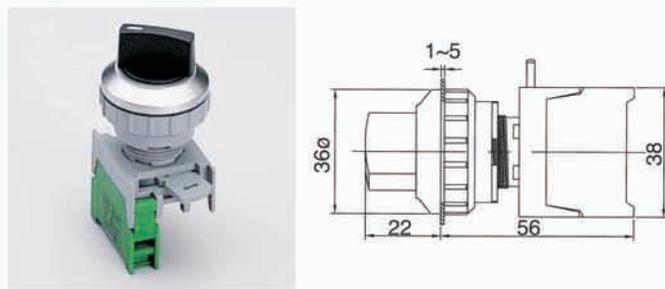

EPFL30-1O/C Push ON-Push OFF
30 ϕ 維持型照光大頭按鈕

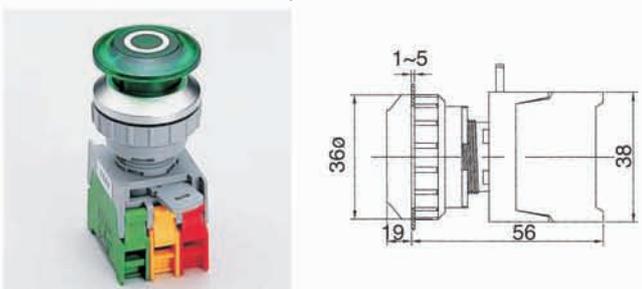


SS30-1O/C 1-2 30 ϕ SS型2段短柄電鍍環選擇
(1A1B接點)

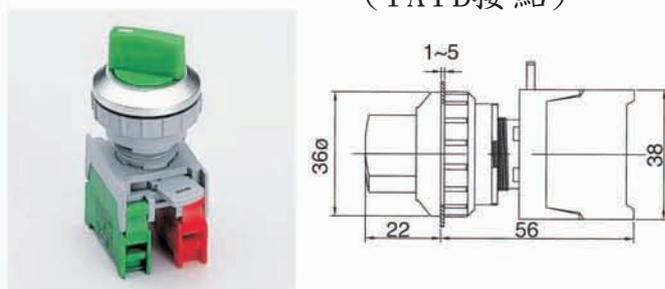


SELECTOR SWITCHES,KEY
SELECTOR SWITCHES 30 ϕ ,IP65


SS30-2/O 1-0-2
30 ϕ SS型3段短柄電鍍環選擇

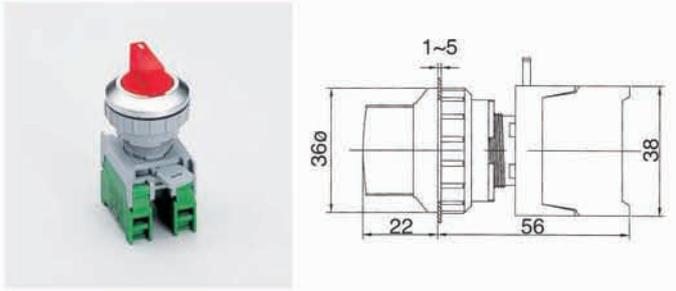


SR30-2/O, 1-0-2 (左右復歸)
SR30A-2/O, 1-0-2 (左復歸右維持)
30 ϕ SR型3段短柄電鍍環復歸選擇

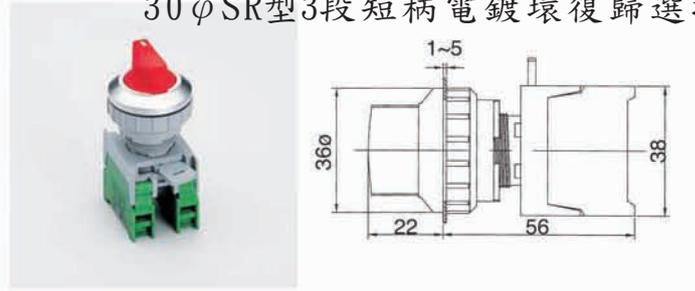


LSS30-1/O, 0-1
LSS30-1/C, 1-0
30 ϕ LSS型2段長柄電鍍環選擇

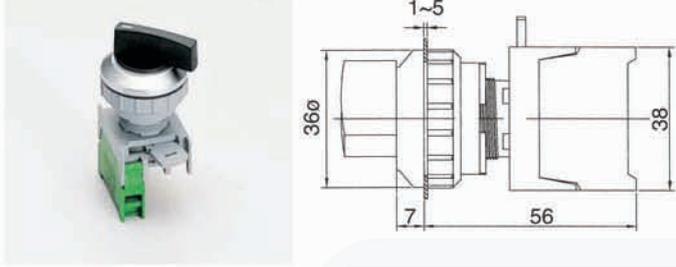


LSR30-1/O, 0-1
LSR30-1/C, 1-0
30 ϕ LSR型2段長柄電鍍環復歸選擇

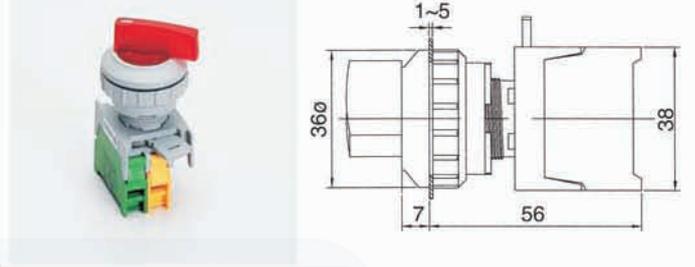


LSS30-10/C, 1-2 (1A1B接點)
30 ϕ LSS型2段長柄電鍍環選擇

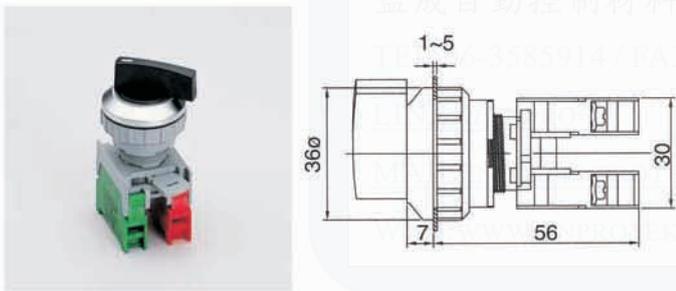


LSR30-10/C, 1-2 (1A1B接點)
30 ϕ LSR型2段長柄電鍍環復歸選擇

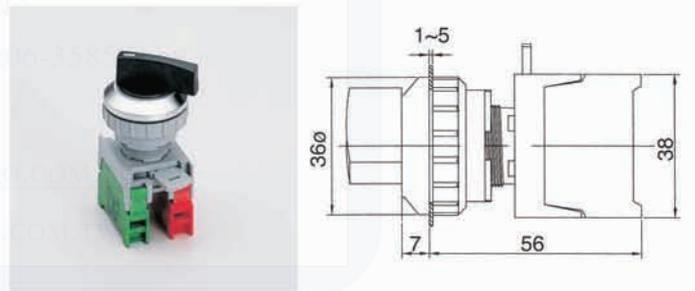


LSS30-2/O, 1-0-2
30 ϕ LSS型3段長柄電鍍環選擇

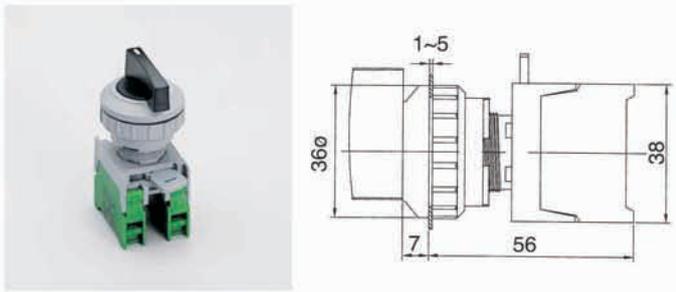


LSR30-2/O, 1-0-2 (左右復歸)
LSR30-2/O, 1-0-2 (左復歸右維持)
30 ϕ LSR型3段長柄電鍍環復歸選擇

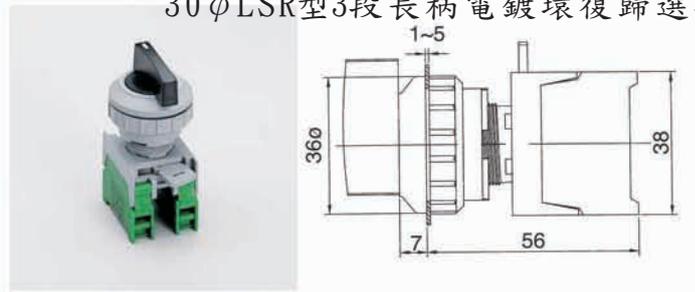

SR30-1/O, 0-1, SR30-10/C 1-2
SR30-1/C, 1-0
30 ϕ SR型2段短柄電鍍環復歸選擇

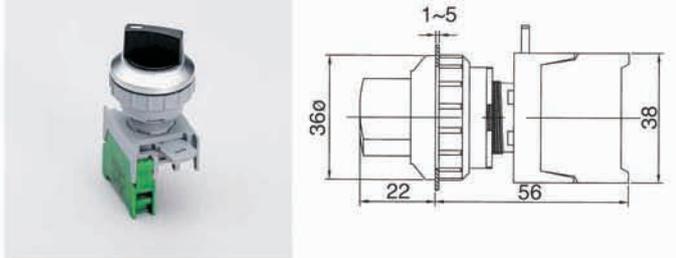


KS30-1/O 0-1
KS30-1/C 1-0
30 ϕ 2段電鍍環兩邊可抽鑰匙

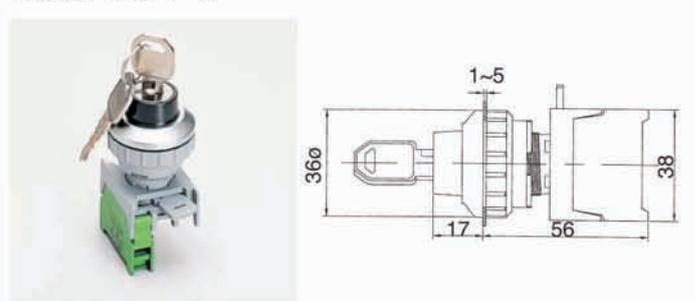


ILLUMINATED SELECTOR SWITCHES
KEY SELECTOR SWITCHES 30φ, IP65




KS30-10/C, 1-2 30φ 2段電鍍環兩邊可抽鑰匙
KSN30-10/C, 1-2 30φ 2段電鍍環單抽鑰匙
(1A1B接點)

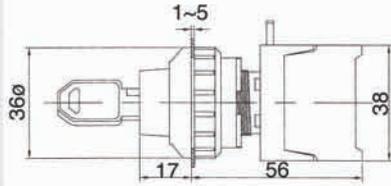


KSR30A-2/O, 1→0-2 (左復歸右維持)
30φ 3段電鍍環復歸鑰匙

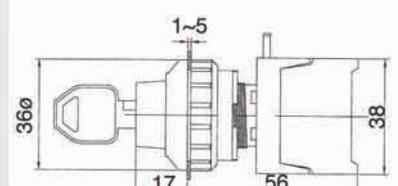


KS30-2/O, 1-0-2 30φ 3段電鍍環三邊可抽鑰匙
KSN30-2/O, 1-0-2 30φ 3段電鍍環單抽鑰匙

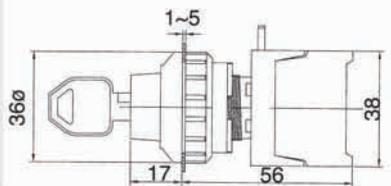


SL30-1/O, 0-1 30φ 2段短柄電鍍環照光選擇
SL30-1/C, 1-0

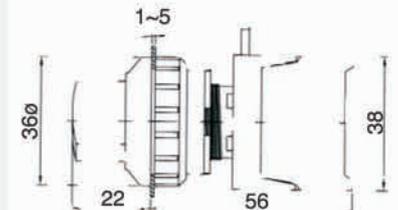


KSR30-1/O, 0←1 30φ 2段電鍍環復歸鑰匙
KSR30-1/C, 1←0 30φ 2段電鍍環復歸鑰匙

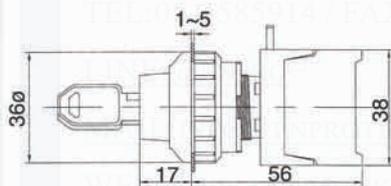


SL30-10/C, 1-2 (1A1B接點)
30φ 2段短柄電鍍環照光選擇

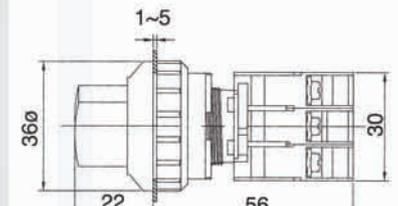


KSR30-10/C, 1←2 (1A1B接點)
30φ 2段電鍍環復歸鑰匙

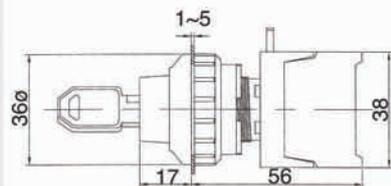


SL30-2/O, 1-0-2
30φ 3段短柄電鍍環照光選擇

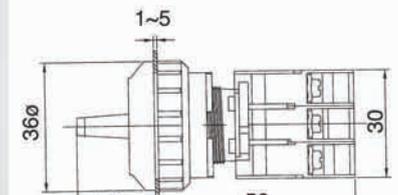

KSR30-2/O, 1→0←2 (左右復歸)
30φ 3段電鍍環復歸鑰匙

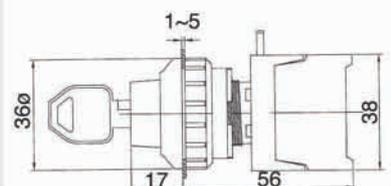


LSL30-1/O, 0-1 30φ 2段長柄電鍍環照光選擇
LSL30-1/C, 1-0

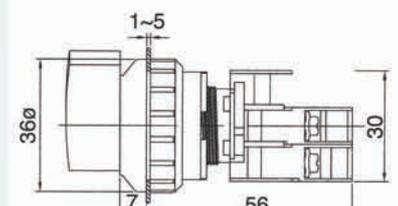




ILLUMINATED SELECTOR SWITCHES 30φ, IP65


LSL30-1O/C, 1-2 (1A1B接點)
30φ 2段長柄電鍍環照光選擇

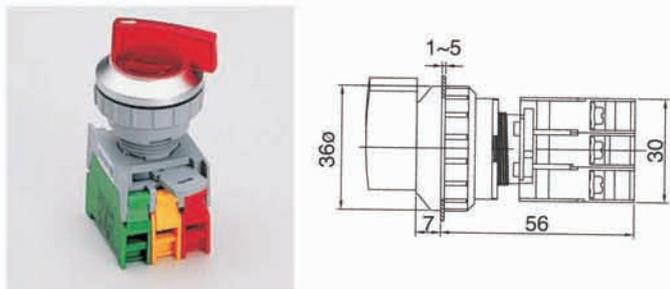


LSRL30-1O, 0←1
LSRL30-1/C, 1←0
30φ 2段長柄電鍍環照光復歸選擇

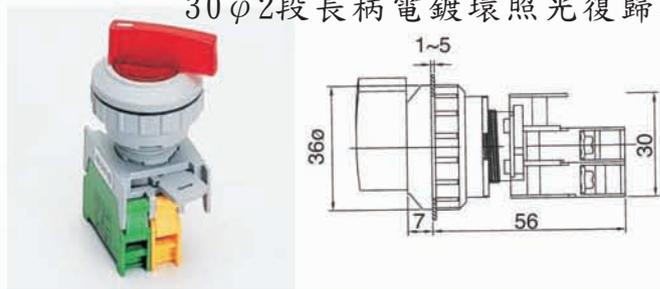

LSL30-2O, 1-0-2
30φ 3段長柄電鍍環照光選擇

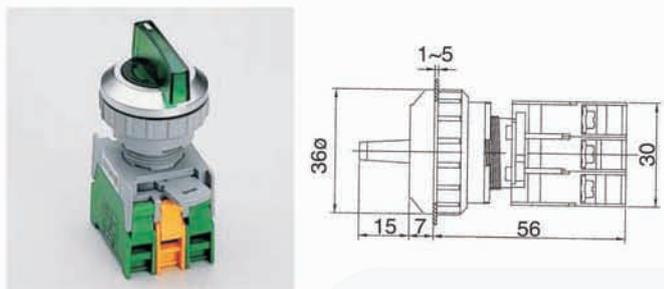


LSRL30-1O/C, 1←2 (1A1B接點)
30φ 2段長柄電鍍環照光復歸選擇

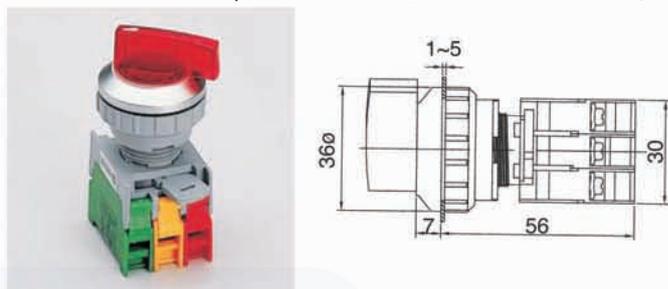


SRL30-1O, 0←1
SRL30-1/C, 1←0
30φ 2段短柄電鍍環照光復歸選擇




LSRL30-2O, 1→0←2 (左右復歸)
LSRL30A-2O, 1→0-2 (左復歸右維持)

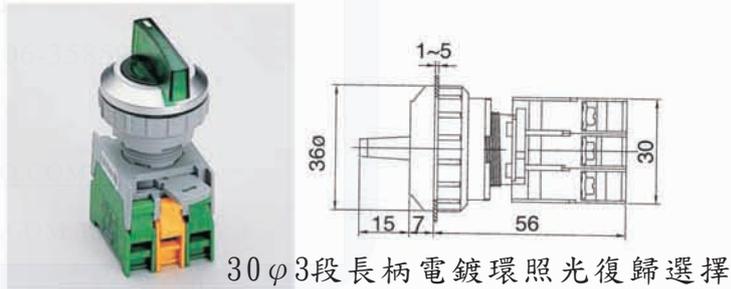


SRL30-1O/C, 1←2 (1A1B接點)
30φ 2段短柄電鍍環照光復歸選擇

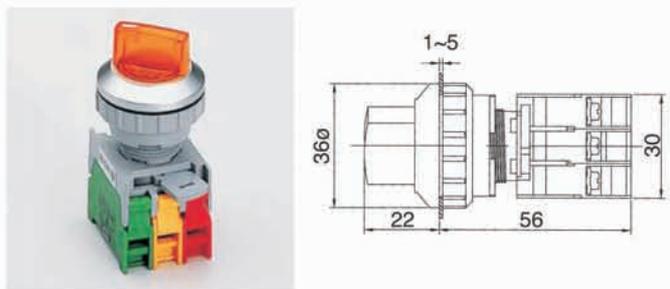


LS30-1O, 0-1, LS30-1O/C, 1-2
LS30-2O, 0-1 30φ 2段搖柄電鍍環選擇

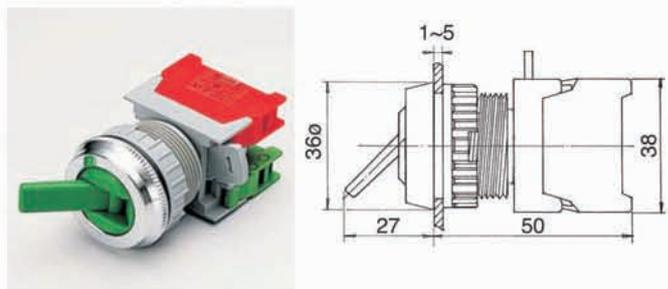

SRL30-2O, 1→0←2 (左右復歸)
SRL30A-2O, 1→0-2 (左復歸右維持)

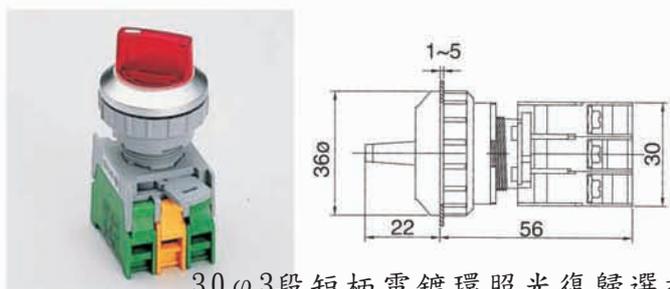


LUS30-2O, 1→0←2
LUS30-2/C, 1→0←2
30φ 3段搖柄電鍍環復歸選擇

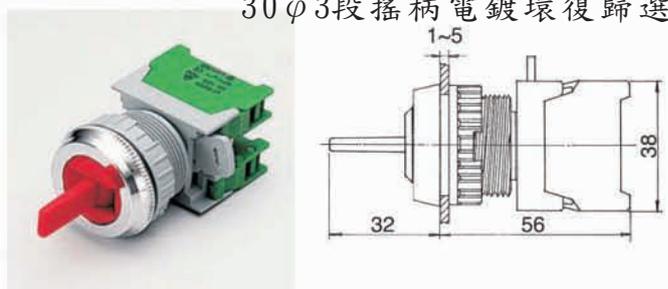


ILLUMINATED PUSH BUTTON SWITCHES
 PUSH BUTTON SWITCHES 30φ, IP65




PBF30-1/O PBF30-1/C 30φ PBF型電鍍環平頭按鈕

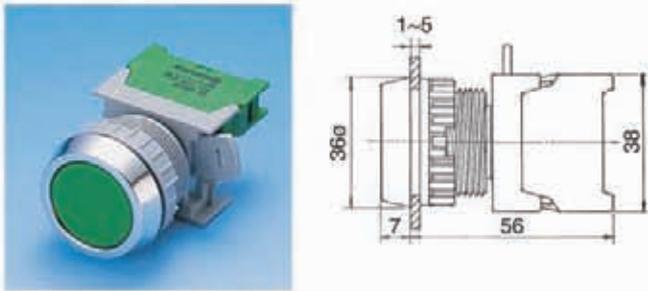


LEB30-1/C 30φ LEB型電鍍環緊急按鈕

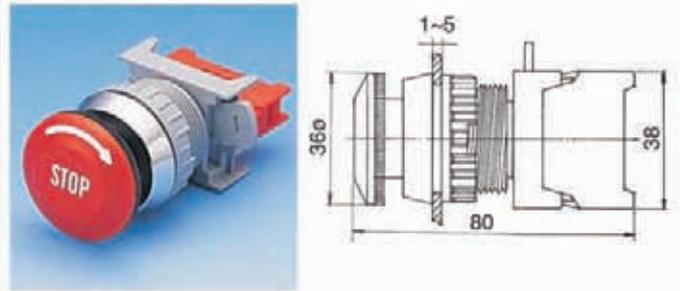


PBF30-1O/C 30φ PBF型電鍍環平頭按鈕
 (1A1B接點)

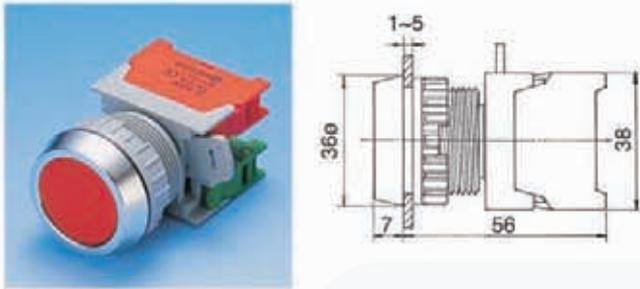


LEB30-1O/C 30φ LEB型電鍍環緊急按鈕
 (1A1B接點)

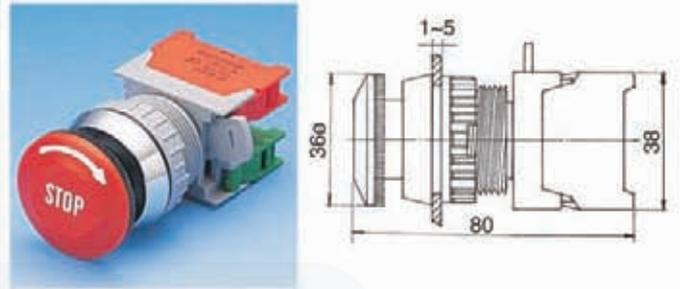


PBL30-1/O PBL30-1O/C
 PBL30-1/C 30φ PBL型電鍍環凸頭按鈕

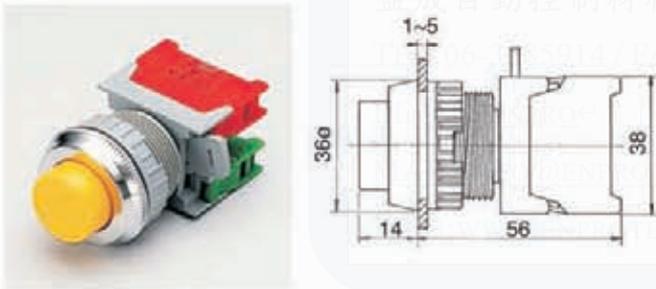


LBF30-1/O LBF30-1/C 30φ LBF型電鍍環照光平頭按鈕

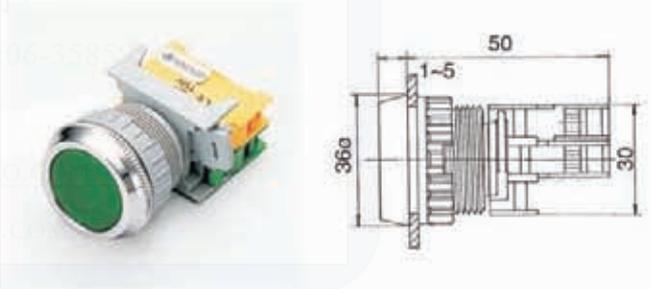


EB30-1/C EB30-1O/C 30φ EB型電鍍環大頭按鈕

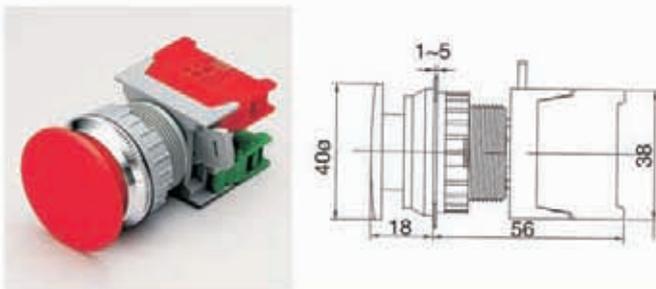


LBF30-1O/C (1A1B接點)
 30φ LBF型電鍍環照光平頭按鈕

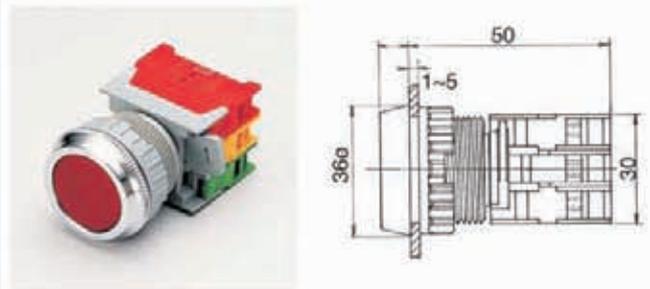

BEB30-1/C BEB30-1O/C 30φ BEB型電鍍環特大頭按鈕

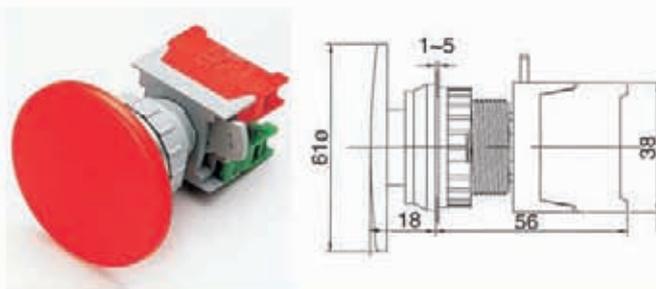


LBL30-1/O, LBL30-1O/C
 LBL30-1/C 30φ LBL型電鍍環照光凸頭按鈕

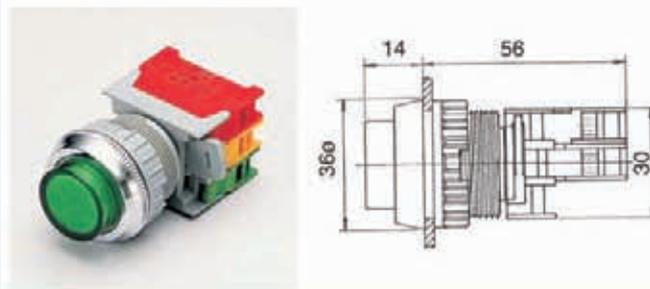


ILLUMINATED PUSH BUTTON
SELECTOR SWITCHES 30 ϕ ,IP65




EBL30-1/C
30 ϕ EBL型電鍍環照光大頭按鈕

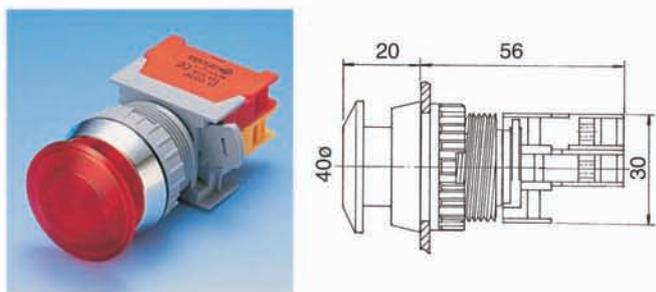


LCS30-2/O, 1-0-2
30 ϕ LCS型3段長柄電鍍環選擇

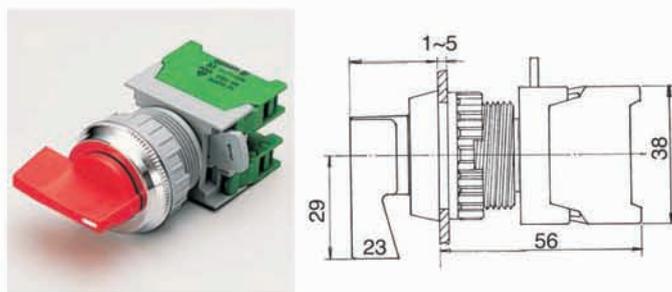


EBL30-10/C (1A1B接點)
30 ϕ EBL型電鍍環照光大頭按鈕

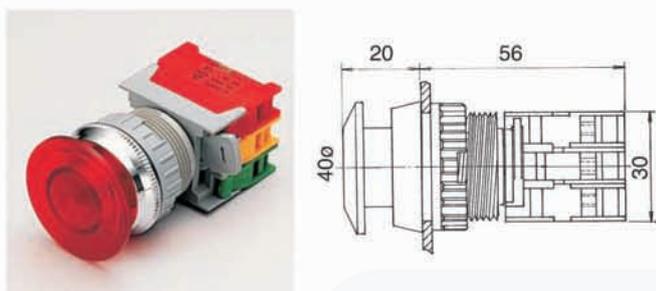


RS30-1/O, 0 \leftarrow 1, RS30-10/C, 1 \leftarrow 2
RS30-1/C, 1 \leftarrow 0
30 ϕ RS型2段短柄電鍍環復歸選擇

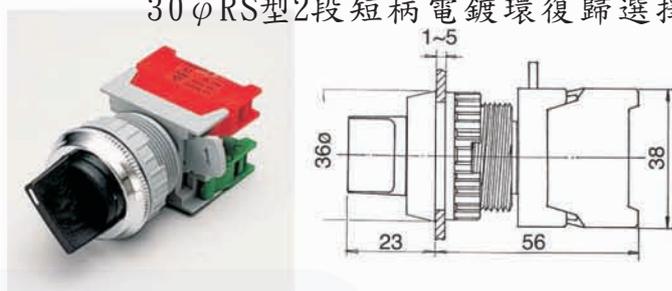


CS30-1/O, 0-1, CS30-10/C, 1-2
CS30-1/C, 1-0 30 ϕ CS型2段短柄電鍍環選擇

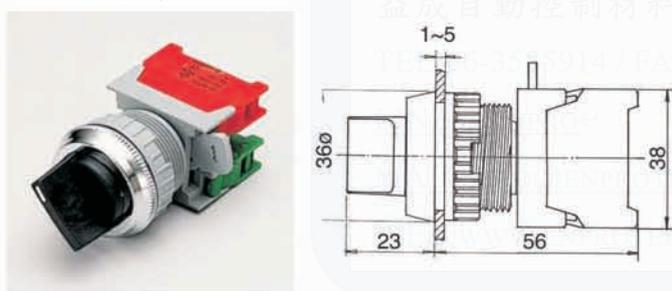


LRS30-1/O, 0 \leftarrow 1, LRS30-10/C, 1 \leftarrow 2
LRS30-1/C, 1 \leftarrow 0
30 ϕ LRS型2段長柄電鍍環復歸選擇

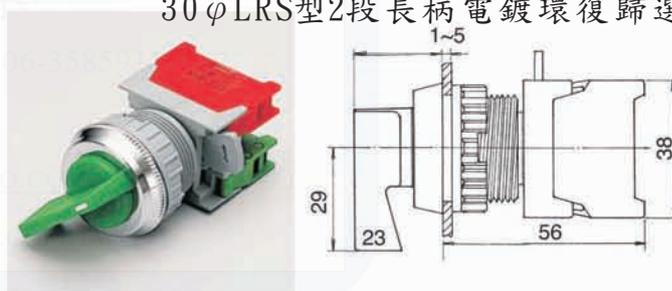


CS30-2/O, 1-0-2
30 ϕ CS型3段短柄電鍍環選擇

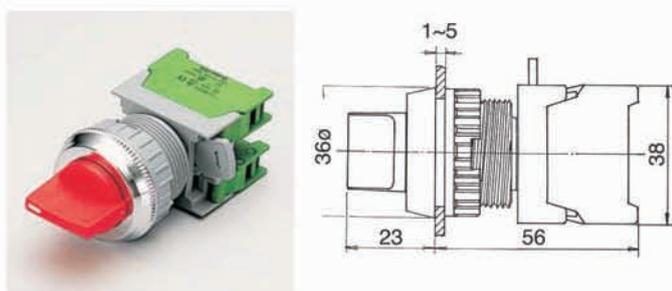


LRS30-2/O, 1 \rightarrow 0 \leftarrow 2 (左右復歸)
30 ϕ LRS型3段長柄電鍍環復歸選擇

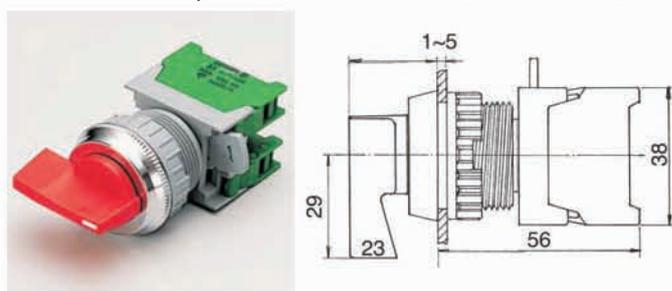

LCS30-1/O, 0-1, LCS30-10/C, 1-2
LCS30-1/C, 1-0
30 ϕ LCS型2段長柄電鍍環選擇

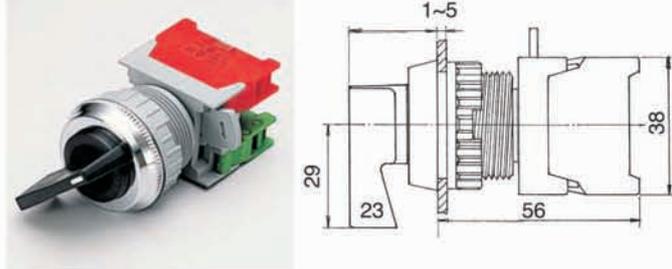

BEBL30-1/C
BEBL30-10/C
30 ϕ BEBL型電鍍環照光特大頭按鈕

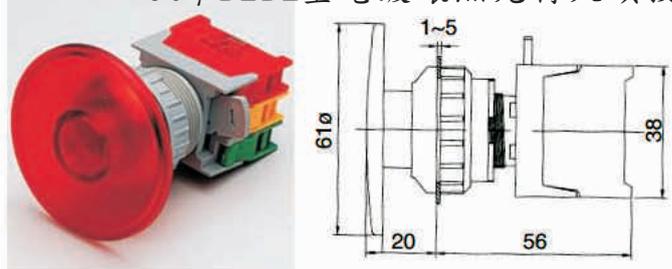

DOUBLE PUSH BUTTON 22 ϕ ,25 ϕ ,30 ϕ
 ILLUMINATED DOUBLE PUSH BUTTON





DPB-22N	22	1	10/C
Illuminated type	Mounting hole	Voltage	Type of contact
DPB-22N DPB-25N DPB-30N	22 : 22 ϕ 25 : 25 ϕ 30 : 30 ϕ	1:110V 2:220V 3:380V 4:440V 5:6V 6:12V 7:24V	O: N/O(a) C: N/C(b) O/C: N/O+N/C 1a+1b O: 1A接點 C: 1B接點 O/C: 1A1B接點
Push button			
DPB-22 DPB-25 DPB-30			
DPB	22		10/C


WATER PROOF COVER




DPB-22 22 ϕ 雙頭按鈕
 DPB-25 25 ϕ 雙頭按鈕

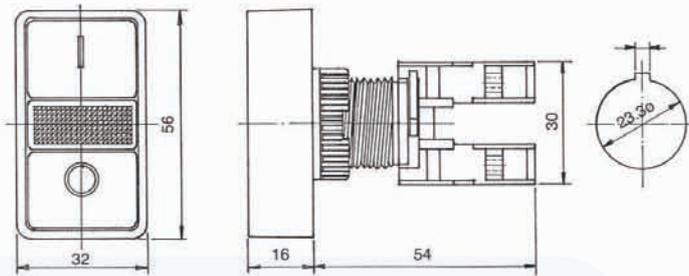


DPB-22N, Illuminated 22 ϕ 照光雙頭按鈕
 DPB-25N 25 ϕ 照光雙頭按鈕

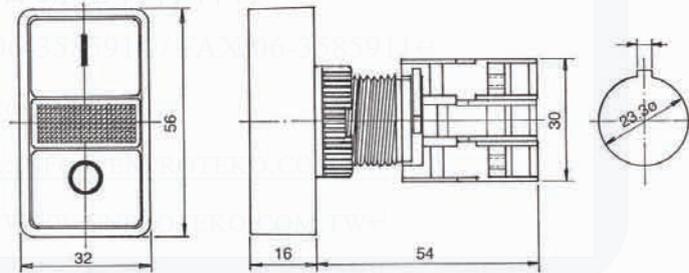


DPB-30N 30 ϕ 雙頭按鈕

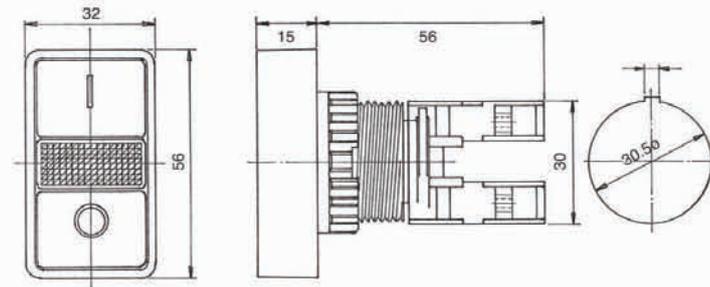

DPB-30N, Illuminated 30 ϕ 照光雙頭按鈕

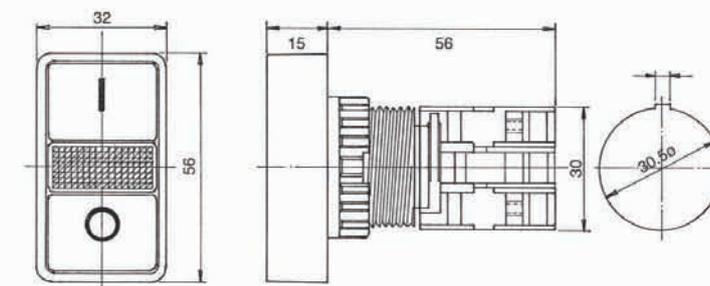


CONTROL STATIONS & MOULDED ENCLOSURES, IP65

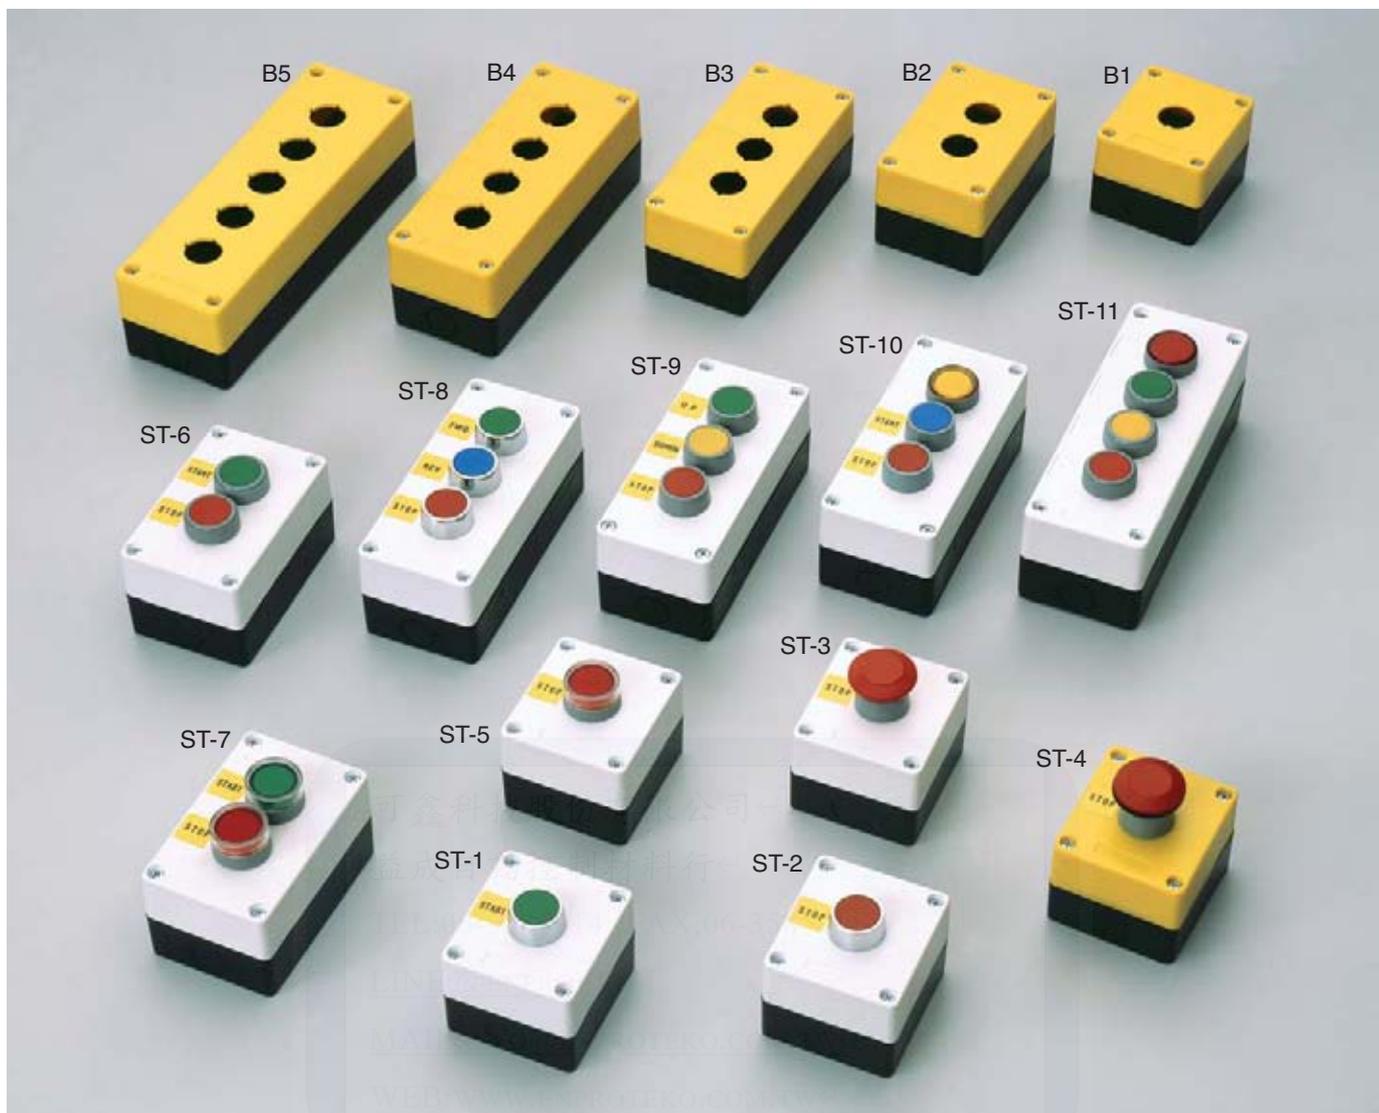


ST-1	1 pushbutton "START"	
ST-2	1 pushbutton "STOP"	
ST-3	1 mushroom Head pushbutton.	
ST-4	1 Latching mushroom head pushbutton "STOP"	
ST-5	1 illuminated push button with neon lamp "STOP"	
ST-6	2 pushbutton "START" "STOP"	

ST-7	2 illuminated pushbutton with neon lamp "START" "STOP"	
ST-8	3 pushbuttons "FORWARD" "REVERSE" "STOP"	
ST-9	3 pushbuttons "UP" "DOWN" "STOP"	
ST-10	1 red pilot light with neon lamp 2 pushbuttons "START" "STOP"	
ST-11	3 illuminated push button with neon lamp	




	A	B
1 Button	78	67
2 Button	111	89
3 Button	151	130
4 Button	185	150
5 Button	222	184

LEGEND PLATE

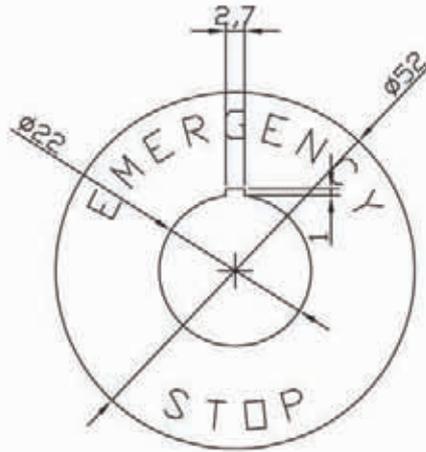


22φ 緊急按鈕標籤

LEGEND PLATE FRAME

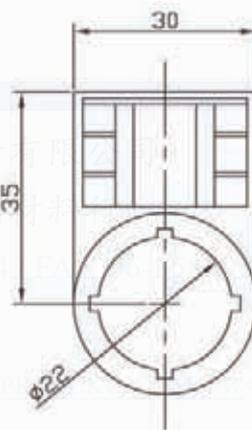

LEGEND PLATE SIZE

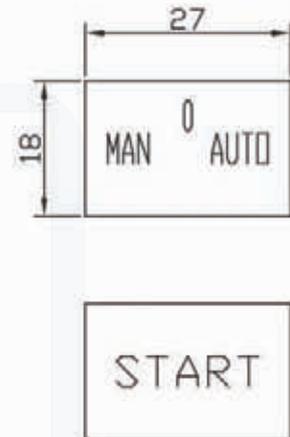

22φ 開關標示銘牌

LEGEND PLATES

UP 01	START 02	STOP 03	OPEN 04	CLOSE 05	ON 06	OFF 07	FWD 08	REV 09	HIGH 10	LOW 11
OFF ON 21	0 1 22	I II 23	STOP START 24	HIGH LOW 25	MAN AUTO 26	UP DOWN 27				
ON OFF ON 301	MAN OFF AUTO 302	HIGH OFF LOW 303	FOR OFF REV 304	1 0 2 305	UP OFF DOWN 306	1 0 II 307				

可鑫科技股份有限公司
 益成自動控制材料行
 TEL:06-3585914 / FAX:06-3585911
 LINE:@ENPRO
 MAIL:INFO@ENPROTEKO.COM.TW
 WEB:WWW.ENPROTEKO.COM.TW