


Pitch: 5.00mm(0.197inch)

- **Description :**
- Pitch : 5.00mm (0.197inch)





SPECIFICATIONS

負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	10A
電線線徑	Wire Size	Leitergrößen	36~12AWG
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
導電夾片	Contact	Kontakt	Phosphor bronze, Tin plated
彈片	Spring	Kable Schutz Einrichtung	Stainless Strip Steel
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C

TABLE

Item No.	A(mm)	A(inch)
MPC300-50002	10.0	0.394
MPC300-50003	15.0	0.591
MPC300-50004	20.0	0.787
MPC300-50005	25.0	0.984
MPC300-50006	30.0	1.181
MPC300-50007	35.0	1.378
MPC300-50008	40.0	1.575
MPC300-50009	45.0	1.772
MPC300-50010	50.0	1.969
MPC300-50011	55.0	2.165
MPC300-50012	60.0	2.362
MPC300-50013	65.0	2.559
MPC300-50014	70.0	2.756
MPC300-50015	75.0	2.953
MPC300-50016	80.0	3.150

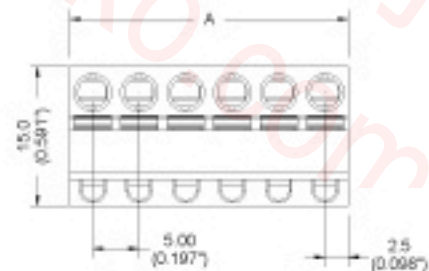

Pitch: 5.00mm(0.197inch)

- **Description :**
- Pitch : 5.00mm (0.197inch)



SPECIFICATIONS

負載電壓	Rated Voltage	Bemessungsspannung	AC 300V
負載電流	Rated Current	Bemessungsstrom	10A
電線線徑	Wire Size	Leitergrößen	36~12AWG
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)
導電夾片	Contact	Kontakt	Phosphor bronze, Tin plated
彈片	Spring	Kable Schutz Einrichtung	Stainless Strip Steel
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C

TABLE

Item No.	A(mm)	A(inch)
MPC301-50002	10.0	0.394
MPC301-50003	15.0	0.591
MPC301-50004	20.0	0.787
MPC301-50005	25.0	0.984
MPC301-50006	30.0	1.181
MPC301-50007	35.0	1.378
MPC301-50008	40.0	1.575
MPC301-50009	45.0	1.772
MPC301-50010	50.0	1.969
MPC301-50011	55.0	2.165
MPC301-50012	60.0	2.362
MPC301-50013	65.0	2.559
MPC301-50014	70.0	2.756
MPC301-50015	75.0	2.953
MPC301-50016	80.0	3.150

