

H5CN-2D/H5CN-3D/H5CN-A

STON	DIN SIZE 48×48mm DIGITAL SUPER TIMER	歐洲規格尺寸 48×48mm 數位限時繼電器
-------------	---	---------------------------------------



- 。 CE Approved .
- 。 STON relays inside.
- 。 MICROCHIP IC inside.
- 。 You can order 2 display or 3 display ,4 display.
- 。 CE 認證。
- 。 內部採用 STON 繼電器。
- 。 使用美國 MICROCHIP IC 。
- 。 三段切換時間，一瞬時一限時或兩限時可切換。
- 。 具有 2 位數 3 位數 4 位數顯示規格。
- 。 可訂製高週波或超聲波專用抗干擾型。

。 ORDERING INFORMATION 訂購說明

Ex H5CN	2	D3	9.99S				A110
Timer Type 型式	Display 顯示位數	Time range 時間範圍				Operating voltage 電壓範圍	
2 : 2 限時接點 Time out 2 form C	D2 : 2 Display	9.9S	99S	99M	99H	D12 : DC12V D24 : DC24V A110 : AC110V A220 : AC220V A380 : AC380V AD8240 : AC/DC80~240V	
3 : 1 瞬時 1 限時接點 Time out 1 form C & Instantaneous 1 form C	D3 : 3 Display	99.9S		9.99S			
A : 接點可調 Contact can be changeable	× : 4 Display	× : 99.99S / 99M99S / 99H99M					


。 SPECIFICATIONS & CHARACTERISTICS 規格 & 特性

Type 型式		H5CN-2	H5CN-3	H5CN-A
Rate operation voltage 額定電壓		DC12V ,AC24V, AC110V,AC220V,AC380V AC/DC 80~240V		
Operating voltage range 電壓使用範圍		80%~110%		
Rated frequency 額定頻率		AC: 50~60Hz		
Rated power consumption 額定功率消耗		About: 3VA		
Rated control capacity 輸出容量		DC: 5A 28VDC AC: 5A 250VAC P.F.=1		
Setting accuracy 設定誤差		± 10%		
Reset time 復歸時間		Less than 0.1S		
Life 壽命	Mechanical 機械	5000000		
	Electrical 電氣	100000		
Output arrangement 輸出方式		Time out 2 form C	Time out 1 form C & Instantaneous 1 form C	Time out 2 form C or Time out 1 form C & Instantaneous 1 form C
Max. temperature rise 最大溫升		55 deg.		
Ambient temperature 周圍溫度		-10 to +65 但不結冰結露 But no ice		
Ambient humidity 周圍溼度		Max. 85% RH		
Weight 重量		AC About 160g DC & AD about 135g		


H5CN-2D/H5CN-3D/H5CN-A

。 DIMENSIONS 規格尺寸

H5CN-□

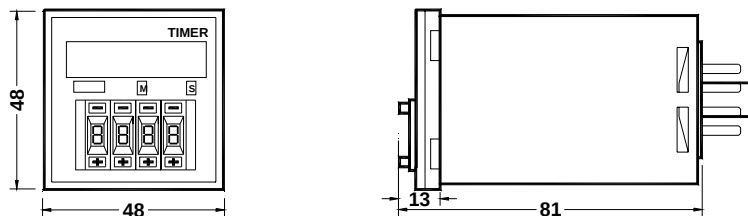


H5CN-□ + Y-48 Adapter

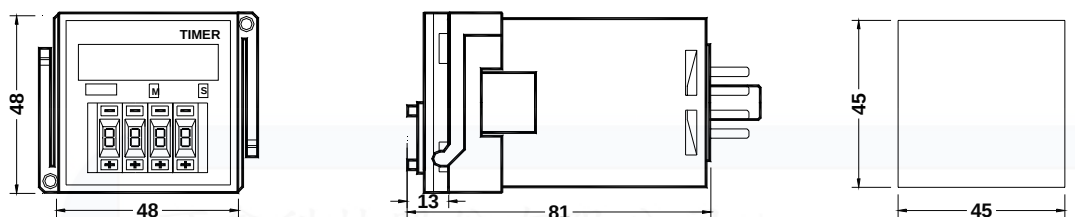


。 OPERATION 操作方式


H5CN-A MODE A

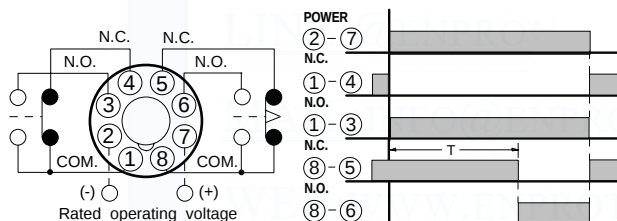


MODE B

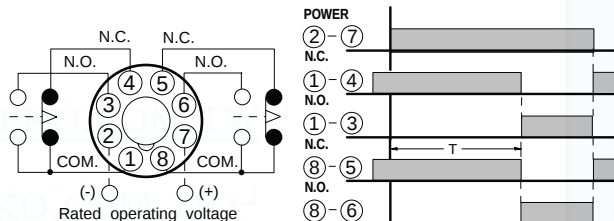

H5CN-2□

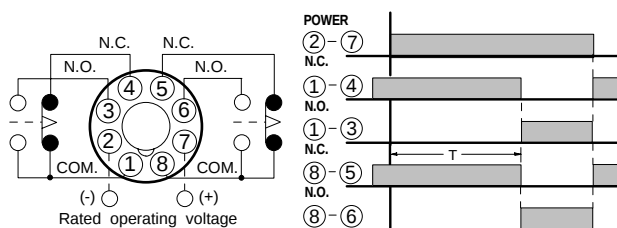

H5CN-3□

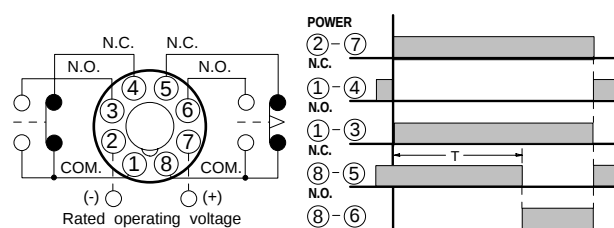

COM. : Common terminal
N.C. : Normally closed contact
N.O. : Normally open contact

● / ▲ / ● : Timed out contact
○ / ○ : Instantaneous contact

- NOTE:
- 。 Set time should be greater than min. operation time.
 - 。 Once power is cut off or timing operation is completed, power off time is needed to start the operation again.
 - 。 Do not change the set time during operation.
 - 。 When changing set time, cut off power and set the time