



Relay Socket


• PF-083A

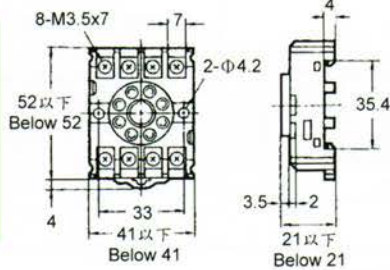


• PF-113A

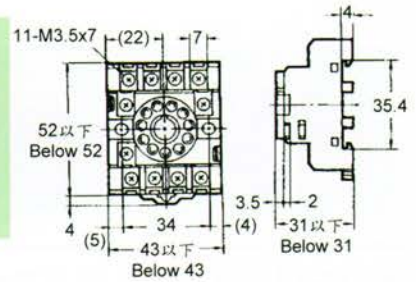


• PYF-08A

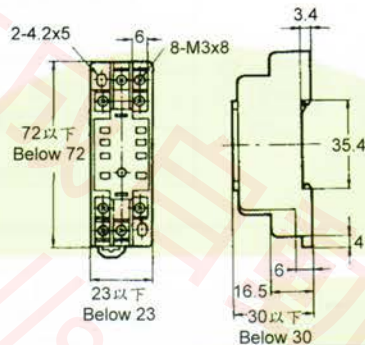



• PTF-08A

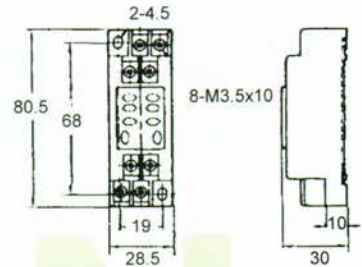


• PYF-14A

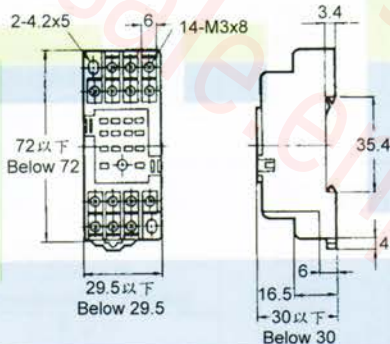


• PTF-14A

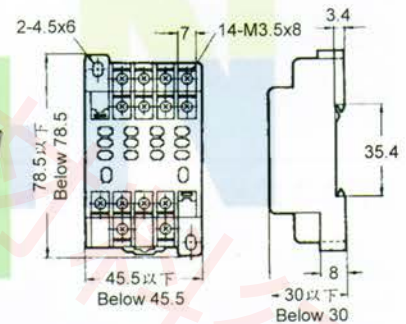


• TR-08A

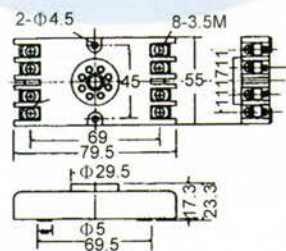

• US-08

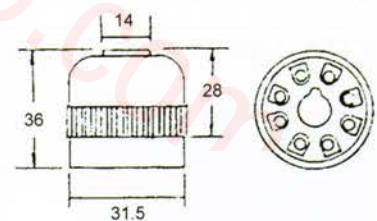

• PF-A 鋁軌Aluminum Rail (1M)

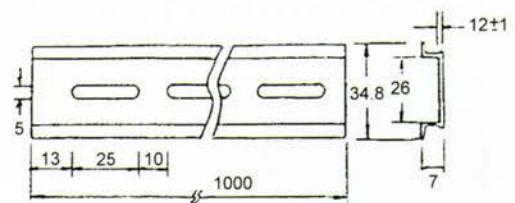

以上所有繼電器座皆為台灣製造



All relay sockets listed above are all made in Taiwan



Fuse Box


保險絲座

EFB-170A (GF-30) 、 EFB-170B (GF-20)

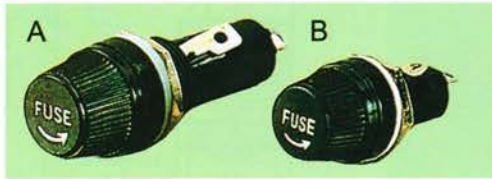



額定值 Rated Capacity	250V · 10A
絕緣阻抗 Insulation Resistance	DC500V 之下 · 100mΩ 100mΩ under DC500V
耐電壓 Dielectric Strength	AC1200V 一分鐘 AC1200V for 1 minute
長度 Length	A : 31mm B : 43mm

EFB-110NC 軌式附蓋 Rail Type with Cover (GF-30)





額定值 Rated Capacity	600V · 10A
絕緣阻抗 Insulation Resistance	DC500V 之下 · 100mΩ 100mΩ under DC500V
耐電壓 Dielectric Strength	AC1200V 一分鐘 AC1200V for 1 minute
耐熱溫度 Temperature Endurance	70℃

EFB-210N 軌式 Rail Type (GF-30)

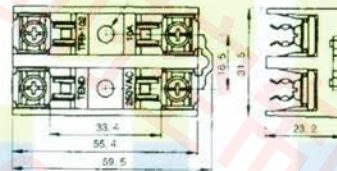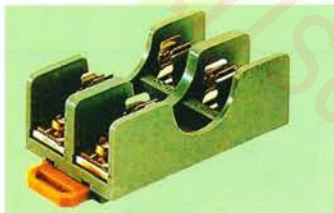



額定值 Rated Capacity	250V · 10A
絕緣阻抗 Insulation Resistance	DC500V 之下 · 100mΩ 100mΩ under DC500V
耐電壓 Dielectric Strength	AC1200V 一分鐘 AC1200V for 1 minute
耐熱溫度 Temperature Endurance	70℃

EFB-310NC 軌式附蓋 Rail Type with Cover (GF-30)

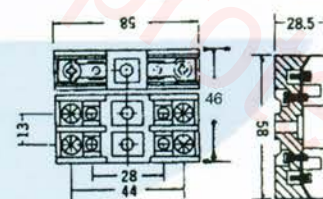
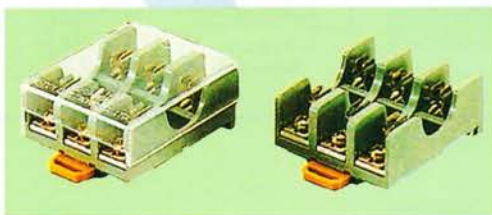


額定值 Rated Capacity	600V · 10A
絕緣阻抗 Insulation Resistance	DC500V 之下 · 100mΩ 100mΩ under DC500V
耐電壓 Dielectric Strength	AC1200V 一分鐘 AC1200V for 1 minute
耐熱溫度 Temperature Endurance	70℃

EFB-106 斷路霓虹指示燈 Neon Indicator for Broken Circuit (AC/ DC)

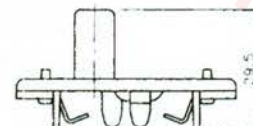

EFB-130N 軌式 Rail Type (F-50)

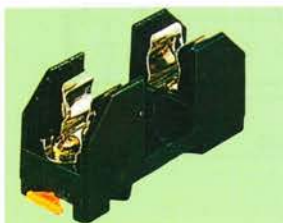



額定值 Rated Capacity	600V · 30A
絕緣阻抗 Insulation Resistance	DC500V 之下 · 100mΩ 100mΩ under DC500V
耐電壓 Dielectric Strength	AC1200V 一分鐘 AC1200V for 1 minute
耐熱溫度 Temperature Endurance	75℃



Fuse Box Connect Socket



EFB-330 (F-50)

額定值 Rated Capacity	600V · 30A
絕緣阻抗 Insulation Resistance	DC500V 之下 · 100mΩ 100mΩ under DC500V
耐電壓 Dielectric Strength	AC1200V 一分鐘 AC1200V for 1 minute
耐熱溫度 Temperature Endurance	75℃

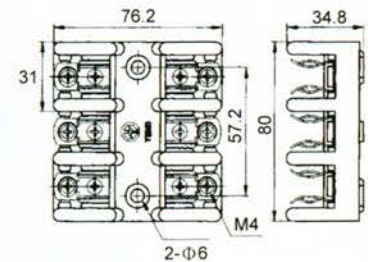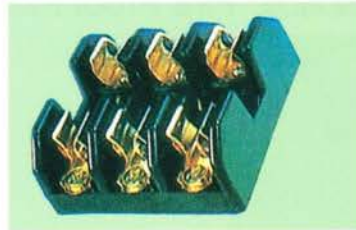

EFB-00 (F-00)


額定值 Rated Capacity	600V · 100A
絕緣阻抗 Insulation Resistance	DC500V 之下 · 100mΩ 100mΩ under DC500V
耐電壓 Dielectric Strength	AC1200V 一分鐘 AC1200V for 1 minute
耐熱溫度 Temperature Endurance	75℃

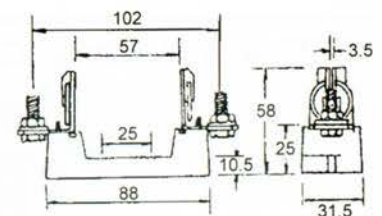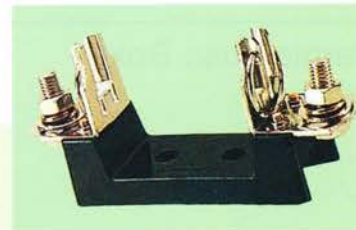

EFB-38-1 不帶燈 Without Lamp (F-38)

EFB-38-1L 帶燈 With Lamp (F-38)


額定值 Rated Capacity	600V · 32A
絕緣阻抗 Insulation Resistance	DC500V 之下 · 100mΩ 100mΩ under DC500V
耐電壓 Dielectric Strength	AC1200V 一分鐘 AC1200V for 1 minute
耐熱溫度 Temperature Endurance	75℃



EFB-38-2 不帶燈 Without Lamp (F-38)

EFB-38-2L 帶燈 With Lamp (F-38)


額定值 Rated Capacity	600V · 32A
絕緣阻抗 Insulation Resistance	DC500V 之下 · 100mΩ 100mΩ under DC500V
耐電壓 Dielectric Strength	AC1200V 一分鐘 AC1200V for 1 minute
耐熱溫度 Temperature Endurance	75℃

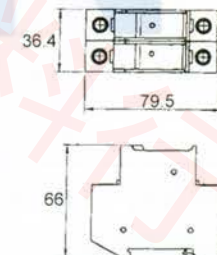

EFB-38-3 不帶燈 Without Lamp (F-38)


EFB-38-3L 帶燈 With Lamp (F-38)

額定值 Rated Capacity	600V · 32A
絕緣阻抗 Insulation Resistance	DC500V 之下 · 100mΩ 100mΩ under DC500V
耐電壓 Dielectric Strength	AC1200V 一分鐘 AC1200V for 1 minute
耐熱溫度 Temperature Endurance	75℃

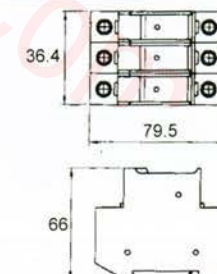

EFB-50 (F-50)

額定值 Rated Capacity	600V · 50A
絕緣阻抗 Insulation Resistance	DC500V 之下 · 100mΩ 100mΩ under DC500V
耐電壓 Dielectric Strength	AC1200V 一分鐘 AC1200V for 1 minute
耐熱溫度 Temperature Endurance	75℃


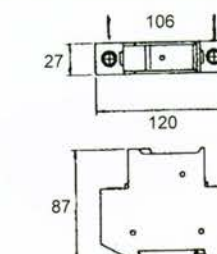


保險絲座、子母插座





Fuse Box Connect Socket



E-16N 防火塑料軌式保險絲座 Fire Proof Plastic Rail Type Fuse Box

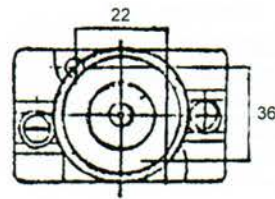



E-27 瓷質保險絲座 Ceramic Fuse Box






E-33 瓷質保險絲座 Ceramic Fuse Box



AC-4(N4) 子母插座(頭) Connect Socket(Head)



AC-Y4(Y6) 子母插座 Connect Socket

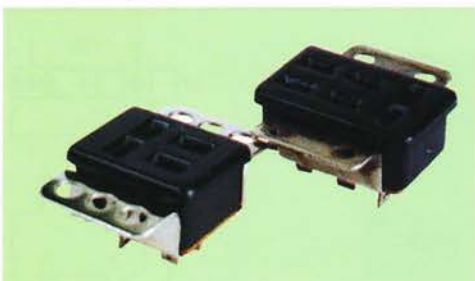



Fuse

保險絲

- F-161 (2~25A) E-16專用 For E-16
- F-162 (30A~40A)
- F-163 (50A)



規格 12 ϕ x 50m/m

- F-271 (2~25A) E-27專用 For E-27
- F-272 (30A~40A)
- F-273 (50A)



規格 21 ϕ x 50m/m

- F-331 (35~63A) E-33專用 For E-33
- F-332 (80A~100A)



規格 26 ϕ x 50m/m

- F-381 (1~25A) E-38專用 For E-38
- F-382 (30A~50A)



規格 10 ϕ x 38m/m

- F-501 (1~25A) EFB130N/ 330N專用
- F-502 (32A~50A) For EFB130N/ 330N



規格 14 ϕ x 51m/m

- F-581 (20A~50A)
- F-582 (63A~100A)



規格 22 ϕ x 58m/m

- GF-20 (0.5A~30A) 20mm
- GF-30 (0.5A~30A) 30mm




規格 5 ϕ x 20m/m 6 ϕ x 30m/m

- F-001 (6A~100A) EFB-00專用 For EFB-00
- F-002 (125A~160A)




規格 78.5x60x30m/m

- F-101 (63A~125A) "1"Type 刀型座專用
- F-102 (160A~250A) "1"Type For Blade Type




規格 135x66x52m/m

- F-201 (300A~400A) "2"Type 刀型座專用
- "2"Type For Blade Type

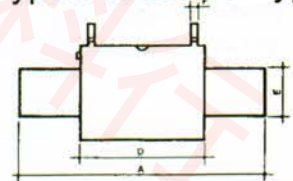

規格 150x74x60m/m

- F-301 (500A~630A) "3"Type 刀型座專用
- "3"Type For Blade Type

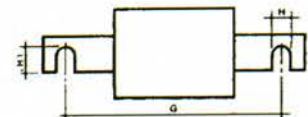

規格 150x89x75m/m

- F-401 (800A) "4"Type 刀型座專用
- "4"Type For Blade Type

size	A	B	C	D	E	F	F ₁	G	H	H ₁
00	78.5	60	30	54	15	2	6			
0	125	61	40	68	15	2	6	100	10	9
1	135	66	52	75	20	2.5	6	110	12	14
2	150	74	60	75	25	2.5	6	110	14	19.5
3	150	89	75	75	32	2.5	6	110	14	22.5
4	200	123	105	90	49	2.5	8	150	16	32

規格 200x123x105m/m