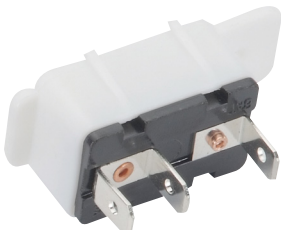
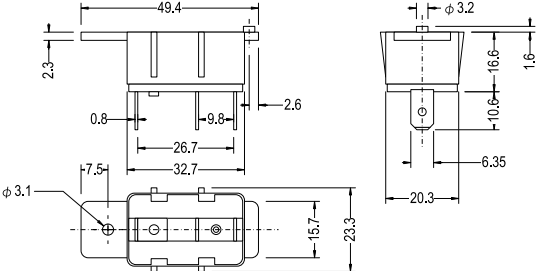

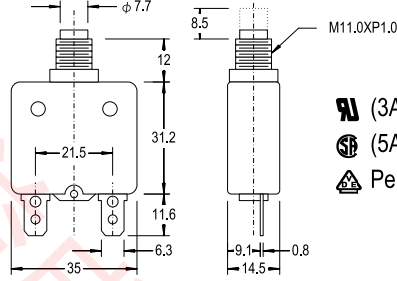




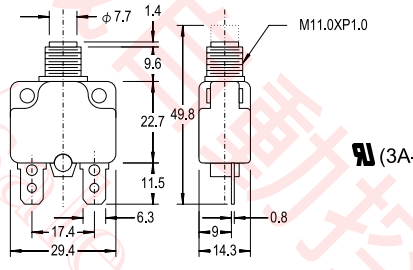


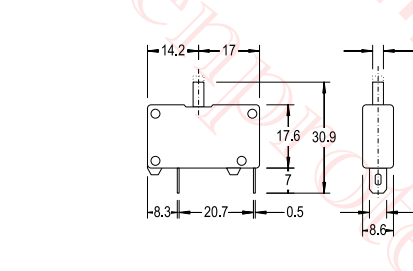

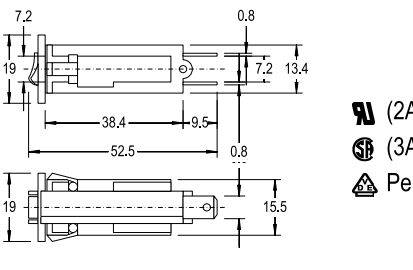




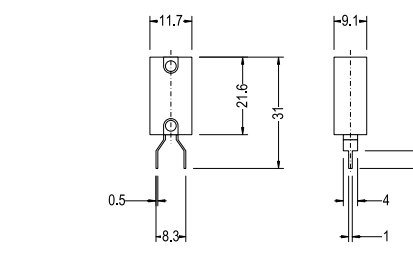


CIRCUIT BREAKER

<p>CB-600</p> 	 <p>Reset Method: Auto Reset</p>	<table border="1"> <thead> <tr> <th colspan="2">MAX. Internal Resistance</th> </tr> </thead> <tbody> <tr> <td>12A</td> <td>0.075 Ω</td> </tr> </tbody> </table>	MAX. Internal Resistance		12A	0.075 Ω	<table border="1"> <thead> <tr> <th colspan="2">Trip Time Curve 5 - 50 Amp</th> </tr> <tr> <th>Over Load</th> <th>Trip Time</th> </tr> </thead> <tbody> <tr> <td>100%</td> <td>No Trip</td> </tr> <tr> <td>150%</td> <td>Trip in 1 Hr.</td> </tr> <tr> <td>200%</td> <td>8 - 35 Sec.</td> </tr> <tr> <td>300%</td> <td>3 - 15 Sec.</td> </tr> <tr> <td>400%</td> <td>1 - 6 Sec.</td> </tr> <tr> <td>500%</td> <td>0.5 - 3 Sec.</td> </tr> </tbody> </table>	Trip Time Curve 5 - 50 Amp		Over Load	Trip Time	100%	No Trip	150%	Trip in 1 Hr.	200%	8 - 35 Sec.	300%	3 - 15 Sec.	400%	1 - 6 Sec.	500%	0.5 - 3 Sec.																																		
MAX. Internal Resistance																																																									
12A	0.075 Ω																																																								
Trip Time Curve 5 - 50 Amp																																																									
Over Load	Trip Time																																																								
100%	No Trip																																																								
150%	Trip in 1 Hr.																																																								
200%	8 - 35 Sec.																																																								
300%	3 - 15 Sec.																																																								
400%	1 - 6 Sec.																																																								
500%	0.5 - 3 Sec.																																																								
<p>CB-700</p> 	 <p>Reset Method: Manual Push Reset / Auto Reset</p> <p>  (3A-30A)  (5A, 10A, 15A, 20A)  Pending </p>	<table border="1"> <thead> <tr> <th colspan="2">MAX. Internal Resistance</th> </tr> </thead> <tbody> <tr> <td>3A-4A</td> <td>0.100 Ω</td> </tr> <tr> <td>5A-6A</td> <td>0.035 Ω</td> </tr> <tr> <td>7A-9A</td> <td>0.020 Ω</td> </tr> <tr> <td>10A-12A</td> <td>0.015 Ω</td> </tr> <tr> <td>13A-16A</td> <td>0.010 Ω</td> </tr> <tr> <td>17A-22A</td> <td>0.006 Ω</td> </tr> <tr> <td>23A-28A</td> <td>0.005 Ω</td> </tr> <tr> <td>29A-35A</td> <td>0.004 Ω</td> </tr> <tr> <td>36A-40A</td> <td>0.003 Ω</td> </tr> <tr> <td>41A-50A</td> <td>0.002 Ω</td> </tr> </tbody> </table>	MAX. Internal Resistance		3A-4A	0.100 Ω	5A-6A	0.035 Ω	7A-9A	0.020 Ω	10A-12A	0.015 Ω	13A-16A	0.010 Ω	17A-22A	0.006 Ω	23A-28A	0.005 Ω	29A-35A	0.004 Ω	36A-40A	0.003 Ω	41A-50A	0.002 Ω	<table border="1"> <thead> <tr> <th colspan="3">Trip Time Curve</th> </tr> <tr> <th>Over Load</th> <th colspan="2">Trip Time(Sec.)</th> </tr> <tr> <td></td> <td>3 - 4 Amp</td> <td>5 - 50 Amp</td> </tr> </thead> <tbody> <tr> <td>100%</td> <td colspan="2">No Trip</td> </tr> <tr> <td>150%</td> <td colspan="2">Trip in 1 Hr.</td> </tr> <tr> <td>200%</td> <td>10-55</td> <td>6.0-30</td> </tr> <tr> <td>400%</td> <td>3.0-14.0</td> <td>1.6-4.5</td> </tr> <tr> <td>600%</td> <td>1.4-7.0</td> <td>0.6-1.7</td> </tr> <tr> <td>800%</td> <td>0.75-4.3</td> <td>0.25-0.90</td> </tr> <tr> <td>1,000%</td> <td>0.50-3.4</td> <td>0.15-0.65</td> </tr> </tbody> </table>	Trip Time Curve			Over Load	Trip Time(Sec.)			3 - 4 Amp	5 - 50 Amp	100%	No Trip		150%	Trip in 1 Hr.		200%	10-55	6.0-30	400%	3.0-14.0	1.6-4.5	600%	1.4-7.0	0.6-1.7	800%	0.75-4.3	0.25-0.90	1,000%	0.50-3.4	0.15-0.65		
MAX. Internal Resistance																																																									
3A-4A	0.100 Ω																																																								
5A-6A	0.035 Ω																																																								
7A-9A	0.020 Ω																																																								
10A-12A	0.015 Ω																																																								
13A-16A	0.010 Ω																																																								
17A-22A	0.006 Ω																																																								
23A-28A	0.005 Ω																																																								
29A-35A	0.004 Ω																																																								
36A-40A	0.003 Ω																																																								
41A-50A	0.002 Ω																																																								
Trip Time Curve																																																									
Over Load	Trip Time(Sec.)																																																								
	3 - 4 Amp	5 - 50 Amp																																																							
100%	No Trip																																																								
150%	Trip in 1 Hr.																																																								
200%	10-55	6.0-30																																																							
400%	3.0-14.0	1.6-4.5																																																							
600%	1.4-7.0	0.6-1.7																																																							
800%	0.75-4.3	0.25-0.90																																																							
1,000%	0.50-3.4	0.15-0.65																																																							
<p>CB-700S</p> 	 <p>Reset Method: Manual Push Reset / Auto Reset</p> <p>  (3A-15A) </p>	<table border="1"> <thead> <tr> <th colspan="2">MAX. Internal Resistance</th> </tr> </thead> <tbody> <tr> <td>4A-5A</td> <td>0.120 Ω</td> </tr> <tr> <td>5A-6A</td> <td>0.100 Ω</td> </tr> <tr> <td>6A-7A</td> <td>0.075 Ω</td> </tr> <tr> <td>7A-8A</td> <td>0.035 Ω</td> </tr> <tr> <td>8A-9A</td> <td>0.020 Ω</td> </tr> <tr> <td>10A-11A</td> <td>0.015 Ω</td> </tr> <tr> <td>12A-13A</td> <td>0.010 Ω</td> </tr> <tr> <td>13A-14A</td> <td>0.010 Ω</td> </tr> <tr> <td>15A-16A</td> <td>0.008 Ω</td> </tr> <tr> <td>18A-20A</td> <td>0.007 Ω</td> </tr> </tbody> </table>	MAX. Internal Resistance		4A-5A	0.120 Ω	5A-6A	0.100 Ω	6A-7A	0.075 Ω	7A-8A	0.035 Ω	8A-9A	0.020 Ω	10A-11A	0.015 Ω	12A-13A	0.010 Ω	13A-14A	0.010 Ω	15A-16A	0.008 Ω	18A-20A	0.007 Ω	<table border="1"> <thead> <tr> <th colspan="2">Trip Time Curve 3 - 20 Amp</th> </tr> <tr> <th>Over Load</th> <th>Trip Time</th> </tr> </thead> <tbody> <tr> <td>100%</td> <td>No Trip</td> </tr> <tr> <td>150%</td> <td>Trip in 1 Hr.</td> </tr> <tr> <td>200%</td> <td>4 - 60 Sec.</td> </tr> <tr> <td>300%</td> <td>1.8 - 11.5 Sec.</td> </tr> <tr> <td>400%</td> <td>0.6 - 8.5 Sec.</td> </tr> <tr> <td>500%</td> <td>0.4 - 5.5 Sec.</td> </tr> <tr> <td>600%</td> <td>0.3 - 3.5 Sec.</td> </tr> </tbody> </table>	Trip Time Curve 3 - 20 Amp		Over Load	Trip Time	100%	No Trip	150%	Trip in 1 Hr.	200%	4 - 60 Sec.	300%	1.8 - 11.5 Sec.	400%	0.6 - 8.5 Sec.	500%	0.4 - 5.5 Sec.	600%	0.3 - 3.5 Sec.														
MAX. Internal Resistance																																																									
4A-5A	0.120 Ω																																																								
5A-6A	0.100 Ω																																																								
6A-7A	0.075 Ω																																																								
7A-8A	0.035 Ω																																																								
8A-9A	0.020 Ω																																																								
10A-11A	0.015 Ω																																																								
12A-13A	0.010 Ω																																																								
13A-14A	0.010 Ω																																																								
15A-16A	0.008 Ω																																																								
18A-20A	0.007 Ω																																																								
Trip Time Curve 3 - 20 Amp																																																									
Over Load	Trip Time																																																								
100%	No Trip																																																								
150%	Trip in 1 Hr.																																																								
200%	4 - 60 Sec.																																																								
300%	1.8 - 11.5 Sec.																																																								
400%	0.6 - 8.5 Sec.																																																								
500%	0.4 - 5.5 Sec.																																																								
600%	0.3 - 3.5 Sec.																																																								
<p>CB-770</p> 	 <p>Reset Method: Manual Push Reset / Auto Reset</p>	<table border="1"> <thead> <tr> <th colspan="2">MAX. Internal Resistance</th> </tr> </thead> <tbody> <tr> <td>1.5A-2A</td> <td>0.500 Ω</td> </tr> <tr> <td>2A-2.5A</td> <td>0.320 Ω</td> </tr> <tr> <td>2.5A-3A</td> <td>0.180 Ω</td> </tr> <tr> <td>3A-4A</td> <td>0.100 Ω</td> </tr> <tr> <td>5A-6A</td> <td>0.025 Ω</td> </tr> <tr> <td>7A-9A</td> <td>0.020 Ω</td> </tr> <tr> <td>10A-12A</td> <td>0.010 Ω</td> </tr> <tr> <td>13A-16A</td> <td>0.010 Ω</td> </tr> <tr> <td>17A-20A</td> <td>0.008 Ω</td> </tr> </tbody> </table>	MAX. Internal Resistance		1.5A-2A	0.500 Ω	2A-2.5A	0.320 Ω	2.5A-3A	0.180 Ω	3A-4A	0.100 Ω	5A-6A	0.025 Ω	7A-9A	0.020 Ω	10A-12A	0.010 Ω	13A-16A	0.010 Ω	17A-20A	0.008 Ω	<table border="1"> <thead> <tr> <th colspan="2">Trip Time Curve 1 - 20 Amp</th> </tr> <tr> <th>Over Load</th> <th>Trip Time</th> </tr> </thead> <tbody> <tr> <td>100%</td> <td>No Trip</td> </tr> <tr> <td>175%</td> <td>Trip in 1 Hr.</td> </tr> <tr> <td>200%</td> <td>4 - 60 Sec.</td> </tr> <tr> <td>300%</td> <td>0.8 - 15 Sec.</td> </tr> <tr> <td>400%</td> <td>0.4 - 5 Sec.</td> </tr> <tr> <td>500%</td> <td>0.2 - 2 Sec.</td> </tr> </tbody> </table>	Trip Time Curve 1 - 20 Amp		Over Load	Trip Time	100%	No Trip	175%	Trip in 1 Hr.	200%	4 - 60 Sec.	300%	0.8 - 15 Sec.	400%	0.4 - 5 Sec.	500%	0.2 - 2 Sec.																		
MAX. Internal Resistance																																																									
1.5A-2A	0.500 Ω																																																								
2A-2.5A	0.320 Ω																																																								
2.5A-3A	0.180 Ω																																																								
3A-4A	0.100 Ω																																																								
5A-6A	0.025 Ω																																																								
7A-9A	0.020 Ω																																																								
10A-12A	0.010 Ω																																																								
13A-16A	0.010 Ω																																																								
17A-20A	0.008 Ω																																																								
Trip Time Curve 1 - 20 Amp																																																									
Over Load	Trip Time																																																								
100%	No Trip																																																								
175%	Trip in 1 Hr.																																																								
200%	4 - 60 Sec.																																																								
300%	0.8 - 15 Sec.																																																								
400%	0.4 - 5 Sec.																																																								
500%	0.2 - 2 Sec.																																																								
<p>CB-800</p> 	 <p>Reset Method: Manual Push Reset / Auto Reset</p> <p>  (2A-18A)  (3A-15A)  Pending </p>	<table border="1"> <thead> <tr> <th colspan="2">MAX. Internal Resistance</th> </tr> </thead> <tbody> <tr> <td>1.5A-2A</td> <td>0.150 Ω</td> </tr> <tr> <td>2.5A-3A</td> <td>0.120 Ω</td> </tr> <tr> <td>3A-4A</td> <td>0.080 Ω</td> </tr> <tr> <td>4A-5A</td> <td>0.040 Ω</td> </tr> <tr> <td>5A-6A</td> <td>0.025 Ω</td> </tr> <tr> <td>6A-7A</td> <td>0.020 Ω</td> </tr> <tr> <td>8A-9A</td> <td>0.016 Ω</td> </tr> <tr> <td>10A-11A</td> <td>0.012 Ω</td> </tr> <tr> <td>12A-13A</td> <td>0.010 Ω</td> </tr> <tr> <td>14A-16A</td> <td>0.008 Ω</td> </tr> <tr> <td>18A-20A</td> <td>0.006 Ω</td> </tr> </tbody> </table>	MAX. Internal Resistance		1.5A-2A	0.150 Ω	2.5A-3A	0.120 Ω	3A-4A	0.080 Ω	4A-5A	0.040 Ω	5A-6A	0.025 Ω	6A-7A	0.020 Ω	8A-9A	0.016 Ω	10A-11A	0.012 Ω	12A-13A	0.010 Ω	14A-16A	0.008 Ω	18A-20A	0.006 Ω	<table border="1"> <thead> <tr> <th colspan="3">Trip Time Curve</th> </tr> <tr> <th>Over Load</th> <th colspan="2">Trip Time(Sec.)</th> </tr> <tr> <td></td> <td>1 - 2 Amp</td> <td>3 - 20 Amp</td> </tr> </thead> <tbody> <tr> <td>100%</td> <td colspan="2">No Trip</td> </tr> <tr> <td>135%</td> <td colspan="2">Trip in 1 Hr.</td> </tr> <tr> <td>200%</td> <td>4.5-28.0</td> <td>2.2-15.0</td> </tr> <tr> <td>400%</td> <td>1.0-6.5</td> <td>0.55-1.8</td> </tr> <tr> <td>600%</td> <td>0.4-4.0</td> <td>0.27-0.7</td> </tr> <tr> <td>800%</td> <td>N/A</td> <td>0.17-0.4</td> </tr> <tr> <td>1,000%</td> <td>N/A</td> <td>0.12-0.3</td> </tr> </tbody> </table>	Trip Time Curve			Over Load	Trip Time(Sec.)			1 - 2 Amp	3 - 20 Amp	100%	No Trip		135%	Trip in 1 Hr.		200%	4.5-28.0	2.2-15.0	400%	1.0-6.5	0.55-1.8	600%	0.4-4.0	0.27-0.7	800%	N/A	0.17-0.4	1,000%	N/A	0.12-0.3
MAX. Internal Resistance																																																									
1.5A-2A	0.150 Ω																																																								
2.5A-3A	0.120 Ω																																																								
3A-4A	0.080 Ω																																																								
4A-5A	0.040 Ω																																																								
5A-6A	0.025 Ω																																																								
6A-7A	0.020 Ω																																																								
8A-9A	0.016 Ω																																																								
10A-11A	0.012 Ω																																																								
12A-13A	0.010 Ω																																																								
14A-16A	0.008 Ω																																																								
18A-20A	0.006 Ω																																																								
Trip Time Curve																																																									
Over Load	Trip Time(Sec.)																																																								
	1 - 2 Amp	3 - 20 Amp																																																							
100%	No Trip																																																								
135%	Trip in 1 Hr.																																																								
200%	4.5-28.0	2.2-15.0																																																							
400%	1.0-6.5	0.55-1.8																																																							
600%	0.4-4.0	0.27-0.7																																																							
800%	N/A	0.17-0.4																																																							
1,000%	N/A	0.12-0.3																																																							
<p>CB-900</p> 	 <p>Reset Method: Auto Reset</p>	<table border="1"> <thead> <tr> <th colspan="2">MAX. Internal Resistance</th> </tr> </thead> <tbody> <tr> <td>0.8A-1.5A</td> <td>0.150 Ω</td> </tr> <tr> <td>1.5A-2A</td> <td>0.120 Ω</td> </tr> <tr> <td>2A-3A</td> <td>0.075 Ω</td> </tr> <tr> <td>3A-4A</td> <td>0.050 Ω</td> </tr> <tr> <td>4A-5A</td> <td>0.050 Ω</td> </tr> <tr> <td>5A-6A</td> <td>0.035 Ω</td> </tr> <tr> <td>6A-7A</td> <td>0.035 Ω</td> </tr> <tr> <td>7A-8A</td> <td>0.035 Ω</td> </tr> <tr> <td>8A-9A</td> <td>0.030 Ω</td> </tr> <tr> <td>9A-10A</td> <td>0.030 Ω</td> </tr> </tbody> </table>	MAX. Internal Resistance		0.8A-1.5A	0.150 Ω	1.5A-2A	0.120 Ω	2A-3A	0.075 Ω	3A-4A	0.050 Ω	4A-5A	0.050 Ω	5A-6A	0.035 Ω	6A-7A	0.035 Ω	7A-8A	0.035 Ω	8A-9A	0.030 Ω	9A-10A	0.030 Ω	<table border="1"> <thead> <tr> <th colspan="2">Trip Time Curve 0.8 - 10 Amp</th> </tr> <tr> <th>Over Load</th> <th>Trip Time</th> </tr> </thead> <tbody> <tr> <td>100%</td> <td>No Trip</td> </tr> <tr> <td>150%</td> <td>Trip in 1 Hr.</td> </tr> <tr> <td>200%</td> <td>2 - 50 Sec.</td> </tr> <tr> <td>300%</td> <td>0.5 - 5 Sec.</td> </tr> <tr> <td>400%</td> <td>0.3 - 1 Sec.</td> </tr> <tr> <td>500%</td> <td>0.2 - 0.7 Sec.</td> </tr> <tr> <td>600%</td> <td>0.1 - 0.5 Sec.</td> </tr> </tbody> </table>	Trip Time Curve 0.8 - 10 Amp		Over Load	Trip Time	100%	No Trip	150%	Trip in 1 Hr.	200%	2 - 50 Sec.	300%	0.5 - 5 Sec.	400%	0.3 - 1 Sec.	500%	0.2 - 0.7 Sec.	600%	0.1 - 0.5 Sec.														
MAX. Internal Resistance																																																									
0.8A-1.5A	0.150 Ω																																																								
1.5A-2A	0.120 Ω																																																								
2A-3A	0.075 Ω																																																								
3A-4A	0.050 Ω																																																								
4A-5A	0.050 Ω																																																								
5A-6A	0.035 Ω																																																								
6A-7A	0.035 Ω																																																								
7A-8A	0.035 Ω																																																								
8A-9A	0.030 Ω																																																								
9A-10A	0.030 Ω																																																								
Trip Time Curve 0.8 - 10 Amp																																																									
Over Load	Trip Time																																																								
100%	No Trip																																																								
150%	Trip in 1 Hr.																																																								
200%	2 - 50 Sec.																																																								
300%	0.5 - 5 Sec.																																																								
400%	0.3 - 1 Sec.																																																								
500%	0.2 - 0.7 Sec.																																																								
600%	0.1 - 0.5 Sec.																																																								