

# **AUSPICIOUS** CONTROL COMPONENTS



2010-A






**PILOT LAMP**




Lens type	Mounting	Voltage rating		Lens color	Bulb type			
PLR: Round PLS: Square PLF: Flat PLB: Big FPL: Flush type	22 φ	1	110V	With Transformer	R: Red G: Green Y: Yellow B: Blue W: White	25 φ		
	25 φ	2	220V			E-10	6.3V	1W
	30 φ	3	380V			E-10	24V	1W
		4	440V			E-10	30V	1W
		5	6V	Without Transformer		30 φ		
		6	18V			E-12	18V	2W
		7	24V			E-12	24V	2W
		8	30V			E-12	30V	2W

**DIMENSIONS**


**PLT-22**  
Transformer pilot lamp

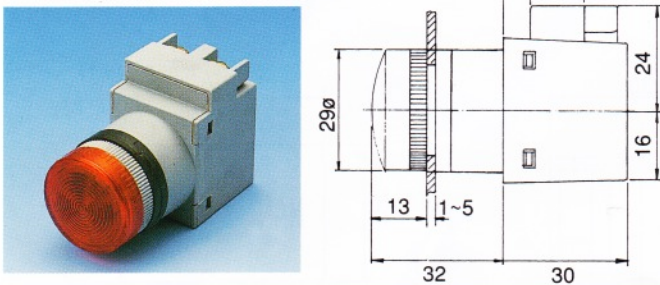


**PLR-30 Round lens, PLF-30 Flat round lens**

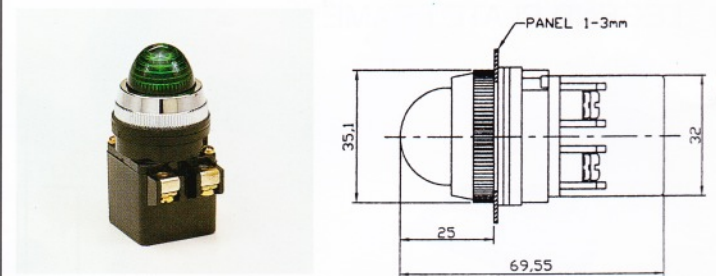


**PLR-25**

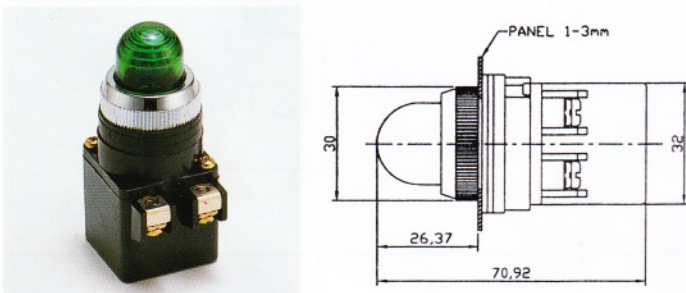


**PLB-30**

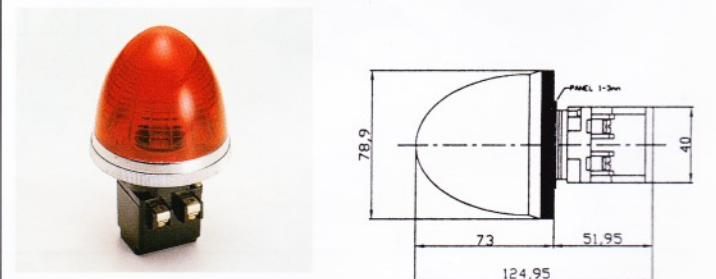


**PLS-25 25mm φ, PLS-30 30mm φ**

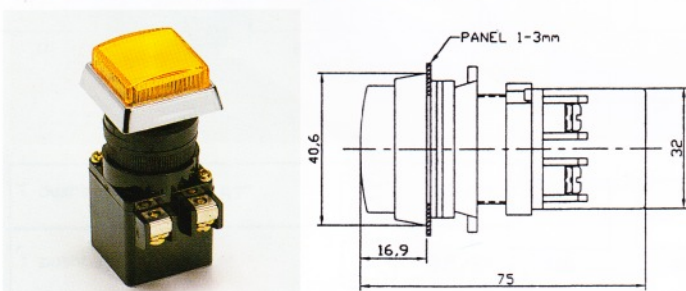


**FPL-30**

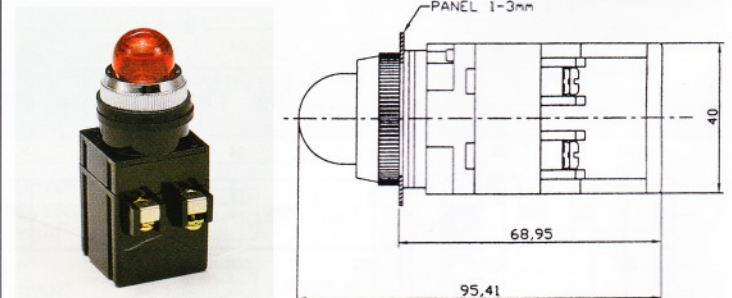

**PLF-25**

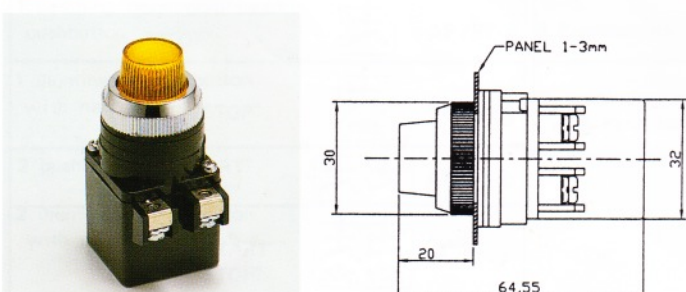


**FPLB-30**

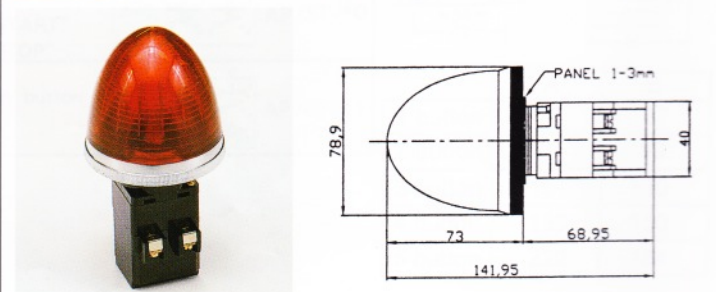




**PILOT LAMP**


L-22 22ø LED lamp




NPLRR-25A




NPLR-25A

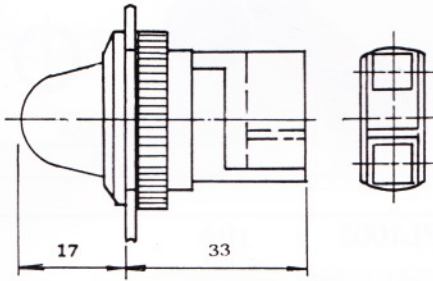


SNPLR-25




NPLF-25A




NPLR-30A

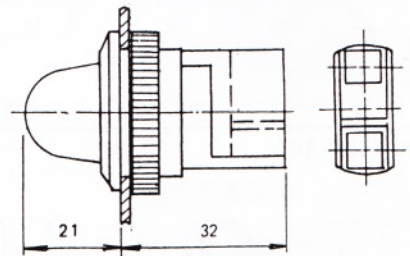


NPLR-25B




NPLF-30A



NPLF-25B



NPLS-30A

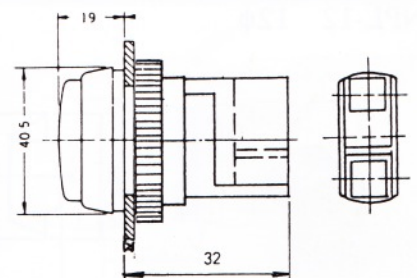




**PUSH BUTTON SWITCH**

PB	25	1	a	R
Type	Mounting hole	No. of contact	Type of contact blocks	Head color
PB: Flat head PBL: Long head PBR: Rain proof EPB: Mushroom head EPBL: Big mushroom head EPBLR: Big mushroom head with guard ring LEPB: Push Locked PBF: Long head w/guard ring	25: 25mm $\phi$  30: 30mm $\phi$	1 - 4	a: 1a (N/O)  b: 1b (N/C)	R: Red G: Green Y: Yellow B: Black


**SPECIFICATIONS**

AC 125V	AC 250V	AC 500V	DC 125V	DC 250V	DC 500V
10A	6A	3A	2A	1A	0.4A


**PB25-1a**

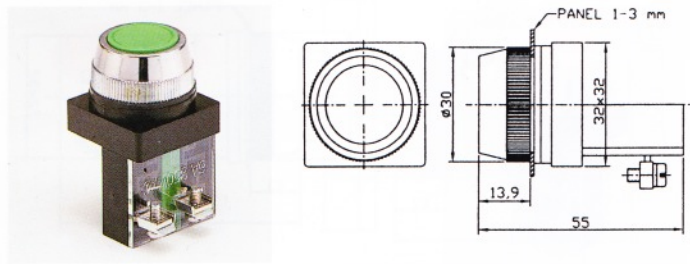


**PBL25-1a**

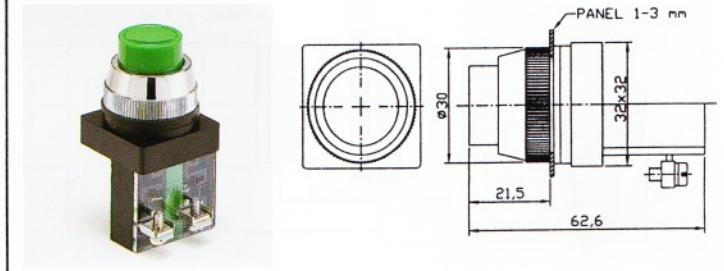


**PB25-1b**

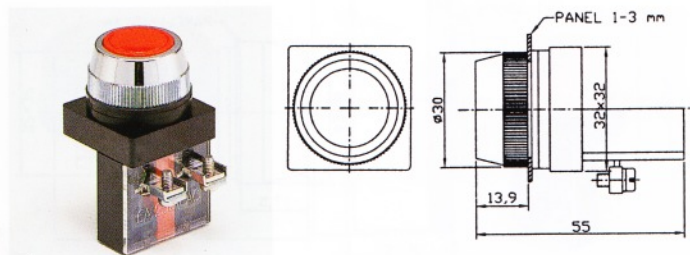


**PBL25-1b**

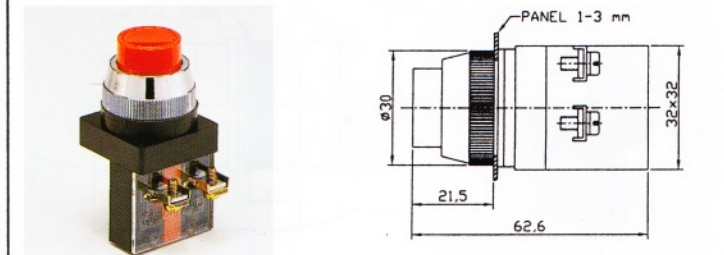


**PB2511**

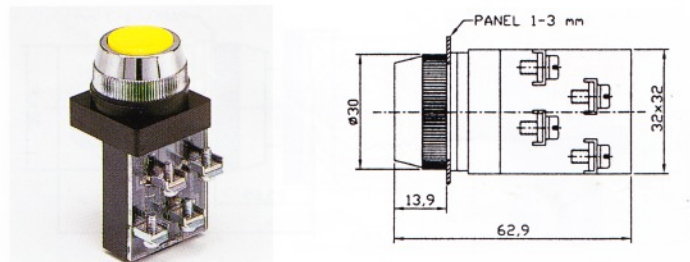


**PBL25-11**

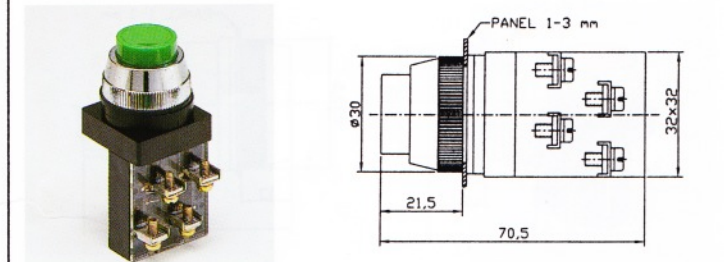

**PBR2511**

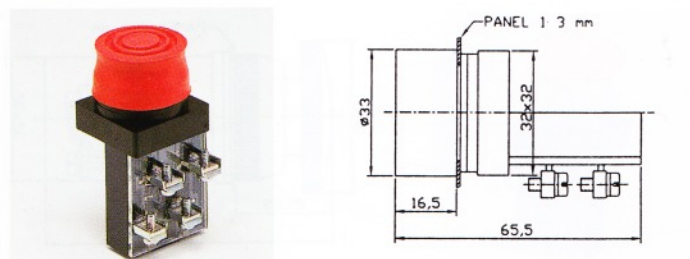


**EPB25-1b**

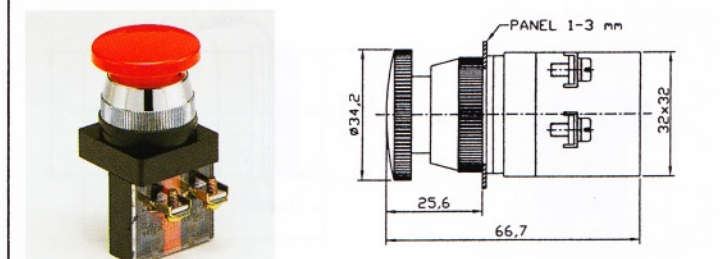




**PUSH BUTTON SWITCH**


**EPB2511**

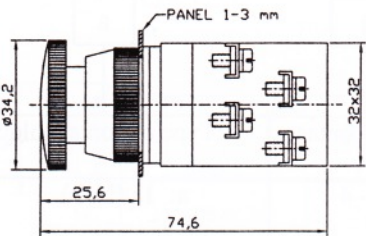


**PBL30-1a**




**LEPB25-1b**

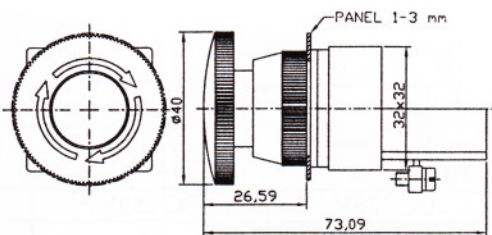


**PBL30-1b**




**LEPB2511**

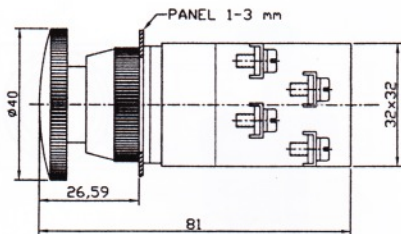


**PBL3011**




**PB30-1a**




**PBR-3011**




**PB30-1b**




**EPB30-1b**



**PB3011**




**EPB3011**

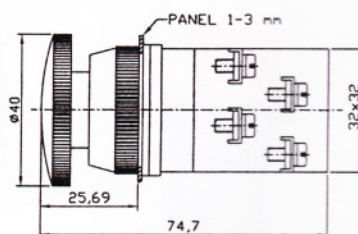




**PUSH BUTTON SWITCH**


**LEPB30-1b**

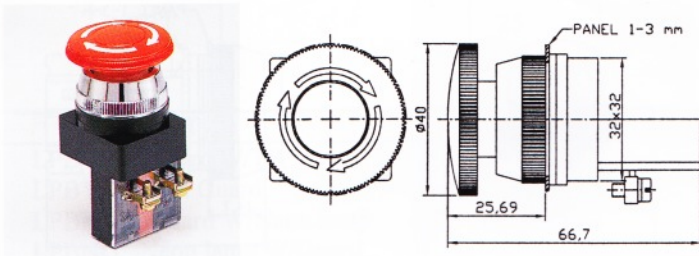


**PBK2211 22φ**

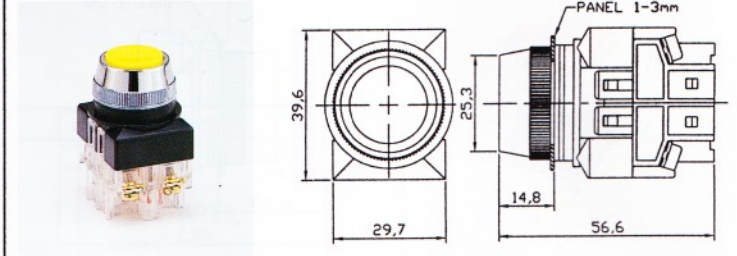


**LEPB3011**

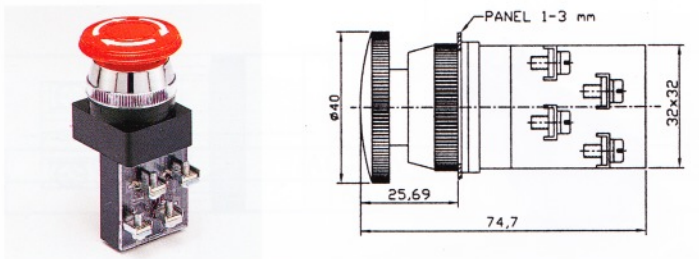


**EPBK 22-1b 22φ**

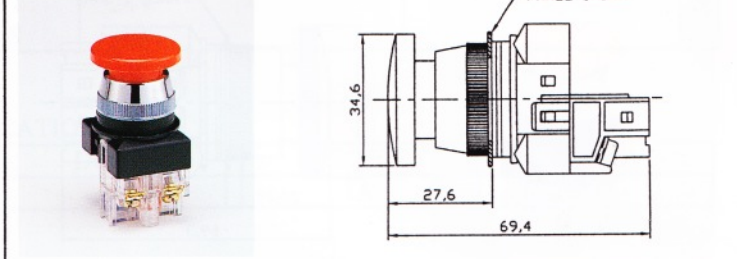


**EPBL3011**

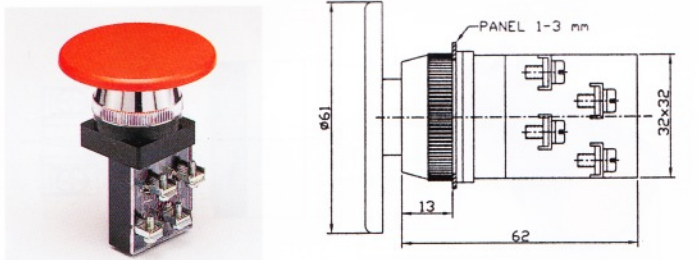


**EPBK 2211 22φ**

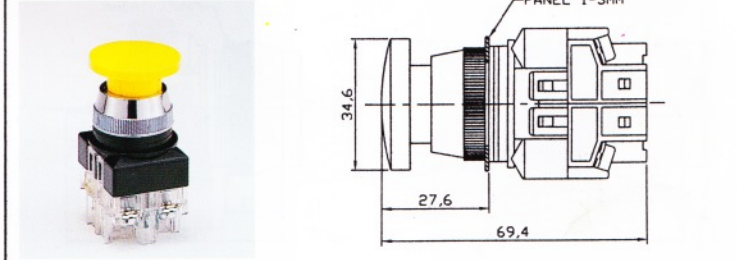


**EPBLR3011**

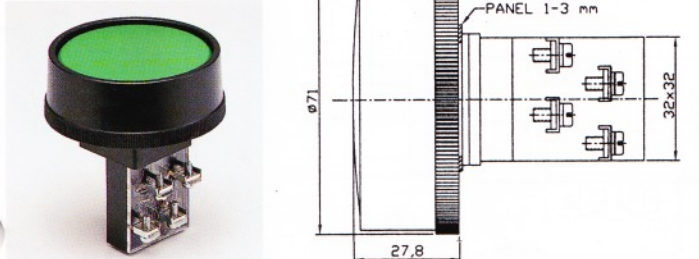


**PBK25-1a Mounting hole 25φ**

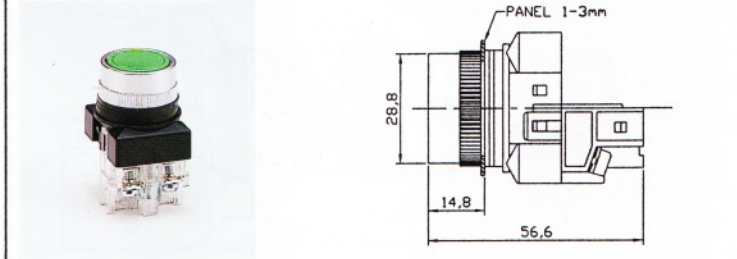


**PBK22-1a Mounting hole 22φ**

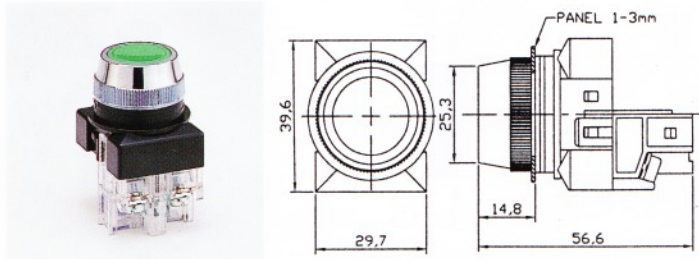


**PBK25-1b 25φ**

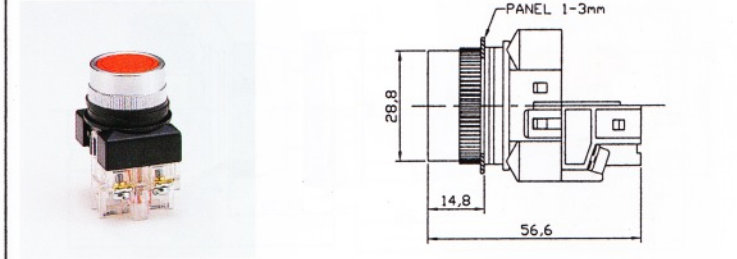

**PBK22-1b 22φ**

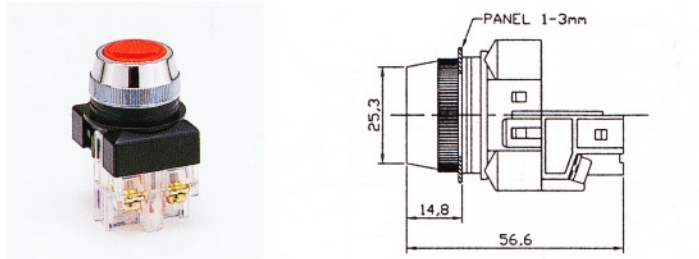


**PBK2511 25φ**

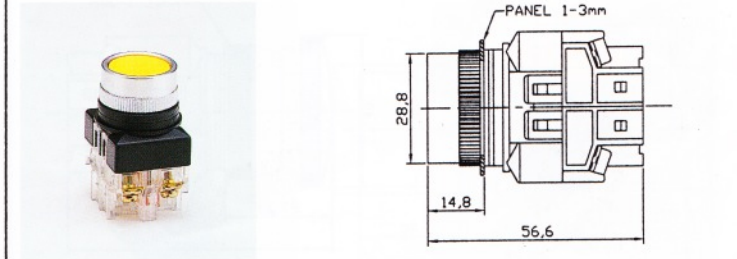




**PUSH BUTTON SWITCH**


**EPBK25-1B 25φ**




**PBK3011 30φ**




**EPBK2511 25φ**




**PB22-1A(N/O),22mm dia**




**PBK30-1a 30φ**




**PB22-1B(N/C),22mm dia**




**PBK30-1b 30φ**



**EPBK30-1b 30φ**



**EPBK3011 30φ**





**ILLUMINATED PUSH BUTTON SWITCH**


LPBT	25	2	R
------	----	---	---

Type	Mounting hole	Voltage		Lens color
LPBT: Standard W/TR	25: 25mm $\phi$	1	110V	R: Red
LPBTG: With Guard		2	220V	G: Green
LPBN: Standard W/Neon lamp	30: 30mm $\phi$	3	380V W/TR	Y: Yellow
LPBNG: Neon lamp W/Guard		4	440V	B: Black
		5	6V	
		6	18V W/O TR	
		7	24V	
		8	30V	


**SPECIFICATIONS**

AC 125V	AC 250V	AC 500V	DC 125V	DC 250V	DC 500V
10A	6A	3A	2A	1A	0.4A


LPBN25-1a, LPBN25-1b

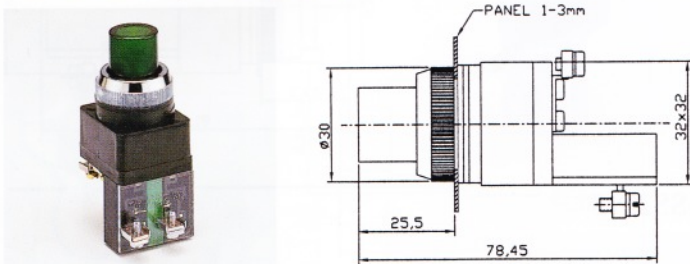


LPBN30-1a, LPBN30-1b

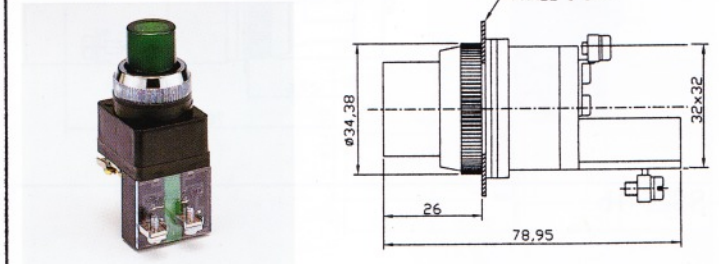


LPBN2511

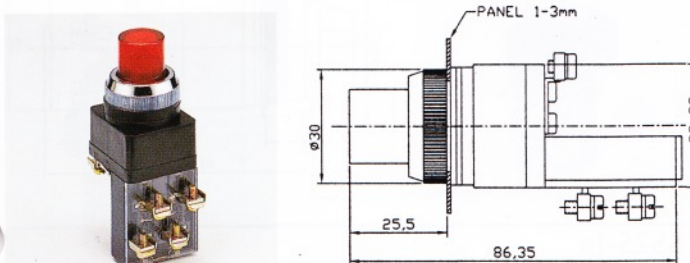


LPBN3011

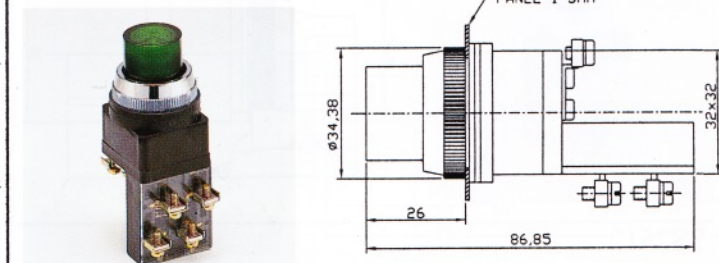


LPBT2511

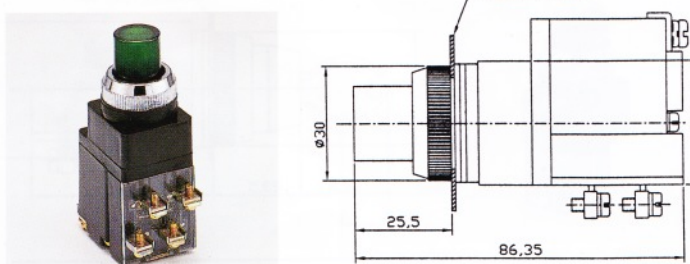


LPBT3011

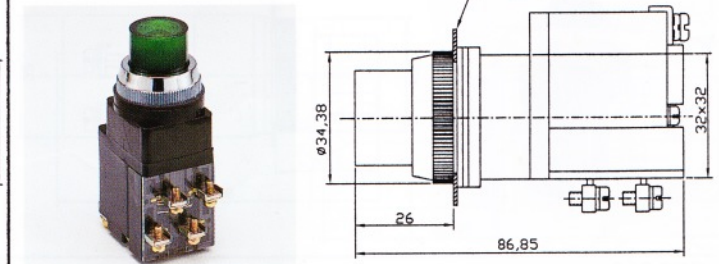

LPBTG2511

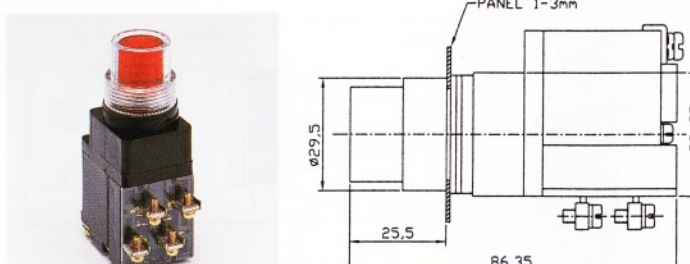

LPBTG3011

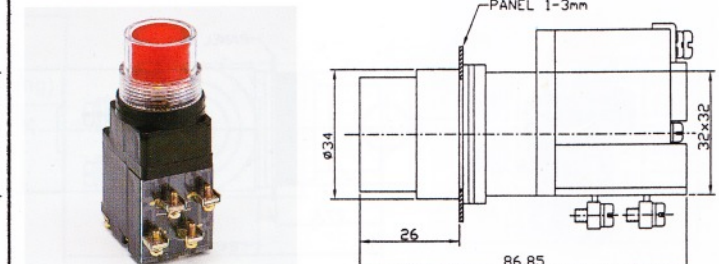




**SELECTOR SWITCH**

SS	25	1	a	2	B
Type	Mounting hole	No. of contact block fitted	Type of contact block fitted	Position	Knob color
SS: Knob type LSS: Lever operator KSS: Key type	25: 25mm $\phi$ 30: 30mm $\phi$	1 - 4	1a N/O 1b N/C 1a1b (N/O+N/C)	2 position 3 position	R: Red G: Green B: Black


**SPECIFICATIONS**

AC 125V 10A	AC 250V 6A	AC 500V 3A	DC 125V 2A	DC 250V 1A	DC 500V 0.5A
----------------	---------------	---------------	---------------	---------------	-----------------


SS25-1a

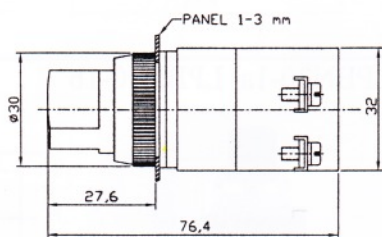


LSS2512

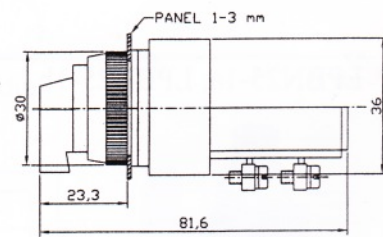


SS25-1b

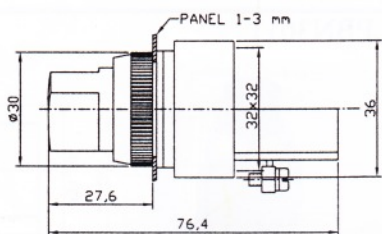


LSS2513

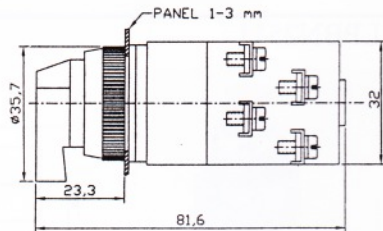


SS2512

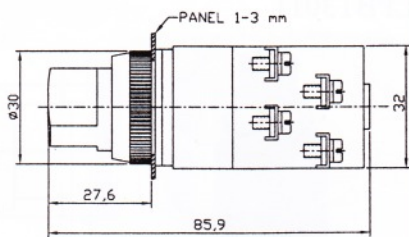


KSS25-1a

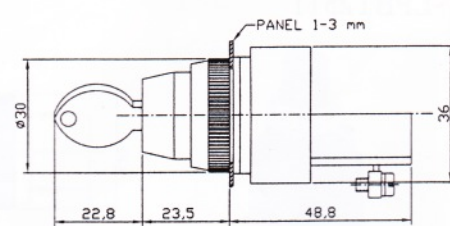

SS2513

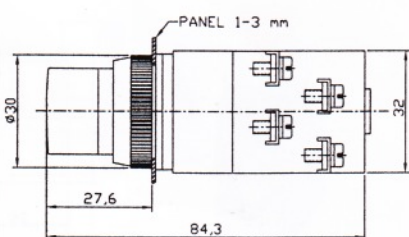


KSS2512

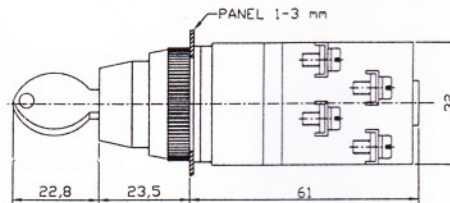




**SELECTOR SWITCH MONOLEVER SWITCH**


**KSS2513**

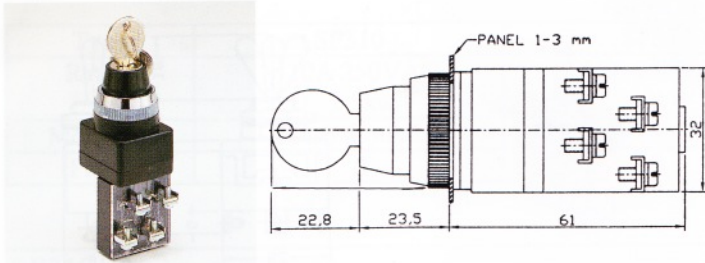


**LSS3012, 2 position**

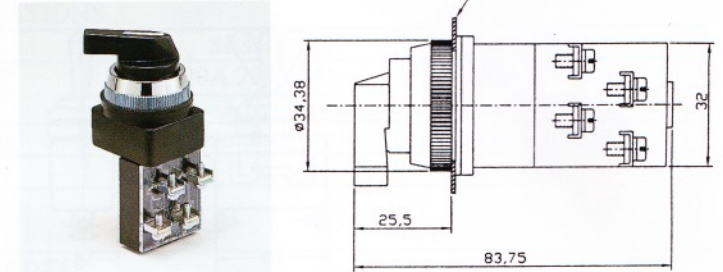


**SS30-1a**

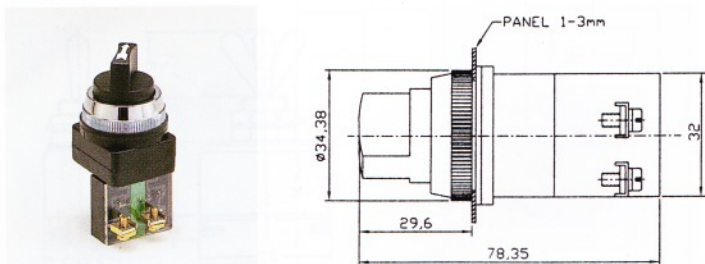


**LSS3013, 3 position**

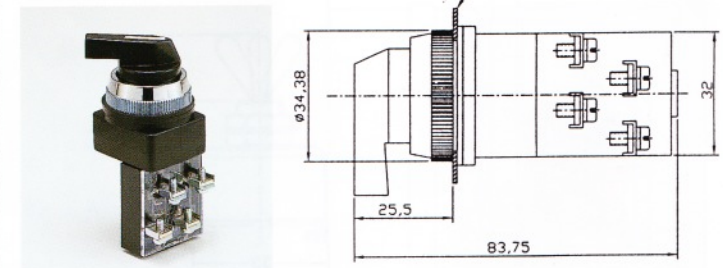


**SS30-1b**

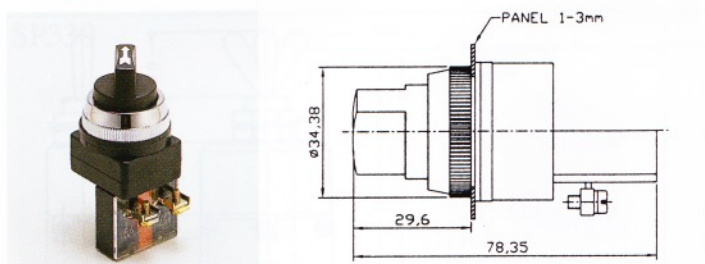


**KSS30-1a**

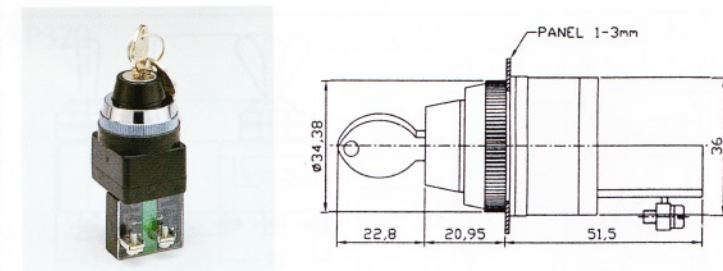


**SS3012**

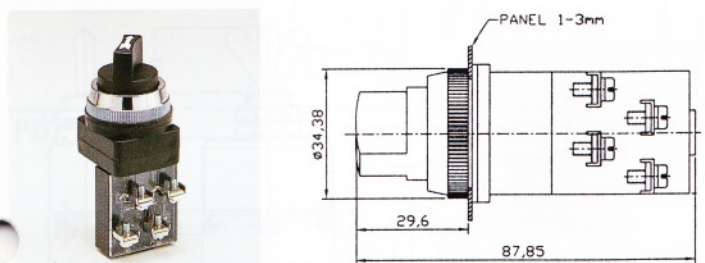


**KSS3012**

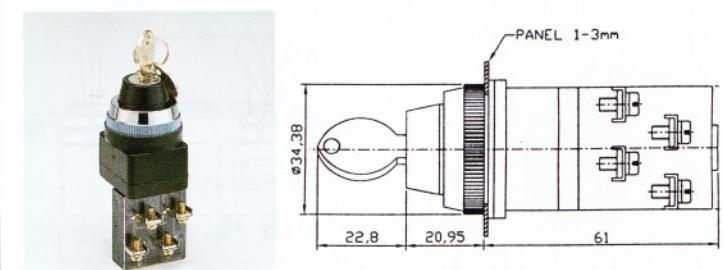

**SS3013**

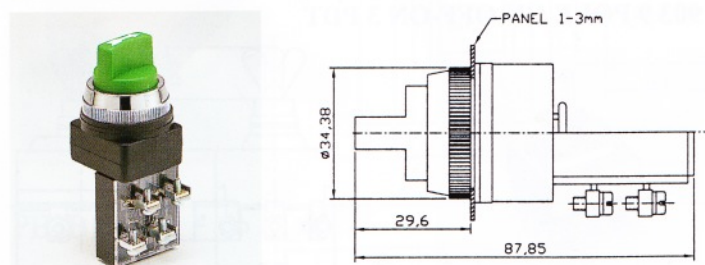

**KSS3013**

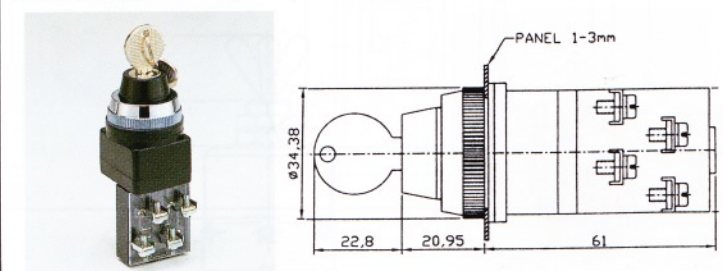

**MONOLEVER SWITCH MS30-1 (GO ON)**



Operation:	1 (GO ON) 2 (Auto-Return) 0 (Blockade-enforcing)	
Contact:	1a, 2a 1b, 2b 1a,+ 1b	4a 4b
Rating:	110V 5A 220V 3A 440V 1A	

**MS30-2 (AUTO RETURN)**

