

Digital-Simple Temperature Controller

S系列簡易型控制器

Appliance: Controlling temperature, humidity, pressure, flow, ph.
用途：控制—溫度、濕度、壓力、流量、酸鹼度.....等



■ Features:

1. 1/4, 1/8, 1/16 DIN Sizes.
2. Various Thermocouple Input selectable and RTD.
3. One-point alarm, with 22 alarm modes.
4. Sensor Break display indication, "oPEn"
5. Function of SMART TEMPERATURE TRANSDUCER
6. Program Lock can be set
7. °C or °F Option
8. Internally mounted Timer

■ 特性:

1. 尺寸及規格齊全(96x96mm, 48x96mm, 72x72mm, 48x48mm)
2. 多種輸入訊號可隨意選擇，包含PT100 Ω
3. 一組警報設定，每組有22種模式可選擇
4. 訊號斷線時會自動顯示 "OPEN"
5. 採用對話式設計，可省去查表之麻煩
6. 具有功能鎖定
7. 可選擇攝氏°C或 華氏°F
8. 具有計時器功能

■ SPECIFICATION:





Power Supply : AC 85V~265V, 50/60 HZ
Input : K, J, Pt, R, S, N, T, E, B, DC linear.....
Output: RELAY(250V/5A), DC24V, DC linear
Control: P, ON/OFF
P Band: 0%-200% full Scale
Cycle Time: 0-100 Sec.
Accuracy: ±0.3% Full Scale
Ambient Temperature: -10 °C~55 °C
Power Consumption: Less than 5VA
Input Impedance : 20M ohm 500V DC
High/Low Alarm : 22 alarm modes

■ 規格說明:

電源 : AC 85V~265V, 50/60 HZ
輸入 : K, J, Pt, R, S, N, T, E, B, DC linear.....
輸出 : RELAY(250V/5A), DC24V, DC linear
控制方式 : P, ON/OFF
比例帶 : 0%-200% 全刻度
比例週期 : 0-100 Sec.
精準度 : ±0.3% 全刻度
環境溫度 : -10 °C~55 °C
消耗電力 : 小於 5VA
輸入阻抗 : 20M ohm 500V DC
上/下限警報 : 22種模式

S系列簡易型控制器

DIMENSION 尺寸圖

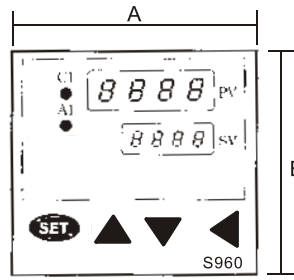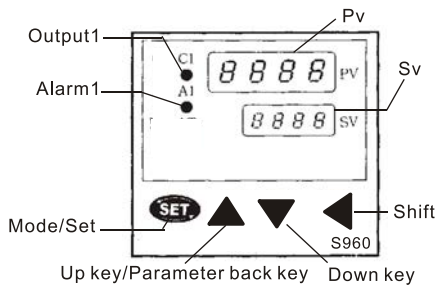


Panel Cutout 開孔尺寸

(Unit: mm)

Model 型號	A	B	C	D	E	a	b	c	d
SR-S960	96	96	12	92	91	92 ^{+0.5} _{-0.5}	92 ^{+0.5} _{-0.5}	120	110
SR-S720	72	72	12	92	67	68 ^{+0.5} _{-0.5}	68 ^{+0.5} _{-0.5}	100	85
SR-S490	48	96	12	92	91	46 ^{+0.5} _{-0.5}	92 ^{+0.5} _{-0.5}	120	60
SR-S480	48	48	8	92	45	46 ^{+0.5} _{-0.5}	46 ^{+0.5} _{-0.5}	75	60

WIRING DIAGRAM 接線圖

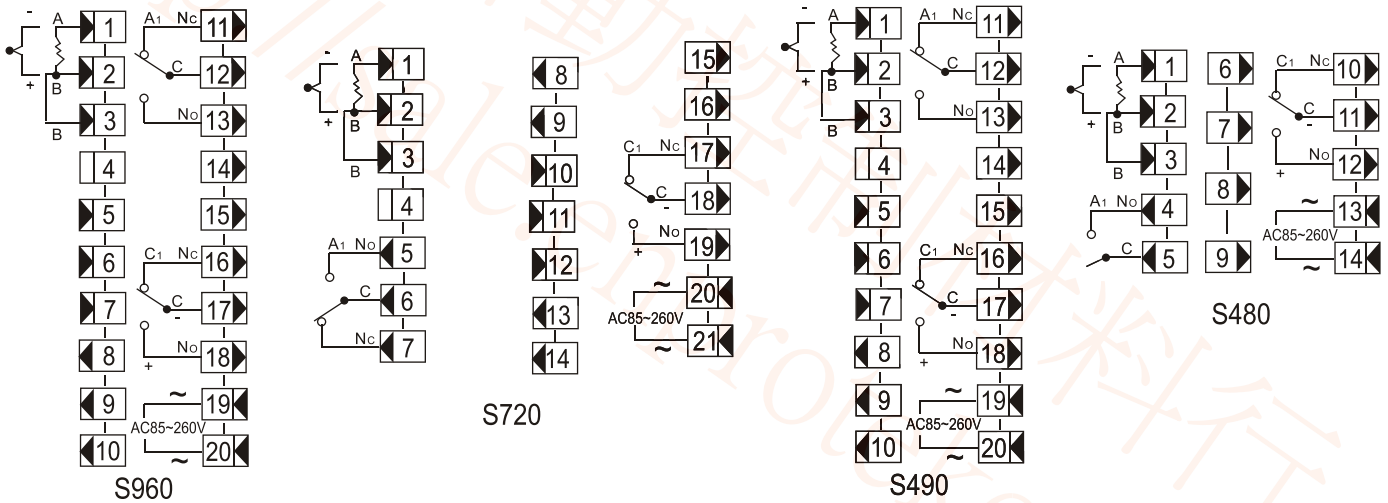

ORDERING CODE 訂貨編號

