
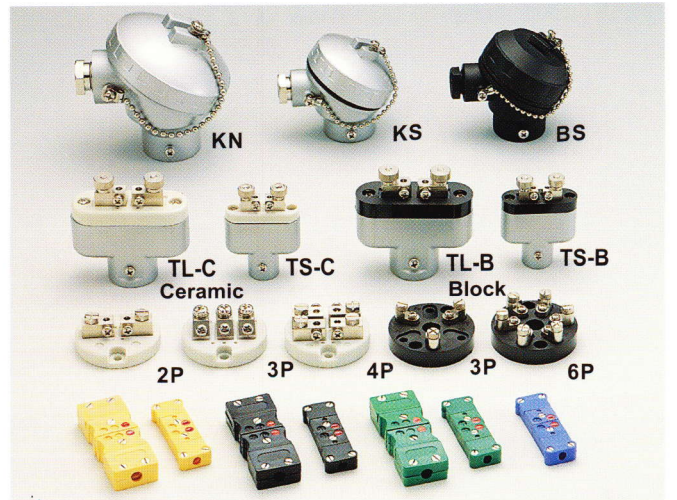
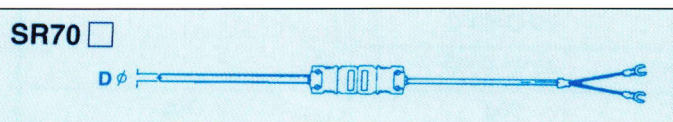
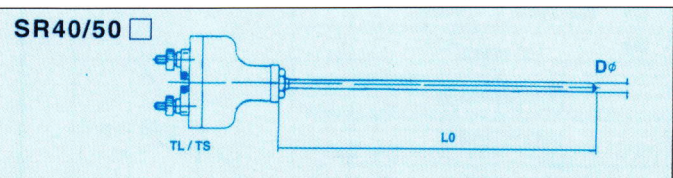
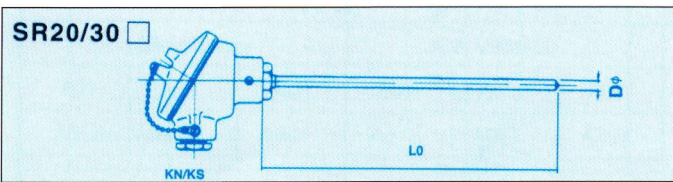
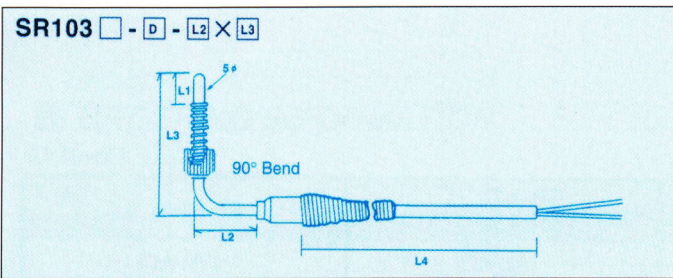
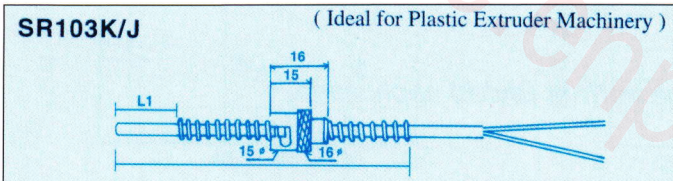
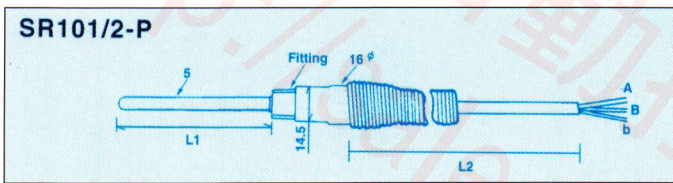
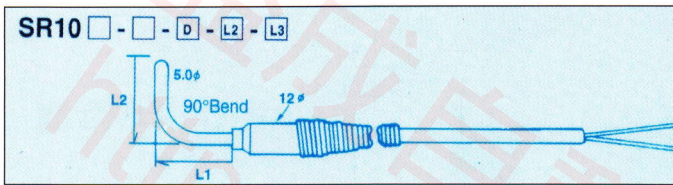
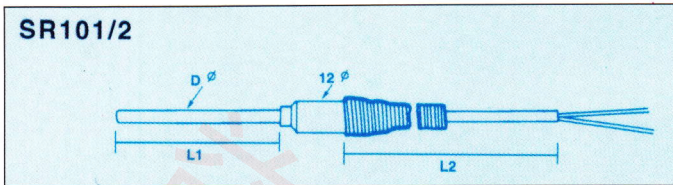
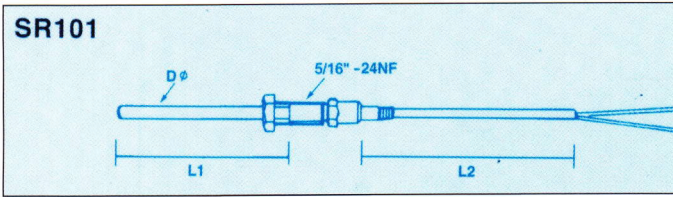


Thermocouple & RTD Sensor 感溫元件

■ TERMINAL BOX & BLOCKS 端子盒

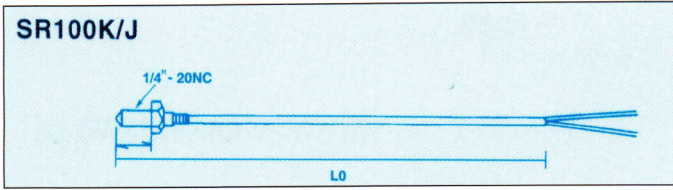

Model	Description
TBKN-□P-□	Large head with Block (大圓頭接線盒) 2P,3P,4P,6P
TBKS-□P-□	Small head with Block (小圓頭接線盒) 2P,3P,4P
TBTL-□P-□	Large T head with Block (大T頭接線盒) 2P
TBTS-□P-□	Small T head with Block (小T頭接線盒) 2P,3P
TBBS-□P-□	Bakelite head with Block (小電木頭接線盒) 2P,3P,4P

TYPE: COLOR CONNECTOR 快速接頭: SIZE:

K= Yellow 黃色 Plug (母) = P Standard(大)=S

J= Black 黑色 Adapter (公) = A Miniature(小)=M

R= Green 綠色

T= Blue 藍色

E= Purple 紫色

TB □ — □ □

■ EXTENSION WIRE 補償導線



Wire No. 料號	Specification 材質	Temp-Range 溫度
EW-K-OI	SUS304 Outside Insulation (玻璃纖維白鐵304外隔離)	0-150°C
EW-J-OI	SUS304 Outside Insulation (玻璃纖維白鐵304外隔離)	0-150°C
EW-K-GF	Glass Fiber (玻璃纖維)	0-150°C
EW-J-GF	Glass Fiber (玻璃纖維)	0-150°C
EW-R-GF	Glass Fiber (玻璃纖維)	0-150°C
EW-K-GP	T/C Grade PVC (PVC線)	0-100°C
EW-J-GP	T/C Grade PVC (PVC線)	0-100°C
EW-RTD- PVC	RTD PVC lead wire (PVC線)	0-100°C
EW-RTD -TF	RTD Tefion lead wire(鐵弗龍線)	0-200°C