


ORDERING INFORMATION 訂貨規格表

Ex.SSR- 05 D D-H


Output Current	Input Voltage	Output Voltage	High Voltage Type
05 : 5 A 10 : 10A 15 : 15A 25 : 25A 40 : 40A 50 : 50A 75 : 75A	D : DC 3~32V A : AC 80~250V V : Adjusted Output Voltage (Range = 0~90%)	D : DC5~60V A : AC24~380V	Nil : Standard Type H : Output Voltage AC75~480V DC5~200V

REFERENCE DATA 技術資料

Max, Allowable Case Temperature
最高容許表面溫度

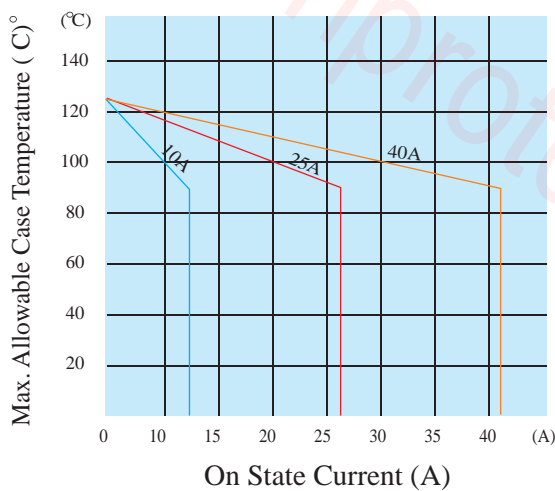

Peak Surge Current/Surge Current Duration
衝擊電流/承受次數

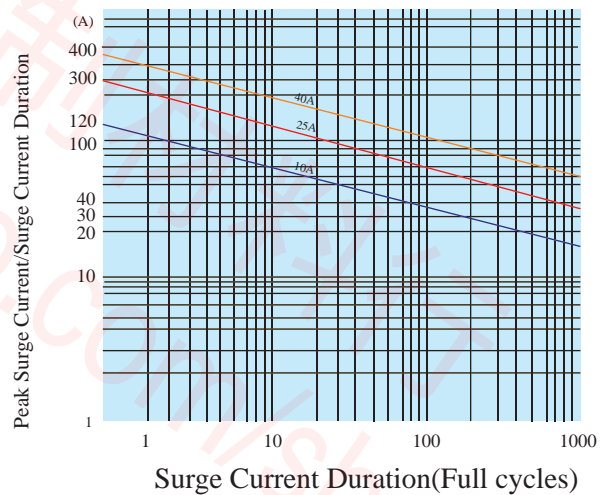

SSR



- SSR - □ DA
- SSR - □ DA-H
- SSR - □ AA
- SSR - □ AA-H
- SSR - □ VA
- SSR - □ DD

