

產品索引

- | | |
|---|---|
| 1. 法式按鈕、指示燈
European Push Button Switch & Pilot Lamp.....(1~4) | 24. 獨立座、測試端子
Individual Base & Test Terminal.....(287~291) |
| 2. 直接式指示燈
Direct Pilot Lamp.....(5~18) | 25. 單邊電子式端子盤
Single-Side Electronic Wiring Terminal Block.....(292~298) |
| 3. 變壓器式指示燈
Transformer Pilot Lamp.....(19~26) | 26. 10A~30A雙軌道卡式雙層端子盤
Double Layer Assembly Terminal Block.....(299~301) |
| 4. 閃爍式指示燈
Sparkling Pilot Lamp.....(27~32) | 27. 10A~200A軌道式端子盤
35 DIN Rail Mount Terminal Block.....(302~310) |
| 5. 按鈕開關、選擇開關
Push Button Switch & Selector Switch.....(33~46) | 28. 10A~400A卡式連接端子盤
Cassette Assembly Terminal Block.....(311~319) |
| 6. 直接式照光選擇、按鈕開關
Direct Illuminated Selector & Push Button Switch.....(47~59) | 29. 10A~400A固定式端子盤
10A~400A Fixed Terminal Block.....(320~328) |
| 7. 變壓器式照光選擇、按鈕開關
Transformer Illuminated Selector & Push Button Switch....(60~72) | 30. 端子盤系列用配件
Accessories For Terminal Block.....(329~341) |
| 8. 22Φ推拉式緊急開關、鑰匙開關
Push-Pull Emergency Stop & Key Switch.....(73~77) | 31. 樹脂密封式電磁鐵
AC Solenoid.....(342~356) |
| 9. 22Φ十字開關
Joystick Switch.....(78~81) | 32. 累時計
Hour Meter.....(357~365) |
| 10. 開關盒、專用標籤
Switch Box & Special Label.....(82~88) | 33. 計數器
Counter.....(366~375) |
| 11. 多色層式警示燈
Multi-Layer Tower Light.....(89~106) | 34. 二十四小時定時器
24 Hour Time Switch.....(376~381) |
| 12. 旋轉警示燈
Rotary Warning Light.....(107~120) | 35. 多段限時繼電器
Multi Range Timer.....(382~384) |
| 13. 蜂鳴器、警報器
Buzzer & Alarm.....(121~126) | 36. 馬達啟動控制器
Star-Delta Timer.....(385) |
| 14. 吊車開關
Hoist Push Button Switch.....(127~133) | 37. 電壓相位保護器
Voltage & Phase Protection Relay.....(386~389) |
| 15. 腳踏開關
Foot Switch (Pedal Switch).....(134~142) | 38. 點滅器
Auto Lighter.....(390~392) |
| 16. 動力押扣開關
Power Press-Retaining Switch.....(143~152) | 39. 液面開關
Floatless Level Switch.....(393~398) |
| 17. 微動開關、限動開關
Micro Switch & Limit Switch.....(153~195) | 40. 全指示K型溫度表
K Type Temperature Controller.....(399) |
| 18. 搖頭開關
Snap Switch (Toggle Switch).....(196~227) | 41. 指針型電表
Analog Panel Meter.....(400~412) |
| 19. 保險絲、保險絲座
Fuse & Fuse Base.....(228~246) | 42. 96x48數位型萬用電表
96x48 Type Digital Multimeter.....(413~421) |
| 20. 繼電器座、繼電器
Relay, Timer Socket & Relay.....(247~271) | 43. 96x96數位型萬用電表
96x96 Type Digital Multimeter.....(422~436) |
| 21. 固定式端子盤、18A連接式端子盤
Fixed Terminal Block & 18A Joint Terminal Block.....(272~280) | 44. 分流器
Shunt.....(437~450) |
| 22. 10A~30A美式固定端子盤
American Fixed Terminal Block.....(281~283) | 45. 比流器
Current Coil.....(451~457) |
| 23. 10A~30A軟式端子盤
PVC Terminal Block.....(284~286) | 46. 切換開關
Cam Switch.....(458~466) |



Full range of new designed CE connection.
全系列接點CE新設計



※新設計・雙頭按鈕
頭部指撥嵌入式・透明色罩・
字體及顏色隱藏第二層・
按鈕永不退色或模糊。

※NEW DESIGN - DPB
Use the finger dial style on the neck,
with the clear cover. The font and color
hide in the second layer.
The button is unfading or dim.



(61)KLPBT
22Q



(62)LPBT
22Q25Q30Q



(63)SLPBT
22Q25Q30Q



(64)KLPBT
25Q30Q



(65)EPBT
22Q25Q30Q



(66)KEPBT
25Q30Q



(67)MEPBT
30Q



(68)KMEPBT
30Q



(69)LEPBT
22Q25Q30Q



(70)MLEPBT
30Q



(71)OSST
22Q25Q30Q



(72)LSST
22Q25Q30Q



(73)LUPB
22Q
推拉式緊急開關



(74)LSPB
22Q
緊急鑰匙開關



(75)MLSPB
22Q
特大頭緊急鑰匙開關



(76)KSS02
22Q
二段鑰匙開關



(77)KSS03
22Q
三段鑰匙開關

CONTROL UNIT SERIES 開關組件圖



DIMENSIONS (mm)



(78)JSS1220
22Q
二段十字開關



(79)JSS2220
22Q
二段復歸十字開關





(80)JSS1440
22Q
四段十字開關





(81)JSS2440
22Q
四段復歸十字開關

ACTION (動作)



SWITCH BOX 開關盒

PHOTO 示	(82)		(83)		(84)		(85)		(86)	
TYPE 型式	Y221	Y301	Y222	Y302	Y223	Y303	Y224	Y304	Y225	Y305
FIXED DIAMETER 固定口徑	φ 22	φ 30	φ 22	φ 30	φ 22	φ 30	φ 22	φ 30	φ 22	φ 30

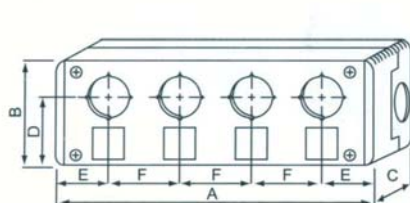

TYPE 型式	A	B	C	D	E	F	G	H
Y221 Y301	82	72	63	42	41	-	63	54
Y222 Y302	127	72	63	42	41	45	108	54
Y223 Y303	172	72	63	42	41	45	153	54
Y224 Y304	217	72	63	42	41	45	198	54
Y225 Y305	262	72	63	42	41	45	243	54


開關盒專用背膠銘牌 SPECIAL ADHESIVE PLATE FOR SWITCH BOX

(87) 按鈕及照光式按鈕、指示燈用 FOR BUTTON, ILLUMINATED BUTTON AND INDICATOR

TYPE	YB01	YB02	YB03	YB04	YB05	YB06	YB07	YB08	YB09	YB10
CHARACTER TYPE	O	I	II	III	IV	ON	OFF	START	STOP	UP
TYPE	YB11	YB12	YB13	YB14	YB15	YB16	YB17	YB18	YB19	YB20
CHARACTER TYPE	DOWN	SOURCE	HAND	AUTO	RUN	FWD	REV	CLOSE	OPEN	FAST
TYPE	YB21	YB22	YB23	YB24	YB25	YB26	YB27	YB28	YB29	YB30
CHARACTER TYPE	SLOW	RESET	ER.STOP	12V	24V	30V	110V	220V	0	1
TYPE	YB31	YB32	YB33	YB34	YB35	YB36	YB37	YB38	YB39	YB40
CHARACTER TYPE	2	3	4	5	6	7	8	9	開	關
TYPE	YB41	YB42	YB43	YB44	YB45	YB46	YB47	YB48	YB49	YB50
CHARACTER TYPE	啓動	停止	電源	手動	自動	寸動	運轉	正轉	逆轉	高
TYPE	YB51	YB52	YB53	YB54	YB55	YB56	YB57	YB58	YB59	YB60
CHARACTER TYPE	低	快速	慢速	連鎖	上	下	左	右	緊急	超載

(88) 選擇開關用 FOR SELECTOR SWITCH


TYPE	YS01	YS02	YS03	YS04	YS05	YS06	YS07	YS08	YS09	YS10
CHARACTER TYPE	I O	II I	I O II	III II I	ON OFF	ON ON	ON OFF ON	REV FWD	REV OFF FWD	AUTO HAND
TYPE	YS11	YS12	YS13	YS14	YS15	YS16	YS17	YS18	YS19	YS20
CHARACTER TYPE	AUTO OFF HAND	START STOP	UP DOWN	UP OFF DOWN	1 2	1 0 2	1 2 3	手動 自動	手動 停止 自動	正轉 逆轉
TYPE	YS21	YS22	YS23	YS24	YS25	YS26				
CHARACTER TYPE	正轉 停止 逆轉	運轉 停止	上 下	上 停 下	開 關	啓動 停止				

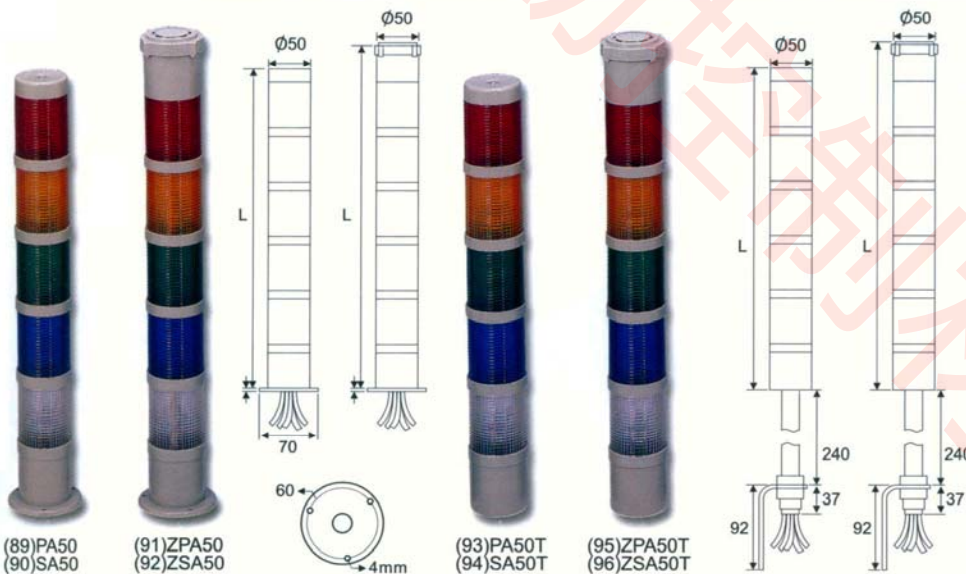

- 多色層疊指示燈再創突破性設計，燈桿不導電不生鏽，採用超韌性塑膠成型，與傳統式全然不同，色罩採內外反光條紋更突顯高級，層燈加塑膠隔環，整體以超美感為訴求，在任何條件下搭配，均可倍增價值感。
- 蜂鳴器採用90分貝BZ蜂鳴聲，非一般電子式高頻聲。

型 式：PA-指示式(PILOT LAMP TYPE)
SA-閃爍式(SPARKLING TYPE)
+ Z-蜂鳴器(BUZZER TYPE)

LAYER 層數	LENGTH 高度	Φ50(+) BUZZER 蜂鳴器	Φ60(+) BUZZER 蜂鳴器	COLOR 顏色
1	125	160	167	RED(紅)
2	190	225	232	ORANGE(橙)
3	255	290	297	GREEN(綠)
4	320	355	362	BLUE(藍)
5	385	420	427	CLEAR(白)

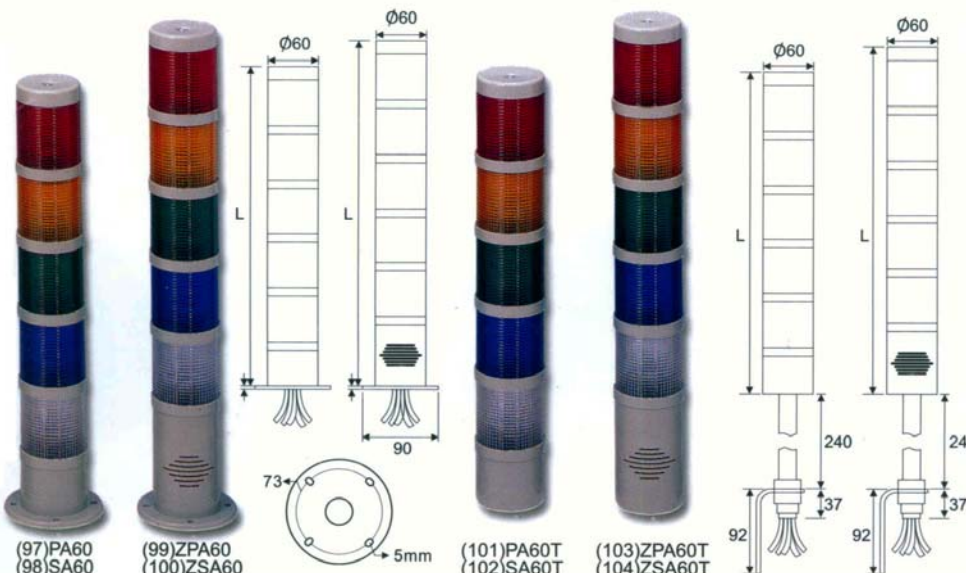


塑料燈桿：自然彈性+彈簧華司更不容易鬆動，媲美金屬材質，鎖緊適當扭力60~85kg，使用請參照成品之配件排列。





TYPE 型 式	ACTION 動 作	OPERATE FREQUENCY 操 作 頻 率	VOLTAGE 電 壓
PA	PILOT LAMP 指示式	1000 HOUR BEYOND	12V/24V/110V/220V
RA	ROTARY 旋轉式	160 RPM	12V/24V/110V/220V
SA	SPARKLING 閃爍式	0.2~1 SECOND	12V/24V/110V/220V
LED	ELECTRONIC ROTARY 電子旋轉式	160 RPM	12V/24V/110V/220V

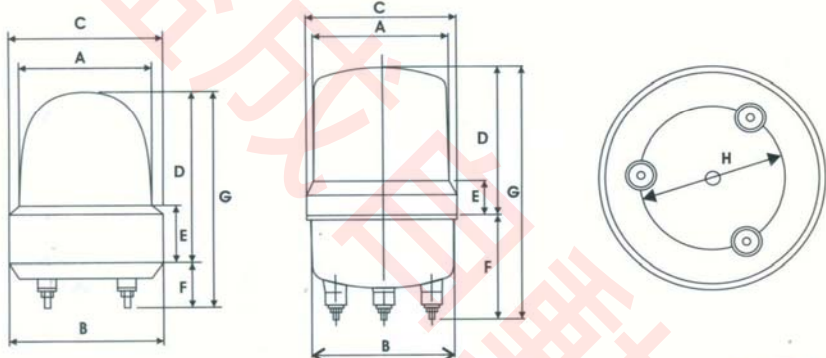

SIZE TYPE	A	B	C	D	E	F	G	H
A110	100	104	110	110	26	80	190	70
A130	120	123	130	125	21	80	205	100
A180	155	156	165	140.5	21	102.5	243	120
A100	95	109.5	109.5	142	54	43	185	70



(121)CBZ10
分貝(Decibel):90
12V/24V/110V/220V



(122)CBZ20
分貝(Decibel):90
12V/24V/110V/220V



(123)CBZ30
分貝(Decibel):90
12V/24V/110V/220V



(124)CBZ40
分貝(Decibel):100
110V/220V



(125)TCZ220
分貝(Decibel):100
12V/24V/110V/220V



(126)TCZ230
分貝(Decibel):100
12V/24V/110V/220V



(127)COB61
3W5A250V



(128)COB62
3W5A250V



(129)COB63
3W5A250V



(130)COB21
3W15A250V




(131)COB22
3W15A250V



(132)COB23
3W15A250V



(133)COB213
2W15A250V(單 相)



(134)FS-1
塑料腳踏開關



(135)FS-2
塑料腳踏開關



(136)FS-3
塑料腳踏開關



(137)FS-4
塑料腳踏開關



(138)FS-5
塑料腳踏開關



(139)FS-H3
半鋁合金腳踏開關



(140)FS-Z3
全鋁合金腳踏開關



(141)FS-Z4
全鋁合金腳踏開關



(142)FS-Z5
全鋁合金腳踏開關



(143)BT-2
0.75KW250V5A



(144)BT-3
0.75KW250V5A



(145)PCW315
1.5KW3P15A
動力押扣開關



(146)SP315
1.5KW3P10A
動力押扣開關



(147)SP320
2.2KW3P15A
動力押扣開關



(148)SP330
3.75KW3P30A
動力押扣開關



(149)SPS320
2.2KW3P15A
埋入式動力押扣



(150)SPS330
3.75KW3P30A
埋入式動力押扣



(151)SPY320
2.2KW3P15A
埋入式倉底蓋動力押扣



(152)SPY330
3.75KW3P30A
埋入式倉底蓋動力押扣



(153)Z15G1300



(154)Z15G1301



(155)Z15G1303



(156)Z15G1305



(157)Z15G1306



(158)Z15G1307



(159)Z15G1308



(160)Z15G1309



(161)Z15G1701



(162)Z15G1702



(163)Z15G1703



(164)Z15G1704



(165)Z15G1744



(166)Z15G1705



(167)WPF-O



(168)WPF-S



(169)AZ7100



(170)AZ7110



(171)AZ7120



(172)AZ7121



(173)AZ7124



(174)AZ7140



(175)AZ7141



(176)AZ7144



(177)AZ7310



(178)AZ7311



(179)AZ7312



(180)AZ7166



(181)AZ8104



(182)AZ8107



(183)AZ8108



(184)AZ8111



(185)AZ8112



(186)AZ8122



(187)AZ8166



(188)AZ8169




(189)AZ8200




Full range of New designed patent product · Complete line of model
· Quality are worth to trust. 新設計專利產品、式樣齊全、品質值得信賴

塑料製系列 — 搖桿鉍合金

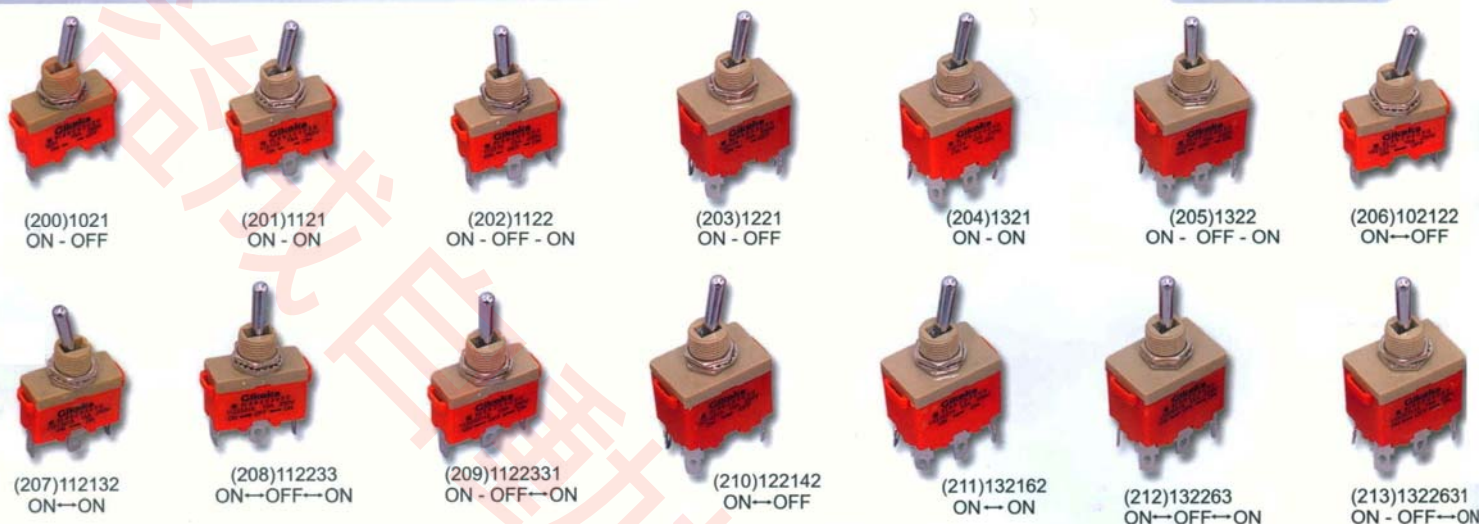


鉍合金系列

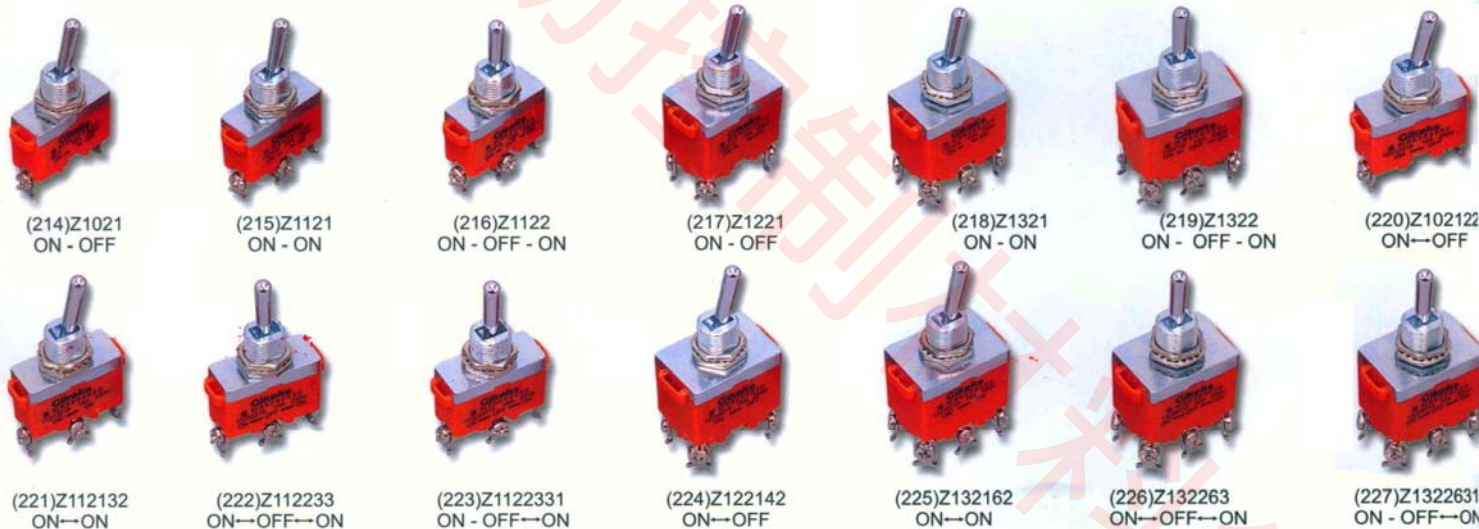




RELAY 繼電器 (帶燈型式+NJ)

		MK SERIES		MY SERIES		LY SERIES	
MODEL		MK2P	MK3P	MY-2	MY-4	LY-2	LY-4
EXTERNAL DIMENSION (mm)	L	34.7		27.6		27.6	27.6
	W	34.7		21.5		21.5	41.5
	H	52		34		36	36
CONTACT FORM		2A2B	3A3B	2A2B	4A4B	2A2B	4A4B
CONTACT CAPACITY		28V DC	220V AC	28V DC	220V AC	28V DC	220V AC
		10A		5A	3A	10A	
COIL	DC	6,12,24,48,110,220 V		6,12,24,48,110 V		6,12,24,48,110 V	
	AC	6,12,24,48,110,220,380 V		6,12,24,48,110,220 V		6,12,24,48,110,220 V	
CONTACT RESISTANCE		≤ 50mΩ		≤ 50mΩ		≤ 50mΩ	
INSULATION RESISTANCE		≥ 500mΩ		≥ 1000mΩ		≥ 1000mΩ	
DIELECTRIC STRENGTH		1500 AC 50/60 Hz		1000V AC 50/60 Hz		1500 AC 50/60 Hz	
SERVICE LIFE	MECHANICAL	10,000,000		10,000,000		10,000,000	
	ELECTRICAL	100,000		100,000		100,000	
TERMINAL		OUTLET AND SOLDER		OUTLET AND PRINTED - CIRCUIT BOARD		OUTLET AND PRINTED - CIRCUIT BOARD	

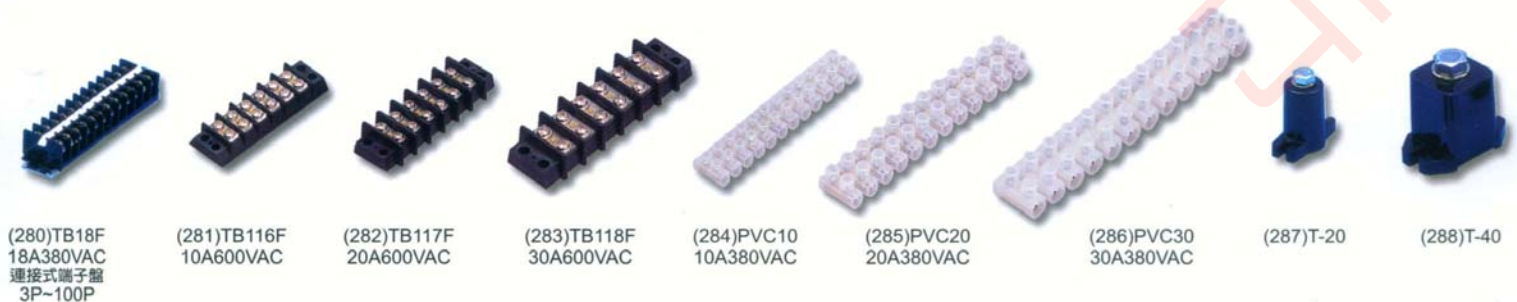

GTB DOUBLE LAYERS ASSEMBLY TERMINAL BLOCK GTB 雙軌道卡式雙層端子盤 (使用如圖示三種)

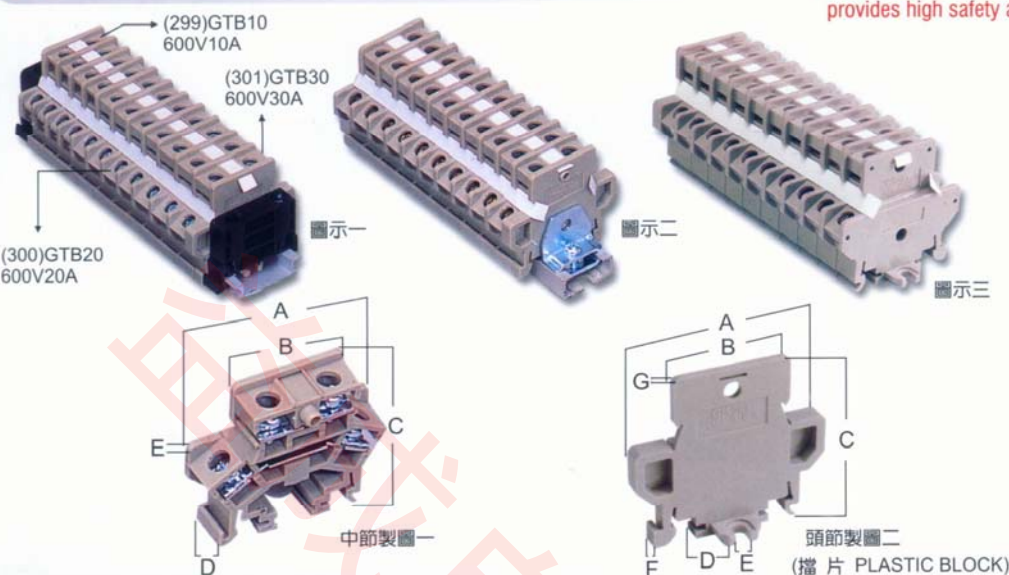


- 雙層端子盤系列榮獲專利產品，創高安全及高級美觀設計
- Double Layers Assembly Terminal Blocks series has patent and CE designer, provides high safety and aesthetic designed.

TYPE	GTB10	GTB20	GTB30	擋片 PLASTIC BLOCK
SIZE	600V 10A	600V 20A	600V 30A	
A	53	53	53	53
B	32	32	32	32
C	48.3	48.3	48.3	48
D	9.5	10.7	12.3	7
E	2	2	2	4
F				5.8
G				2.5
SCREW	3.5x7x6.6	3.5x7x8	4x7x9.8	

· P數尺寸直接使用 + 9 = 固定中心孔

P(Q'TY)	2	3	4	5	6	7	8	9	裝量 Q'TY
GTB10	24.8	34.3	43.8	53.3	62.8	72.3	81.8	91.3	150
GTB20	27.2	37.9	48.6	59.3	70	80.7	91.4	102.1	150
GTB30	30.4	42.7	55	67.3	79.6	91.9	104.2	116.5	150

ETB RAIL MOUNT TERMINAL BLOCK ETB 軌道式端子盤 RATING:600V10A~200A

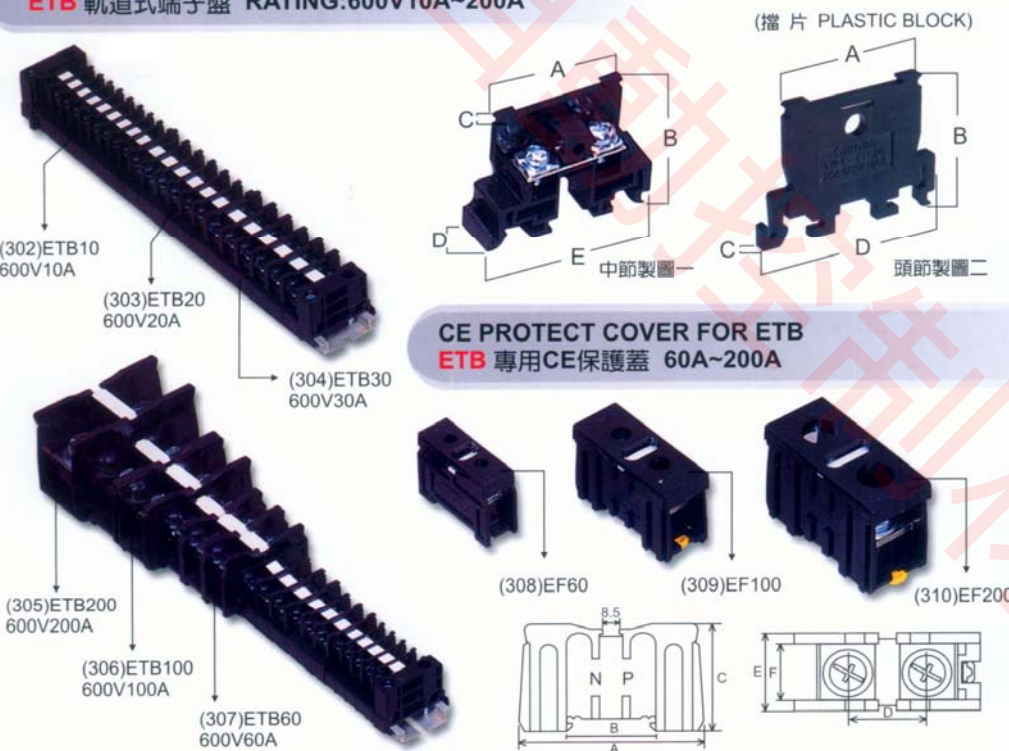

CE PROTECT COVER FOR ETB ETB 專用CE保護蓋 60A~200A


TYPE	ETB10	ETB20	ETB30	ETB10C	ETB20C	ETB30C
SIZE	600V 10A	600V 20A	600V 30A	擋片 PLASTIC BLOCK	擋片 PLASTIC BLOCK	擋片 PLASTIC BLOCK
A	29.2	31.7	36	29.2	31.7	36
B	30.5	30.5	30.5	30.5	30.5	30.5
C	2	2.3	3	3	2.7	2.6
D	8.9	11.2	13	41.5	41.5	41.5
E	41.5	41.5	41.5			
SCREW	3.5x7x6.6	3.5x7x8	4x7x9.8			

P(Q'TY)	2	3	4	5	6	7	8	9	10	裝量 Q'TY
ETB10	20.9	29.8	38.7	47.6	56.5	65.4	74.3	83.2	92.1	200
ETB20	24.7	35.9	47.1	58.3	69.5	80.7	91.9	103.1	114.3	200
ETB30	28.6	41.6	54.6	67.6	80.6	93.6	106.6	119.6	132.6	200

SIZE	A	B	C	D	E	F	G	裝量 Q'TY
EF60	55.5	25	15	9.5	19	7	8.5	150
EF100	73.5	30	21.5	14.2	28.4	10.3	9.5	62
EF200	86	43	21.3	19	38	18.6	9.5	30

SIZE	A	B	C	D	E	F	螺絲 SCREW	裝量 Q'TY
ETB60	56	35	38	25	19.8	14.8	6x12	150
ETB100	74	35	43	30	29	20.8	8x16	62
ETB200	86	35	54	43	38.5	30.3	10x20	30

FTB CASSETTE ASSEMBLY TERMINAL BLOCK FTB 卡式連接端子盤 (使用如圖示二種)

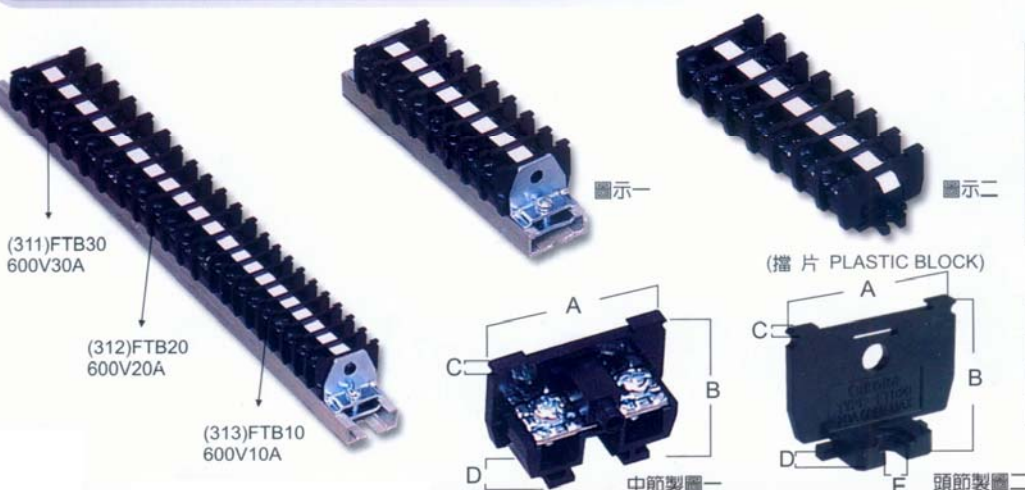

TYPE	FTB10	FTB20	FTB30	FTB10C	FTB20C	FTB30C
SIZE	600V 10A	600V 20A	600V 30A	擋片 PLASTIC BLOCK	擋片 PLASTIC BLOCK	擋片 PLASTIC BLOCK
A	29.2	31.7	36	29.2	31.7	36
B	24.4	24.4	24.4	24.4	24.4	24.4
C	1.9	2.3	2.9	1.9	2.3	2.9
D	8.9	11.2	13.2	7	7	7
E				4	4	4
SCREW	3.5x7x6.6	3.5x7x8	4x7x9.8			

· P數尺寸直接使用 + 9 = 固定中心孔

P(Q'TY)	2	3	4	5	6	7	8	9	10	裝量 Q'TY
FTB10	19.7	28.6	37.5	46.4	55.3	64.2	73.1	82	90.9	200
FTB20	24.7	35.9	47.1	58.3	69.5	80.7	91.9	103.1	114.3	200
FTB30	29.3	42.5	55.7	68.9	82.1	95.3	108.5	121.7	134.9	200


FTB CASSETTE ASSEMBLY TERMINAL BLOCK
FTB 雙軌道卡式連接端子盤 RATING:600V60A~400A



(使用如圖示三種)




TYPE	SIZE	P 數	2P	3P	4P	5P	6P	螺絲 SCREW
FTB60	L1	50.7	71.2	91.7	112.2	132.7		6x12
	L2	74.7	95.2	115.7	136.2	156.7		
FTB100	L1	64.2	91.2	118.2	145.2	172.2		8x16
	L2	88.2	115.2	142.2	169.2	196.2		
FTB150	L1	71	101.2	131.4	161.6	191.8		8x16
	L2	95	125.2	155.4	185.6	215.8		
FTB200	L1	82	117.7	153.4	189.1	224.8		10x20
	L2	106	141.7	177.4	213.1	248.8		
FTB300	L1	91	131	171	211	251		10x20
	L2	115	155	195	235	275		
FTB400	L1	111	161	211	261	311		10x20
	L2	135	185	235	285	335		

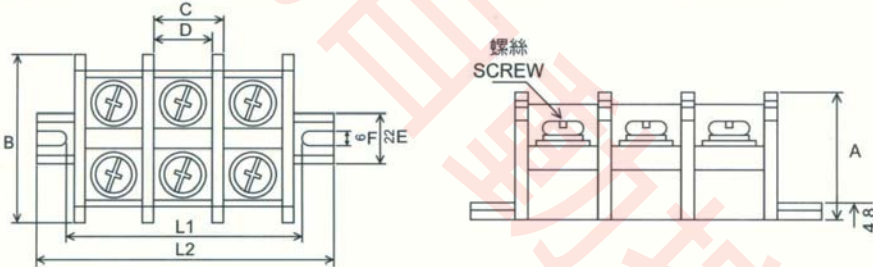


TYPE	SIZE	A	B	C	D	E	F	PLASTIC BLOCK	裝量 Q'TY
FTB60		38.5	50.2	20.5	17	22	6	32	96
FTB100		41	64.2	27	23	22	6	18	54
FTB150		42.5	70.1	30.2	26	22	6	16	48
FTB200		47.2	80.2	35.7	31.1	22	6	10	30
FTB300		50.3	106	40	35	22	6	6	18
FTB400		50.5	106	50	44.8	22	6	6	18

TB JOINT TYPE TERMINAL BLOCK
TB 連接式端子盤 RATING:600V10A~30A (2P~30P)

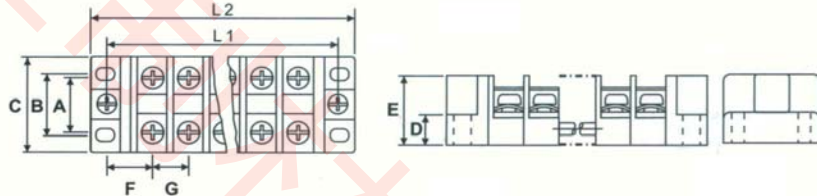


TB FIXED TERMINAL BLOCK
TB 固定式端子盤 RATING:600V60A~400A

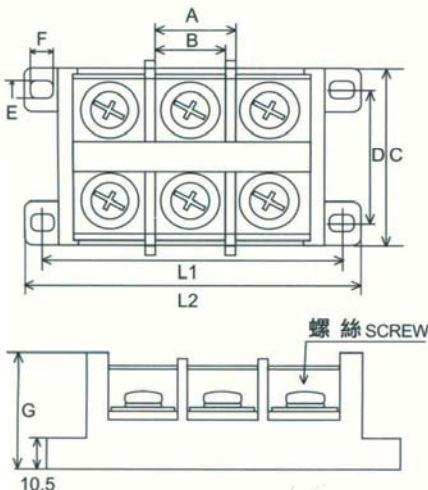


TYPE	SIZE	A	B	C	D	E	F	G	P 數	2P	3P	4P	5P	6P	螺絲 SCREW
TB10	L1	15	19.8	29	9.8	26.8	14.6	8.9		36.3	45.2	54.1	63	71.9	3.5x7
	L2									46.6	55.5	64.1	73.3	82.2	
TB20	L1	15	19.8	31.5	9.9	26.8	15.9	11.1		40.6	51.7	62.8	73.9	85	3.5x7
	L2									50.9	62	73.1	84.2	95.3	
TB30	L1	18.9	24.8	36	11.7	26.8	18.5	13.2		47.8	61	74.2	87.4	100.6	4x7
	L2									59	72.2	85.4	98.6	111.8	
TB60	L1	18	15.2	48	30	6.7	8.7	31.5		60.7	78.7	96.7	114.7	132.7	6x12
	L2									75.6	93.6	111.6	129.6	147.6	
TB100	L1	22.9	19.9	60.2	42	6.7	8.7	37		70.6	93.5	116.4	139.6	162.2	8x16
	L2									86	108.9	131.8	154.7	177.6	
TB150	L1	28.3	24.8	70.5	51.5	6.7	8.7	41		81.2	109.5	137.8	166.1	194.4	8x16
	L2									96.9	125.2	153.5	181.1	210.1	
TB200	L1	36.3	31.8	81.3	62	6.7	8.7	47.5		X	131.5	167.8	X	X	10x20
	L2									X	147	183.3	X	X	
TB300	L1	41.7	36.9	107	59	6.1	10	58.7		X	156	197.7	X	X	10x20
	L2									X	176	217.7	X	X	
TB400	L1	51.5	46.7	107	59.5	6.1	10	58.7		X	186	237.7	X	X	10x20
	L2									X	205	256.5	X	X	


SHORT-CIRCUIT TERMINAL 短路端子

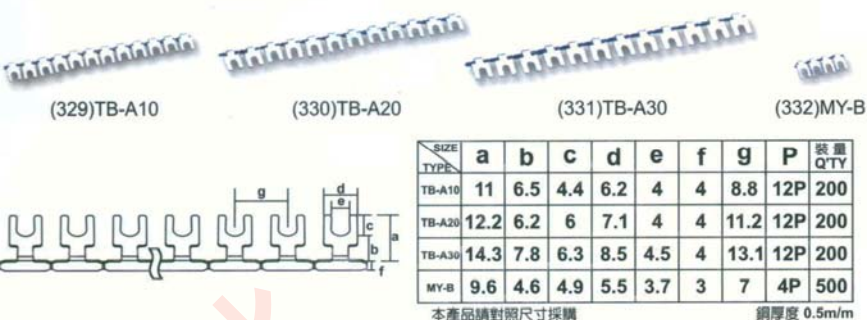


TERMINAL BLOCK PROTECT COVER ㄇ型防塵蓋

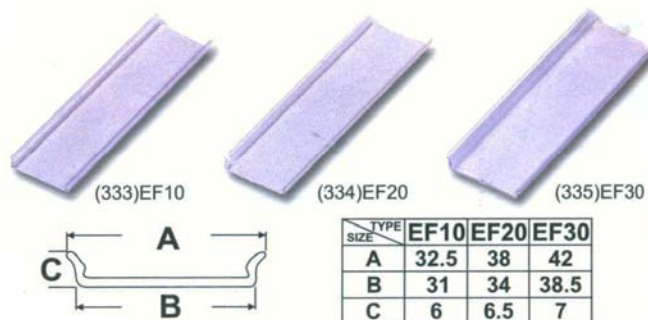

ALUMINUM RAIL 軌道

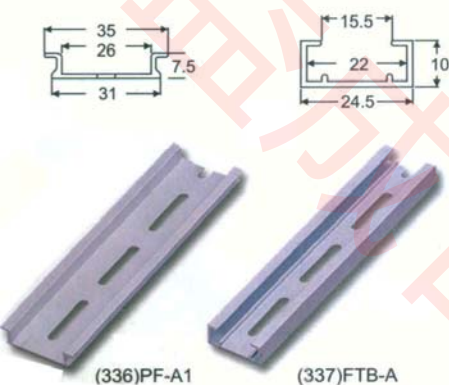

RAIL FIXED BLOCK 軌道固定擋片

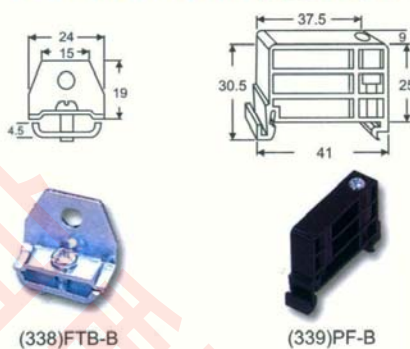

PRINTED TAPE 印字膠帶




· 200米長印字空白膠帶
適用 Gikoka 端子盤，
10A、20A、30A 全系列
列均共用。

AC SOLENOIDS

樹脂密封式電磁鐵



COIL EPOXY TYPE

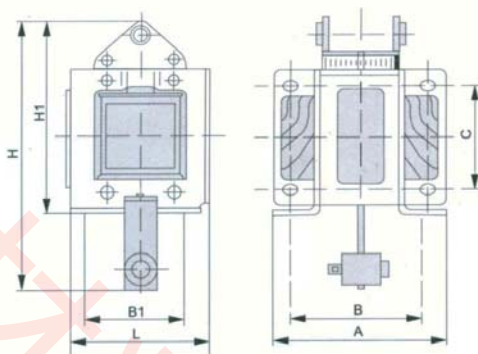

DIMENSIONS

目錄 編號	ITEM NO.	RATED PULL (KG)	RATED STROKE (MM)	FREQUENCY OF OPERATION per hr	RATED VOLTAGE (AC)	H	H1	L	A	B1	B	C
(342)	ASD-02N	0.2	10	1500	24. 36. 110. 220. 380.	53	48	27	41	24	35	35
(343)	ASD-03N	0.3	10	1500	24. 36. 110. 220. 380.	47	47	30	42	25	33	33
(344)	ASD-05N	0.5	10	1500	24. 36. 110. 220. 380.	85	62	38	34.5	28	24	33
(345)	ASD-06N	0.6	10	1500	24. 36. 110. 220. 380.	85	62	38	37	28	27	33
(346)	ASD-08N	0.8	10	1500	24. 36. 110. 220. 380.	85	62	38	43	28	62	33
(347)	ASD-1N	1.0	15	1200	24. 36. 110. 220. 380.	93	69	47	45.5	34	65	35
(348)	ASD-1.5N	1.5	15	1200	24. 36. 110. 220. 380.	93	69	47	51	34	41	35
(349)	ASD-2N	2.0	15	1200	24. 36. 110. 220. 380.	93	69	47	55.5	34	45	35
(350)	ASD-3N	3.0	20	900	36. 110. 220. 380.	130	96	61.5	71	46	55.5	46
(351)	ASD-4N	4.0	20	900	36. 110. 220. 380.	130	96	61.5	76	46	61	46
(352)	ASD-5N	5.0	20	900	36. 110. 220. 380.	130	96	61.5	82	46	67	46
(353)	ASD-6N	6.0	30	900	220. 380.	171	123	84	102	64	83	64
(354)	ASD-8N	8.0	30	900	220. 380.	171	123	84	112	64	93	64
(355)	ASD-10N	10	40	600	220. 380.	201	146.5	100	87	60	70	60
(356)	ASD-12N	12	40	600	220. 380.	201	146.5	100	97.5	60	80	60




UNIT:mm



(357)THM-AS
機械式露出累時計
110V/220V 60Hz







(358)THM-AF
機械式埋入累時計
110V/220V 60Hz

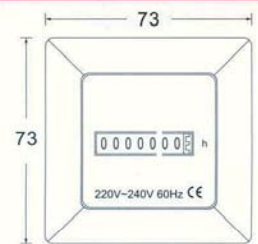



(359)THM-AF73
73x73 面板



(360)THM-3F
機械式小型埋入累時計
110V/220V 60Hz
可變換二種規格使用

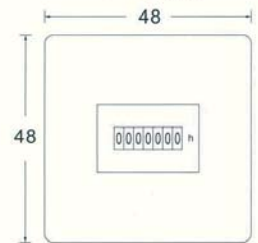


(361)THM-3F48
48x48 面板


PICTURE	HOUR COUNTER 電子式累時計				COUNTER 電子式計數器			
								
ITEM NO.	LHS-6 (362)	LHS-8 (363)	LHS-6V (364)	LHS-8V (365)	LCS-6 (366)	LCS-8 (367)	LCS-6V (368)	LCS-8V (369)
COUNT INPUT	- 輸入信號：接點短路 - CONTACT INPUT: BY SHORT CIRCUIT - CONTACT RESISTANCE: $\leq 10K \Omega$ (ON) $\geq 500K \Omega$ (OFF)		- 輸入信號：電壓4~30VDC - VOLTAGE INPUT: 4-30V DC		- 輸入信號：接點短路 - CONTACT INPUT: BY SHORT CIRCUIT - CONTACT RESISTANCE: $\leq 10K \Omega$ (ON) $\geq 500K \Omega$ (OFF)		- 輸入信號：電壓4~30VDC - VOLTAGE INPUT: 4-30V DC	
NUMBER OF COUNTS	9999H59M	999999H59M	9999H59M	999999H59M	0-999999	0-99999999	0-999999	0-99999999
COUNTING SPEED	SIGNAL WIDTH: ≥ 1 SEC.				10 CPS (SIGNAL WIDTH: 50ms)			
RESET	SIGNAL WIDTH: ≥ 0.2 SEC.				VOLTAGE INPUT: 4-30V DC (SIGNAL WIDTH: ≥ 0.2 SEC.)			
CONNECTION DIAGRAM	 COUNT INPUT: ① - ② RESET INPUT: ③ - ④		 COUNT INPUT: ① - ② RESET INPUT: ③ - ④		 COUNT INPUT: ① - ② RESET INPUT: ③ - ④		 COUNT INPUT: ① - ② RESET INPUT: ③ - ④	




(370)EM5L
電磁式計數器
復歸 + 鎖錠
12V/24V/110V/220V

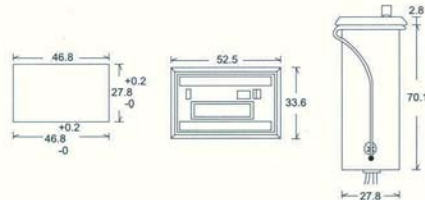


(371)EM5R
電磁式計數器
復歸 + 鎖錠
12V/24V/110V/220V

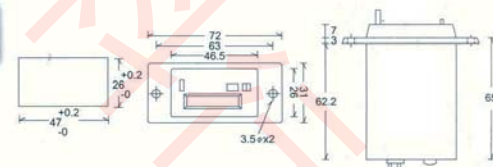


(372)EM6L
電磁式計數器
復歸 12V/24V/110V/220V

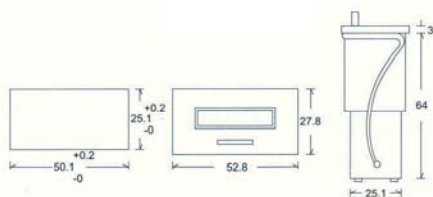


(373)EM6R
電磁式計數器
復歸 12V/24V/110V/220V

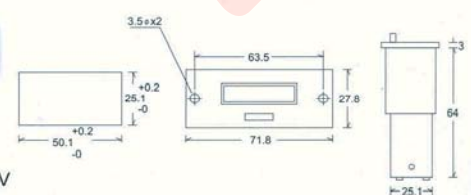

(374)EMD6L
電磁式計數器
DC6V/12V

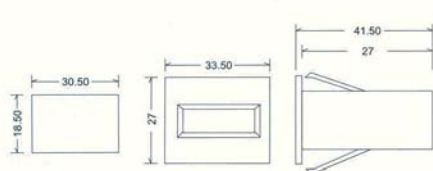

(375)EMD6R
電磁式計數器
DC6V/12V

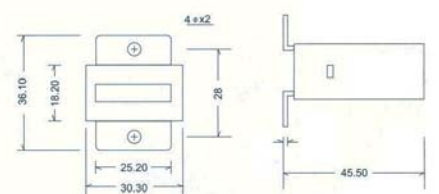

TBH系列產品，啟動電流請勿超過額定電流，若超過請搭配電磁開關再行使用。



(376)TBH35N
24H 多段定時器
停電記憶 100 H
全電壓適用 110V~220V15A



(377)TBH35
24H 多段定時器
單電壓 110V/220V20A



(378)TBH37
24H 多段定時器
單電壓 110V/220V15A
接點獨立式




(379)TBH45
24H 多段定時器
停電記憶 100H
全電壓適用 110V~220V16A
1A 接點獨立式
迷你型軌道式固定




(380)TBH370
24H 多段定時器
停電記憶 150 H
全電壓適用 110V~220V16A
接點獨立式



(381)TBH66W
七日型多段定時器
停電記憶兩週
全電壓適用 110V~220V5A
接點獨立式



(382)TH3AB
四段單電壓限時繼電器
接點型式：
切換 A. 二組延時
切換 B. 一組延時一組瞬時



(383)TH3T40
TH3 用埋入架



(384)TH3-H
TH3 用掛勾



(385)TSDT
馬達啟動控制器



(386)TVP00122 單相 (220V) 60Hz
(387)TVP00322 三相 (220V) 60Hz
(388)TVP00338 三相 (380V) 60Hz
(389)TVP00344 三相 (440V) 60Hz
高低電壓欠逆相保護器
上列規格 50Hz 可定製。



(390)TA06(6A)
(391)TA10(10A)
(392)TA15(15A)
點滅器
單電壓 110V/220V



(393)T61F-G
一組式液面開關
全電壓適用 110V~220V



(394)T61F-G1
二組式液面開關
全電壓適用 110V~220V



(395)T61F-G2
一組式液面開關 + 警報接點
全電壓適用 110V~220V



(396)TPS-3S
電極棒固定座



(397)TSA
電極棒一米長



(398)TSS
電極棒接頭



(399)TCK-3
全指示 K 型溫度表
全電壓 110V~220V

- Model No. TCK-3 full deviation indicator temperature controller.
- TCK-3 din size (96x96mm) temperature controller with P.D. function.
- Indicator knob setting.

SPECIFICATIONS

- (1) supply voltage: 110/220V AC 50/60Hz
- (2) Operation voltage: 90% to 110% of rated voltage.
- (3) Power consumption: Approx <2VA
- (4) Temperature sensor: K, E, J, T, PT-100
- (5) Standard scale range: 0-400 (DEGREE C)

STANDARD ACCESSORY


- 1 Piece Thermocouple Wire When Temperature Under 600 Degree C CA (K) Type: TCK
- Thermocouple Wire Length: 2M
- 標準配件：一組K型600°C熱電偶二米長




CHARACTERISTICS

Setting accuracy		±1.5% max. of full scale
Indication accuracy		±2.5% max. of full scale
Hysteresis	Control output	0.2% of full scale (fixed)
PD setting range	Proportional hand (P)	1-3% of full scale
	Rate time (D)	30 ± 10S

DIMENSIONS/mm

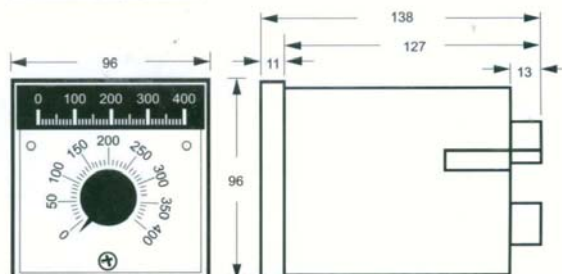




CONNECTIONS

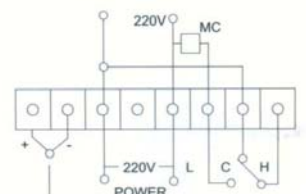




· 電錶系列榮獲大陸及台灣專利產品，創新科技設計，增強產品壽命及精準穩定性為主要訴求，品質值得信賴
· Panel Meter Series has the honor to get mainland china and Taiwan's patent, The great originality technology design provides enhanced the mechanical life and accuracy stability are main requests; the high quality can be reliable.






(400)PM-110

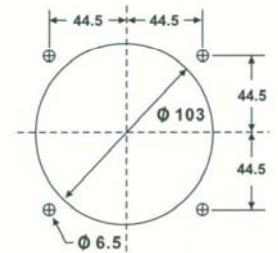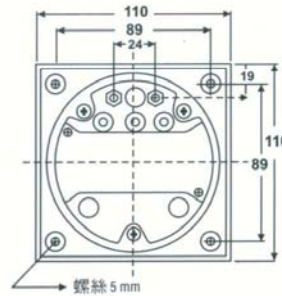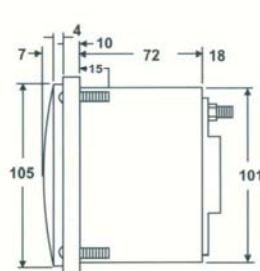

(401)PM-96

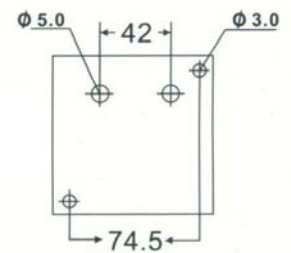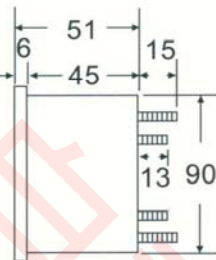


(402)PM-72

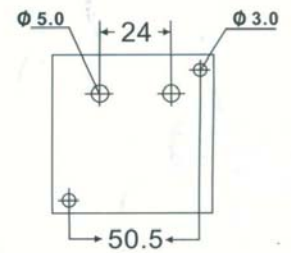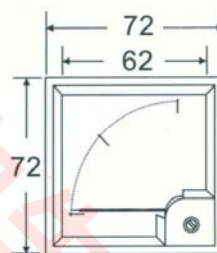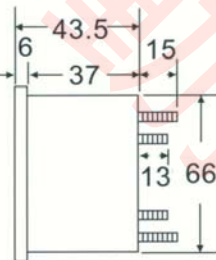

(403)PM-120S



(404)PM-100S



(405)PM-100



(406)PM-80



(407)PM-670



(408)PM-65



(409)PM-60





(410)PMO-65 圓形式



(411)PM-50



(412)PMO-45 圓形式

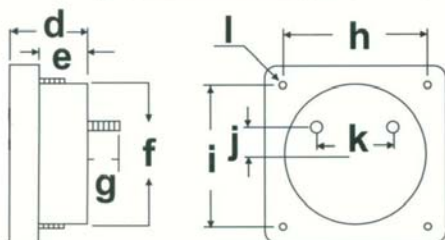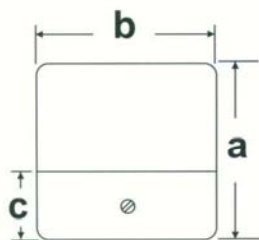

TYPES	a	b	c	d	e	f	g	h	i	j	k	l
PM-120S	100	120	34	36.8	22.7	68.2	6	102.4	81.5	6	40.2	4
PM-100S	81.5	100	30	36.5	23	63.5	6	82.5	62	3.5	37	4
PM-100	101	101	38	38	25	83	13	79	79	10	41.5	3
PM-80	81	81	32	37	24	63.2	6	64.5	64.5	10	34	3
PM-670	61	71	25	36.5	23	51	6	48	48	5	28	3
PM-65	66	66	26	37	26	51.5	6	51	51	12	27	3
PMO-65	82.4	82.4	31	36	36	64.8	6	63△	63△	3.5	38	4
PM-60	60	60	26	36	23.5	51.5	6	48.5	48.5	3.5	25	3
PM-50	51	51	20	32.5	22.5	44.5	9	38	38	12	21	3
PMO-45	48.5	48.5	12.7	37	27.3	44.5	焊錫	37	37	11.3	20	4

DIGITAL MULTIMETER



(413)TDM9648-A



(414)TDM9648-V



(415)TDM9648-Hz



(416)TDM9648-AV
A,V 二用



(417)TDM9648-E
A,V,HZ 三用

TDM-9648 SERIES

特點：最新多功能的結構設計，採前置按鈕設定方式，均可任意性操作，使用要求簡單方便為原則，規格齊全敬請選用。

DISPLAY		Red high efficiency LED high 14.22mm (.56")
ACCURACY		±0.5% ±2 digit
OPERATING CONDITION		-10°C~50°C (20% to 90% RH non-condensed)
DIELECTRIC STRENGTH		AC 2KV/1min
AUX · POWER		AC110V/220V 50/60Hz
MEASUREMENT RANGE	TDM9648-A	Ranges:Ammeter Direct Measurement Current: AC 0 - 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key "C" to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA).
	TDM9648-V	Range:AC 50-600V. Voltmeter
	TDM9648-Hz	Frequency:1-99.9Hz. Frequency-meter Input voltage:AC 50-600V.
	TDM9648-AV A,V 二用	Ranges:Two in one switchable Ammeter & Voltmeter Direct Measurement Current: AC 0-5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key "C" to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA). Voltage: AC 50-600V.
	TDM9648-E A,V,HZ 三用	Ranges: Three in one switchable Ammeter & Voltmeter & Frequency-meter Direct Measurement Current: AC 0-5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key "C" to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA). Voltage: AC 50-600V. Frequency: 1-99.9Hz.
STANDARD FEATURES	DIGITAL MULTIMETER Function Indicator Hz A V Gikoka TDM9648-E · This key is for selecting C.T. ratio. · Hz A V · This Key for setting measuring function. (Hz→A→V)	
DIMENSION	DIGITAL MULTIMETER Gikoka TDM9648-E 48mm 96mm 107mm 91.5mm 44.5mm	

DIGITAL MULTIMETER



(422)TDM96-A



(423)TDM96-V



(424)TDM96-Hz




(425)TDM96-AV
A,V 二用



(426)TDM96-E
A,V,HZ 三用

TDM-96 SERIES

特點：最新多功能的結構設計，採前置按鈕設定方式，均可任意性操作，使用要求簡單方便為原則，規格齊全敬請選用。

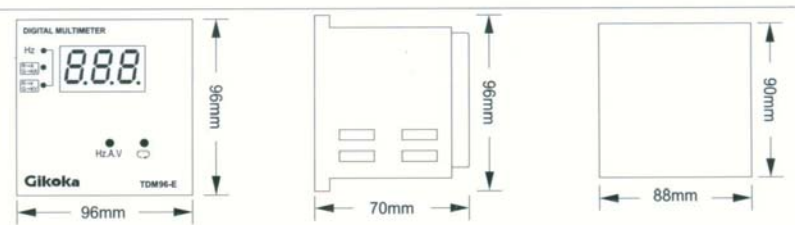DISPLAY		Red high efficiency LED high 14.22mm (.56")
ACCURACY		±0.5% ±2 digit
OPERATING CONDITION		-10°C ~ 50°C (20% to 90% RH non-condensed)
DIELECTRIC STRENGTH		AC 2KV/1min
AUX · POWER		AC110V/220V 50/60Hz
MEASUREMENT RANGE	TDM96-A	Ranges: Ammeter Direct Measurement Current: AC 0 - 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key $\leftarrow$ to select desirable C.T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA).
	TDM96-V	Range: AC 50-600V. Voltmeter
	TDM96-Hz	Frequency: 1-99.9Hz. Frequency-meter Input voltage: AC 50-600V.
	TDM96-AV A,V 二用	Ranges: Two in one switchable Ammeter & Voltmeter Direct Measurement Current: AC 0 - 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key $\leftarrow$ to select desirable C.T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA). Voltage: AC 50-600V.
	TDM96-E A,V,HZ 三用	Ranges: Three in one switchable Ammeter & Voltmeter & Frequency-meter Direct Measurement Current: AC 0 - 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key $\leftarrow$ to select desirable C.T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA). Voltage: AC 50-600V. Frequency: 1-99.9Hz.
STANDARD FEATURES		 Function Indicator • This key is for selecting C.T. ratio. • This key is for selecting measuring function. (Hz→A→V)
DIMENSION		 96mm 96mm 70mm 88mm 90mm

DIGITAL MULTIMETER



(427)TDM96-KW1 單相
(428)TDM96-KW3 三相



(429)TDM96-PF1 單相
(430)TDM96-PF3 三相



(431)TDM96-3A
同時顯示 3A



(432)TDM96-3V
同時顯示 3V





(433)TDM96-3AV
3A,3V(切換)




(434)TDM96-3M
同時顯示 A,V,HZ
(435)TDM96-4M
同時顯示 3A
3V 切換顯示
(436)TDM96-5M
同時顯示 3A,HZ
3V 切換顯示

TDM-96 SERIES

DISPLAY		Red high efficiency LED high 14.22mm (.56")
ACCURACY		±0.5% ±2 digit
OPERATING CONDITION		-10°C~50°C (20% to 90% RH non-condensed)
DIELECTRIC STRENGTH		AC 2KV/1min
AUX · POWER		AC110V/220V 50/60Hz
MEASUREMENT RANGE	TDM96-KW1	Function:Multi Range KW Meter. Display single phase power. Input Current: For Current below AC 5A, the meter can be used directly. For Current above 5A, Current Transformer (C.T.) must be used. Press Key "C/T" to select desirable C.T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Input Voltage: AC 50-600V.
	TDM96-KW3	Function:Multi Range KW Meter. 3Φ3W or 3Φ4W combined power. Please do advise. Input Current: For Current below AC 5A, the meter can be used directly. For Current above 5A, Current Transformer (C.T.) must be used. Press Key "C/T" to select desirable C.T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Input Voltage: AC 50-600V.
	TDM96-PF1	Function: Power Factor Meter - Single Phase. Range: LEAD 0.5-1-0.5LAG. Input Current: For Current below AC 5A, the meter can be used directly. For Current above 5A, Current Transformer (C.T.) must be used. Press Key "C/T" to select desirable C.T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Input Voltage: AC 50-600V.
	TDM96-PF3	Function: Power Factor Meter - 3Φ3W only. Range: LEAD 0.5-1-0.5LAG. Input Current: For Current below AC 5A, the meter can be used directly. For Current above 5A, Current Transformer (C.T.) must be used. Press Key "C/T" to select desirable C.T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Input Voltage: AC 50-600V.
STANDARD FEATURES		 Function Indicator 8.8.8 Kw This key is for selecting C.T. ratio. Gikoka TDM96-KW
DIMENSION		  



(450)CSH-5000A/50mv

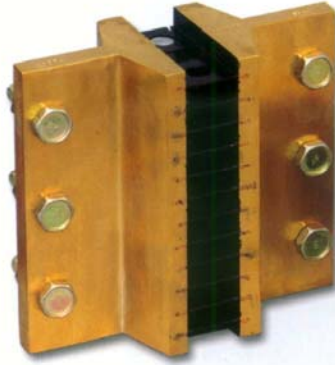


(448)CSH-3000A/50mv
(449)CSH-4000A/50mv



(446)CSH-1500A/50mv
(447)CSH-2000A/50mv



(444)CSH-800A/50mv
(445)CSH-1000A/50mv



(443)CSH-600A/50mv



(441)CSH-400A/50mv
(442)CSH-500A/50mv



(440)CSH-300A/50mv





(439)CSH-200A/50mv





(437)CSH-10A-50A/50mv
(438)CSH-60A-150A/50mv



CSH10A-50A/50mv
CSH60A-150A/50mv
CSH200A/50mv

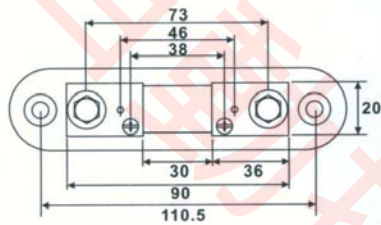



CSH800A/50mv

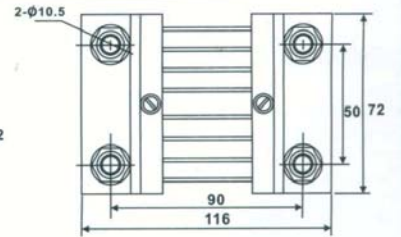



CSH300A/50mv

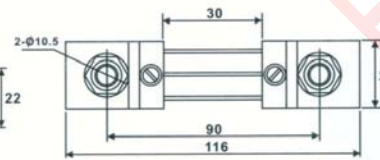



CSH1000A/50mv

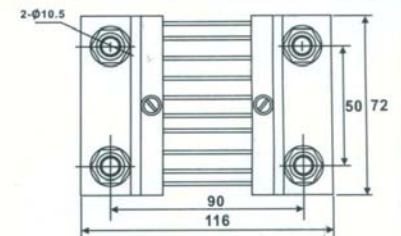



CSH400A/50mv

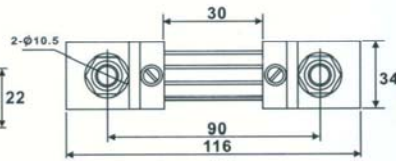



CSH1500A/50mv
CSH2000A/50mv

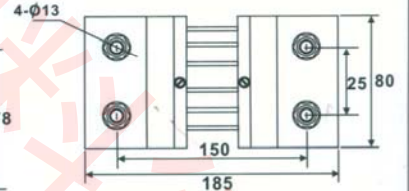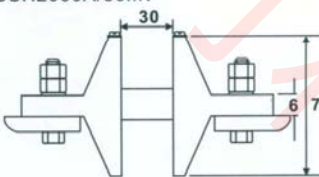



CSH500A/50mv

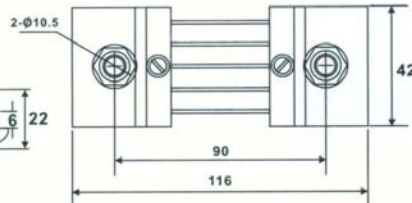



CSH3000A/50mv
CSH4000A/50mv

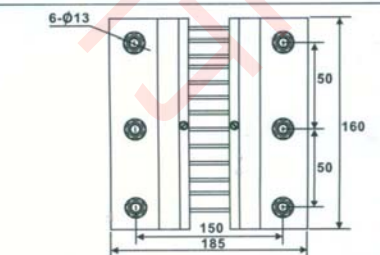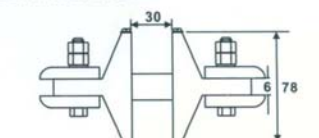

CSH600A/50mv

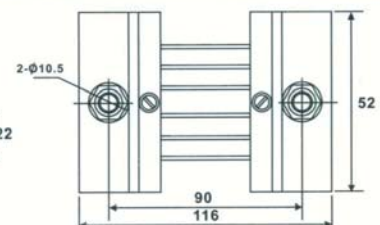

CSH5000A/50mv

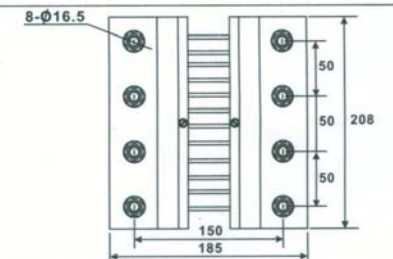




標準：JISC1731(計器用變流器)
定格負擔：3VA
定格一次電流：10~6000A
定格二次電流：使用1.6m/m電線,3VA5A
精確度：1.0級
周波數：50/60HZ
系統電壓：600V
熱過電流強度：40
外殼材質：ABS樹脂
定格負擔：3VA以上精度，請另行接洽承製。

電氣特性

外型尺寸圖

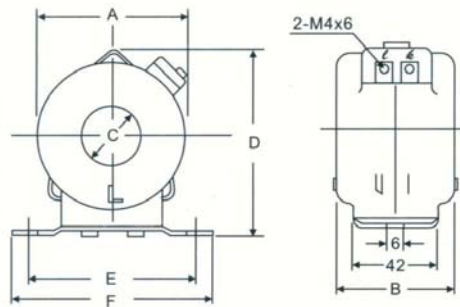

型 式 Model	A φ	B	C φ	D	E	F
CT - 29	74	55	29	92	84	98
CT - 39	80	55	39	102	84	98
CT - 61	102	55	61	121	105	125
CT - 85	121	55	85	140	130	156
CT - 105	141	55	105	157	130	156
CT - 125	166	55	125	190	160	187
CT - 150	210	55	150	230	143	190



FEATURES

Transparent cover design allows contact's stroke-operation visible.
Silver-alloy & Sliding Contacts reliable & accurate operation.
Complied with "BS4794, JIS-4520, VDE-0660, IEC408 & UL508" codes.
Small size switch serves pitch saving.
Rear wirings allow work easy
Available front access mounting.

NAME PLATE FRAME

There are frames shaped square which are mounted name plate.
They are gray in color.

特徵：


接點活動透明蓋設計使用者可以看見且一次操作，銀接點平滑的接觸讓人相信 & 操作精準。遵守 BS4794、JIS-C-4520、VDE-0660、IEC408 & UL508 號。

背面設計 - 全線容易操作
前面設計 - 向前可以鎖嵌


※各種特殊規格，請另行接洽承製。

面板 Frame "1"


面板 Frame "2"

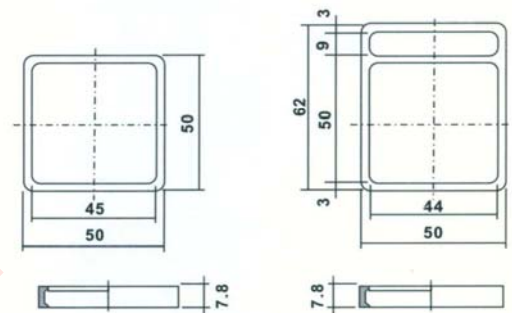

面板 Frame "1,2"


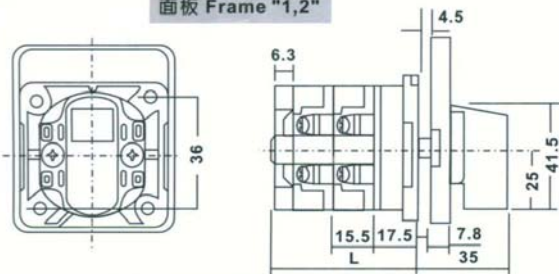


面板 Frame "3,4"

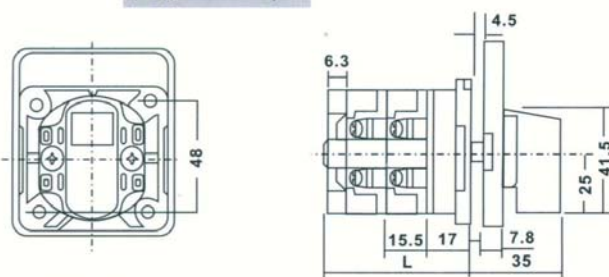


A

B




面板 Frame "3"


面板 Frame "4"

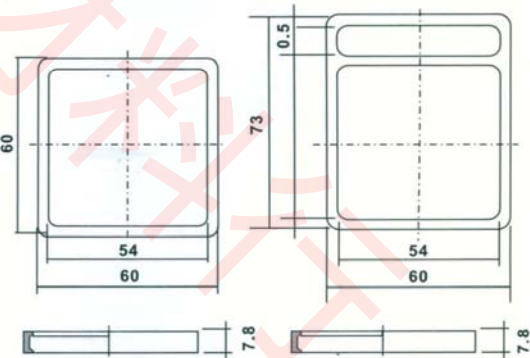


1-1 STANDARD SYSTEM FOR SYSTEM FOR CS 安裝方式(一)：

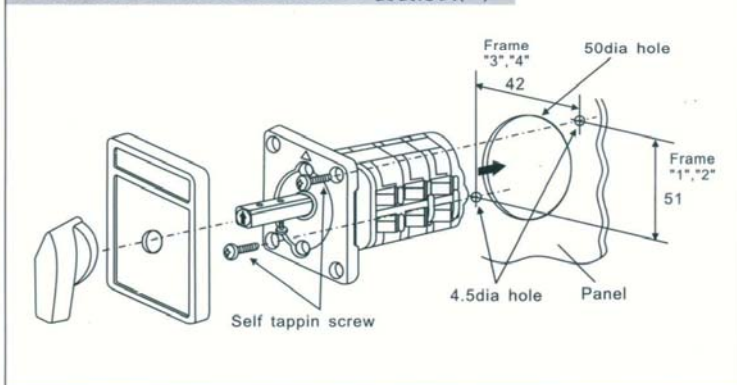

1-2 STANDARD SYSTEM FOR SYSTEM FOR CS 安裝方式(二)：

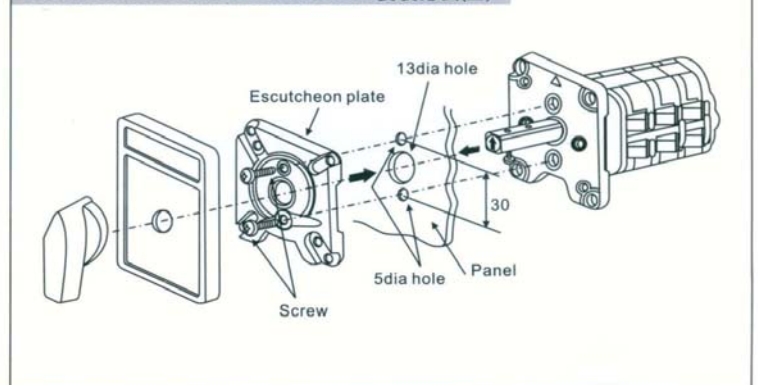

TDM-96 SERIES DIGITAL MULTIMETER

DISPLAY	Red high efficiency LED high 9.14mm (.36")	
ACCURACY	$\pm 0.5\%$ ± 2 digit	
OPERATING CONDITION	$-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$ (20% to 90% RH non-condensed)	
DIELECTRIC STRENGTH	AC 2KV/1min	
AUX · POWER	AC110V/220V 50/60Hz	
MEASUREMENT RANGE	TDM96-3A 同時顯示3A	Display: 3 Windows. Function: Display 3 Phase Current Simultaneously. Ranges: Direct Measurement Current: AC 0 - 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key " $\frac{C}{T}$ " to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA).
	TDM96-3V 同時顯示3V	Display: 3 Windows. Function: Display 3 Phase Voltage Simultaneously. Range: AV 50-600V.
	TDM96-3AV 3A, 3V, (切換)	Display: 3 Windows. Function: Press Key "A/V" For Selecting Measuring Function: Display 3 Phase Current Simultaneously OR Display 3 Phase Voltage Simultaneously. Ranges: Direct Measurement Current: AC 0 - 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key " $\frac{C}{T}$ " to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA). Voltage: AC 50-600V.
	TDM96-3M 同時顯示A, V, Hz	Display: 3 Windows. Function: Display Current, Voltage, and Frequency Simultaneously. Ranges: Direct Measurement Current: AC 0 - 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key " $\frac{C}{T}$ " to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA). Voltage: AC 50-600V. Frequency: 1-99.9Hz.
	TDM96-4M 同時顯示3A 3V 切換顯示	Display: 4 Windows. Function: Display 3 Phase Current and 1 Phase Voltage Simultaneously. Press Key "V1/V2/V3" to switch voltage display among 3 phases. Ranges: Direct Measurement Current: AC 0 - 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key " $\frac{C}{T}$ " to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA). Voltage: AC 50-600V.
	TDM96-5M 同時顯示3A, Hz 3V 切換顯示	Display: 5 Windows. Function: Display 3 Phase Current, 1 Phase Voltage, and Frequency Simultaneously. Press Key "V1/V2/V3" to switch voltage display among 3 phases. Ranges: Direct Measurement Current: AC 0 - 5A. For Current above 5A, Current Transformer (C.T.) must be used. Press Key " $\frac{C}{T}$ " to select desirable C. T. Ratio. The following are the available C.T. Ratios: 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1kA/5A, 1.2kA/5A, 1.5kA/5A, 1.6kA/5A, 2kA/5A, 2.5kA/5A, 3kA/5A, 4kA/5A, 5kA/5A, 6kA/5A, 7kA/5A, 7.5kA/5A, 8kA/5A. Note: Red LED indicates Ampere. Green LED indicates Kilo-ampere (kA). Voltage: AC 50-600V. Frequency: 1-99.9Hz.
STANDARD FEATURES	 • This key is for selecting C.T. ratio. • This Key for setting measuring function. (V1--V2--V3)	
DIMENSION	