

ROCKER SWITCH

Features

- Power switch conforms to safety standards for electrical equipment.
- Compact with a good space factor.
- Snap-in type for easy mounting.
- The color can be changed to correspond to the set design.



E88392 

Applications

- Information and office equipment such as personal computers, word processors, facsimiles, monitors, etc.

Specifications

ITEM	STANDARD
Rating	10A 125V AC/ 6A 250V AC, 4A 125VAC/2A 250VAC
Insulation Resistance	100M Ω min (DC 500V)
Dielectric Strength	AC 1500V (50/60Hz for 1 minute)
Contact Resistance	50m Ω max.
Electrically Life	10,000 cycle
Operating Force	400 \pm 200 gf

Product Selection

R9 —

SERIES	FUNCTION	ACTUATOR MARKING OPTION
CODE		CODE MARKING
2 <input type="checkbox"/> A	ON OFF	N NONE
3 <input type="checkbox"/> B	ON ON	P — ○
2 <input type="checkbox"/> C	ON OFF ON	Q ○
3 <input type="checkbox"/> D (ON - OFF)		R ●
3 <input type="checkbox"/> E (ON) - ON		S ○
3 <input type="checkbox"/> F (ON)-OFF-(ON)		T
2 <input type="checkbox"/> AL	ON OFF (With LED)	
32ALP	ON OFF (With Lamp)	

PANEL HOLE SIZE		
PANEL THICKNESS	DIM. X	DIM. Y
0.75 ~ 1.25	19.2	13.0
1.25 ~ 2.0	19.4	13.0
2.0 ~ 3.0	19.6	13.0

Terminal Type

TERMINAL TYPE					
CODE	TERMINAL	CODE	TERMINAL	CODE	TERMINAL
2 PIN		3 Soldering		4 PCB	

HIGHLY

F1

Design, specifications are subject to change without notice.

ROCKER SWITCH

Dimensions

UNIT:mm

Item NO.	Dimensions	Function	Circuit												
R9-22A		<table border="1"> <tr><th colspan="2">SWITCHING FUNCTION</th></tr> <tr><td>OFF</td><td>ON</td></tr> </table>	SWITCHING FUNCTION		OFF	ON									
SWITCHING FUNCTION															
OFF	ON														
R9-33B		<table border="1"> <tr><th colspan="2">SWITCHING FUNCTION</th></tr> <tr><td>ON</td><td>ON</td></tr> </table>	SWITCHING FUNCTION		ON	ON									
SWITCHING FUNCTION															
ON	ON														
R9-24A		<table border="1"> <tr><th colspan="3">SWITCHING FUNCTION</th></tr> <tr><td>ON</td><td>NONE</td><td>ON</td></tr> </table>	SWITCHING FUNCTION			ON	NONE	ON							
SWITCHING FUNCTION															
ON	NONE	ON													
R9-32F		<table border="1"> <tr><th colspan="3">SWITCHING FUNCTION</th></tr> <tr><th>CODE</th><td>ON</td><td>OFF</td></tr> <tr><td>OFF</td><td>ON</td><td>OFF</td></tr> <tr><td>ALP</td><td colspan="2">ON (With LAMP)</td></tr> </table>	SWITCHING FUNCTION			CODE	ON	OFF	OFF	ON	OFF	ALP	ON (With LAMP)		
SWITCHING FUNCTION															
CODE	ON	OFF													
OFF	ON	OFF													
ALP	ON (With LAMP)														

HIGHLY

F2

Design, specifications are subject to change without notice.

ROCKER SWITCH

Features

- Power switch conforms to safety standards for electrical equipment.
- Compact with a good space factor.
- Snap-in type for easy mounting.
- The color can be changed to correspond to the set design.
- Lamps for 125V and for 250V respectively for illuminating type.

E88392 




Applications

- Information and office equipment such as personal computers, word processors, facsimiles, monitors, etc.

Specifications

Item	Standard
Rating	12A 125VAC / 250VAC
Insulation Resistance	100M Ω min (DC 500V)
Dielectric Strength	AC 1500V (50/60Hz for 1 minute)
Contact Resistance	50m Ω max.
Electrically Life	10,000 cycle
Operating Force	500 \pm 200 gf

Product Selection

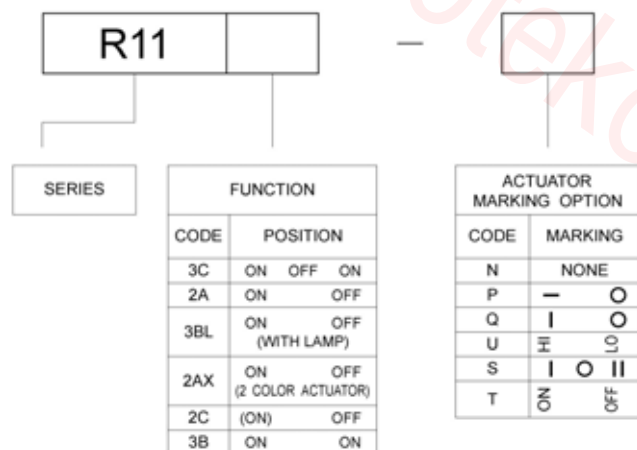

Panel Hole Size



HIGHLY

F3

ROCKER SWITCH

Dimensions

unit:mm

Item NO.	Dimensions	Function
R11-3C		<p>SWITCHING FUNCTION</p>
R11-3BL		<p>SWITCHING FUNCTION</p> <p>With lamp</p>
R11-2A		<p>SWITCHING FUNCTION</p>
R11-2AX		<p>SWITCHING FUNCTION</p>

HIGHLY

F4