


tend Ø16m/m照光式按鈕開關

型號說明

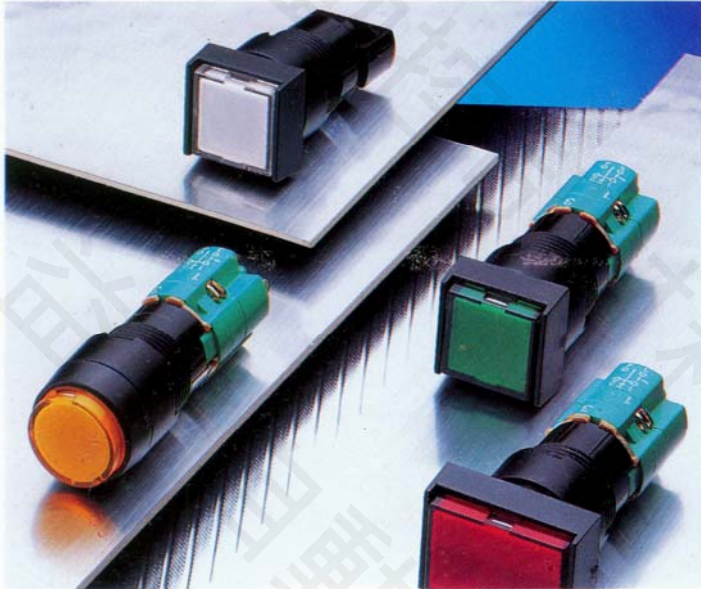

性能

接觸抵抗	15mΩ max.
絕緣抵抗	100MΩ min. (at500VDC)
耐電壓	1500VAC, 50/60HZ for 1minute
使用周圍溫度	operating: -20°C ~80°C
使用周圍濕度	95% RH max.
動作力量	150 g
壽命	機械壽命: 1,000,000 operations min. 電氣壽命: 100,000 operations min.
重量	10 gr(1a1b)
	15 gr(4a4b)

項次	代號	說明
1.固定孔徑	T16	16m/m 系列
2.型式	I	交替式照光按鈕
	B	復歸式照光按鈕
	P	指示燈
	G	護蓋
	S	防水膠套
3.外形	P	圓形
	S	正方形
	L	長方形
4.電壓	1	110VAC
	2	220VAC
	5	6V
	6	18V
	7	24V
	8	30V
	9	12V
5.顏色	R	紅
	G	綠
	O	橘
	W	白
	B	藍
6.接點	1	1a1b(1 No 1NC)
	2	2a2b(2 No 2NC)
	3	3a3b(3 No 3NC)
	4	4a4b(4 No 4NC)


規格

額定電壓	電阻負荷	電感負荷
125VAC	4A	3A
250VAC	4A	3A
24VDC	1A	0.7A
12VDC	0.2A	0.05A


接點	長度
1a1b	41.5mm
2a2b	49.5mm
3a3b	57.5mm
4a4b	65.5mm

固定孔中心距離


(R,S TYPE)

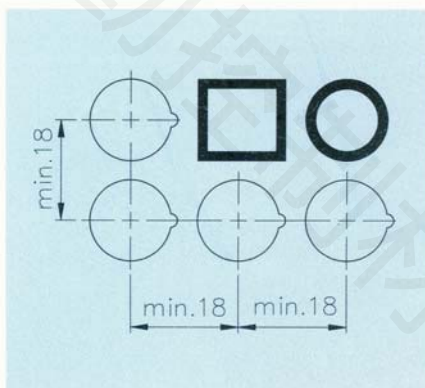


(L TYPE)

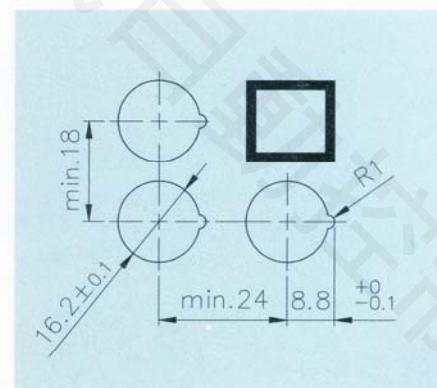


T16-IR(交替式)
T16-BR(復歸式)

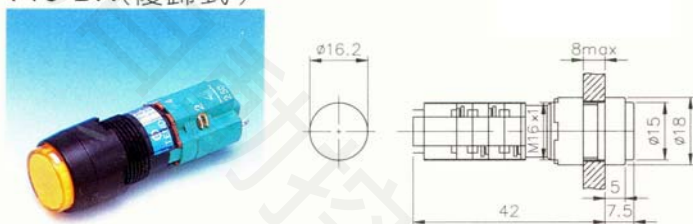

T16-PR圓型指示燈

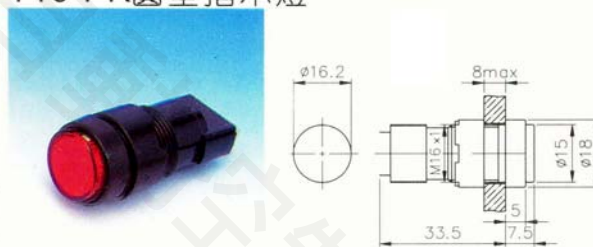


T16-IS(交替式)
T16-BS(復歸式)

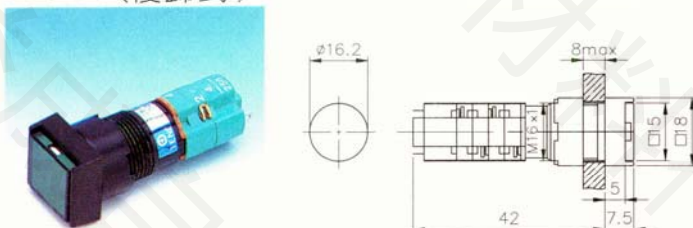

T16-PS方型指示燈




T16-IL(交替式)
T16-BL(復歸式)

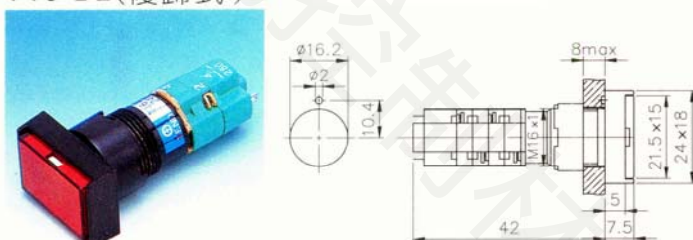


T16-PL長方型指示燈



T16-WL防水套

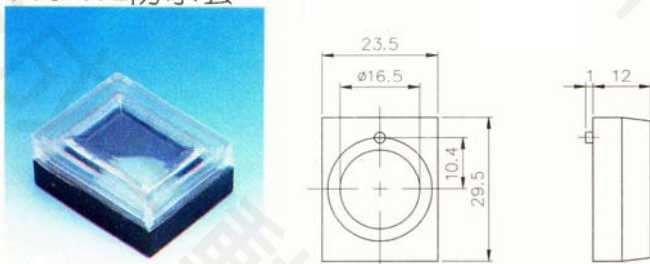

T16-GL護蓋

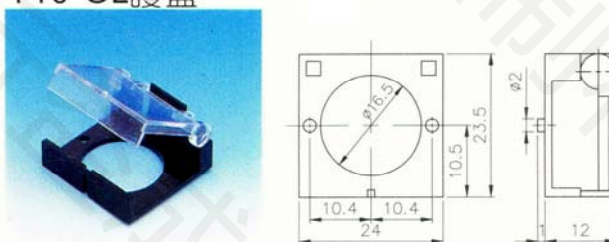

● Ø16mm/m專用燈泡
T-4.5



電壓 V	瓦特數 W	直徑 mm	長度 mm
6	0.3	4.2±0.2	16.5 ^{+0.5} ₋₁
12	0.5		
18	0.5		
24	0.5		
28	0.7		
110V	0.3		
220V	0.3		

● 固定圈鎖緊與燈泡裝卸器
T16-A

