

T2 series control elements, T2型控制元件



Standard and Certifications 標準與認證

UL Std NO.508 17th Ed - Industrial Control Equipment to the requirements of CSA standard NO. 14-05 auxiliary device, contact rated 120VAC 6A, resistive, heavy pilot duty or A600 with NC and NO contact, used for push button switches, selector switches, double push button switches, push button switches with illuminated, selector switches with illuminated, pilot lights.

Technical data 技術參數

Insulation voltage U_i 額定絕緣電壓: 600V
Thermal current 1th (A) 額定發熱電流: 10A
Short circuit current: 1000A
AC15 120V 6A, 240V 3A
AC12 480V 1.5A, 600V 1.2A
DC12 120V 2.2A, 240V 0.6A, 480V 0.4A
Ambient temperature 工作溫度: -20 to 60 °C
Contact resistance 接觸電阻: 50mΩ max
IP Enclosure 保護等級: IP65

Life 壽命

Push buttons 按鈕開關: 1 million operations
Selector and Key selector 選擇, 鑰匙開關: 600,000 operations
Contact blocks 接點組: 1million operations

Bulb type 燈泡規格

Bulb type: Ba9s LED lamp voltage 電壓: AC/DC 6V, AC/DC 12V, AC/DC 24V, AC110V, AC220V
Bulb type: SMD LED lamp voltage 電壓: AC/DC 6V, AC/DC 12V, AC/DC 24V, AC110V, AC220V
Bulb life 壽命: $\geq 30,000$ hours, ≥ 3 萬小時
Colours of bulb 燈泡顏色: R G Y BL W

S-9 LED lamp 燈泡 Rated voltage 電壓: 6V, 12V, 24V, 110V, 220V
Type: S - 9L - ☐ - ☐




R G Y BL W

S-9 SMD LED lamp 燈泡 voltage 電壓: 6V, 12V, 24V, 110V, 220V
Type: S - 9SL - ☐ - ☐




R G Y BL W


S-9 Lamp holder 燈座
Type: T2 - LH




Contact block 接點
T2 - 10 (NO, 1a)

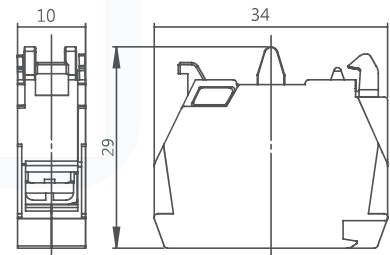

Contact block 接點
T2 - 01 (NC, 1b)

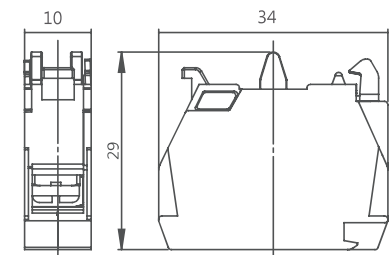

Coupler 連接座
T2 - CP



Metal ring 金屬環
T2 - MR



T2 series control elements, T2型控制元件



T2-PL

T2-MPL



Pilot lamp 指示燈

規格型號 Type	電壓 Voltage	顏色 Colour
PL-□□	110V	1 R
MPL-□□	220V	2 G
MRPL-□□	380V	3 Y
T2 L-□□	440V	4 BL
MRL-□□	6V	6 W
	12V	12
	24V	24


①

②

③

④


Dimensions 尺寸

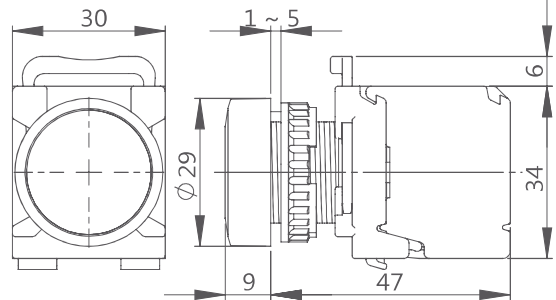

T2-MRPL

T2-L

T2-MRL

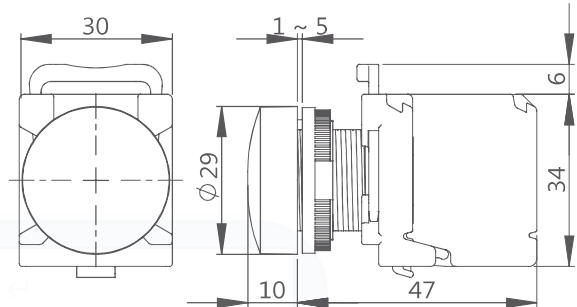

PUSH BUTTON SWITCH 按鈕開關

Ordering information (22mmΦ & 25mmΦ mounting)

T2 - 1 2 3 4

1. Actuators material 頭部材質

P	Engineering plastic 工程塑膠
M	Metal head 鑲金屬圈頭
MR	Metal head & Metal ring 鑲金屬圈頭 & 金屬鎖緊圈
R	Metal ring 金屬鎖緊圈

2. Type 頭型

F	Flat 平頭
L	Long head 凸頭
M	Mushroom 洋菇頭
ES	Emergency stop 洋菇頭急停
DB	Double - touch 雙頭按鈕
DBF	Double button flat head 雙平頭按鈕
PF	Push ON - Push OFF 交替式按鈕
PR	E-stop, Latch, Pull to Release 按拉式急停
EK	Mushroom key lock 鎖扣式洋菇頭按鈕

3. Type of contact 接點型式

圖型 Symbol					
接點代碼 Codes	10	01	11	20	02
接點 Contacts	NO 一常開	NC 一常閉	NO+NC 一常開一常閉	2NO 二常開	2NC 二常閉

4. Colour 顏色

R 紅	G 綠	Y 黃	BL 藍	W 白	BK 黑
-----	-----	-----	------	-----	------

P: Engineering plastic

M: Metal head



R: Metal ring

MR: Metal head & Metal ring



T2 series control elements, T2型控制元件

T2-PF Engineering plastic head

Push button switch 平頭按鈕

Dimensions 尺寸





規格型號 Type	接點 Contact	顏色 Colour
T2 PF -10 - ☐	1N/O	Red R
MF -01 - ☐	1N/C	Green G
MRF -11 - ☐	1NO+1NC	Yellow Y
-20 - ☐	2N/O	Blue BL
-02 - ☐	2N/C	White W
		Black B

T2-PF: Engineering plastic head

T2-MF: Metal ring

T2-MRF: Metal head & Metal ring

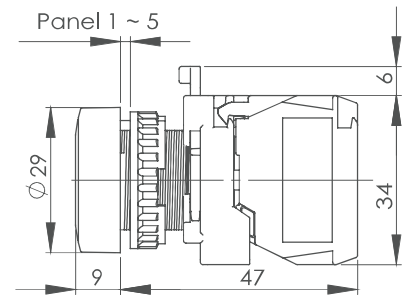

T2-PPF Engineering plastic head

Push ON - Push OFF switch 交替式按鈕





規格型號 Type	接點 Contact	顏色 Colour
T2 PPF -11 - ☐	1NO+1NC	Red R
MPF -20 - ☐	2N/O	Green G
MRPF -02 - ☐	2N/C	Yellow Y
		Blue BL
		White W

T2-PPF: Engineering plastic head

T2-MPF: Metal ring

T2-MRPF: Metal head & Metal ring

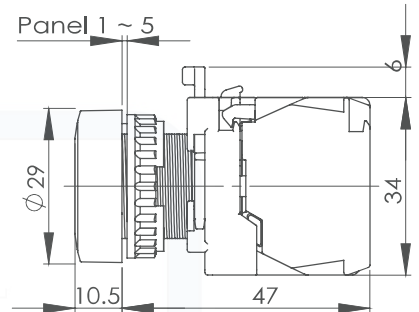

T2-PMS 35φ head, T2-PM 40φ head



Mushroom head push button 洋菇頭按鈕



規格型號 Type	接點 Contact	顏色 Colour
T2 PM -10 - ☐	1N/O	Red R
PRM -01 - ☐	1N/C	Green G
PMS -11 - ☐	1NO+1NC	Yellow Y
PRMS -20 - ☐	2N/O	Blue BL
-02 - ☐	2N/C	White W

T2-PMS: mushroom head 35mmφ

T2-PRMS: mushroom head 35mmφ

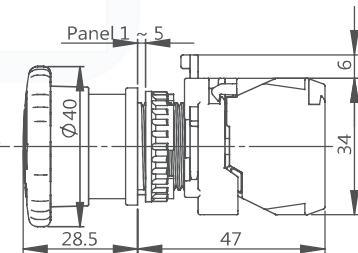

T2-PESS 35φ head, T2-PES 40φ head



Mushroom head E-stop 洋菇頭急停



規格型號 Type	接點 Contact	顏色 Colour
T2 PES -10 - ☐	1N/O	Red R
PRES -01 - ☐	1N/C	Green G
PESS -11 - ☐	1NO+1NC	Yellow Y
PRESS -20 - ☐	2N/O	Blue BL
-02 - ☐	2N/C	White W

T2-PESS: mushroom head 35mmφ

T2-PRESS: mushroom head 35mmφ

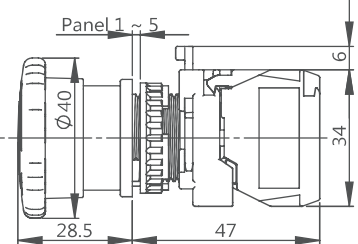



T2 series control elements, T2型控制元件

T2-DBF Plastic ring

Double touch flat head 雙平頭按鈕


Dimensions 尺寸



規格型號 Type			接點 Contact	顏色 Colour
T2	DBF	-11-	1NO+1NC	● R
	DBFR	-20-	2N/O	● G
		-02-	2N/C	

T2-DBF: Plastic ring

T2-DBFR: Metal ring

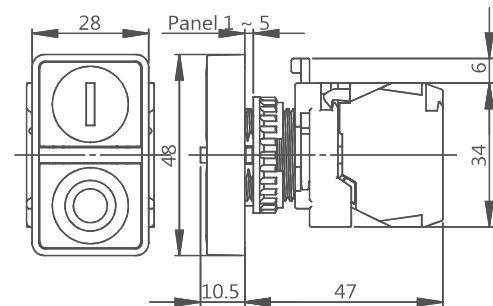

T2-DB Plastic ring


Double touch button 雙頭高低按鈕



規格型號 Type			接點 Contact	顏色 Colour
T2	DB	-11-	1NO+1NC	● R
	DBR	-20-	2N/O	● G
		-02-	2N/C	

T2-DB: Plastic ring

T2-DBR: Metal ring

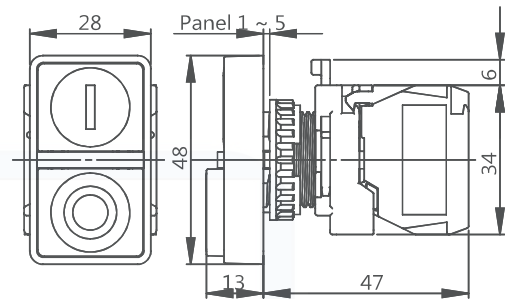

T2-EK Plastic ring


Mushroom key lock 鎖扣式按鈕



規格型號 Type			接點 Contact	顏色 Colour
T2	EK	-10-	1N/O	● R
	REK	-01-	1N/C	
		-11-	1NO+1NC	
		-20-	2N/O	
		-02-	2N/C	

T2-EK: Plastic ring

T2-REK: Metal ring

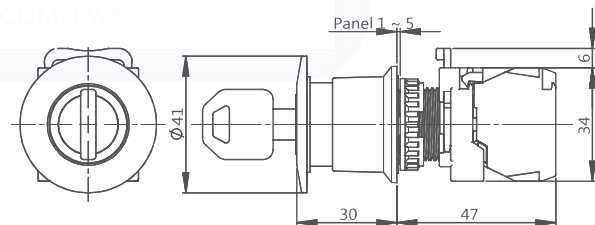

T2-PR Plastic ring


E-stop, Latch, Pull to release 按拉式急停



規格型號 Type			接點 Contact	顏色 Colour
T2	PR	-10-	1N/O	● R
	RPR	-01-	1N/C	
		-11-	1NO+1NC	
		-20-	2N/O	
		-02-	2N/C	

T2-PR: Plastic ring

T2-RPR: Metal ring

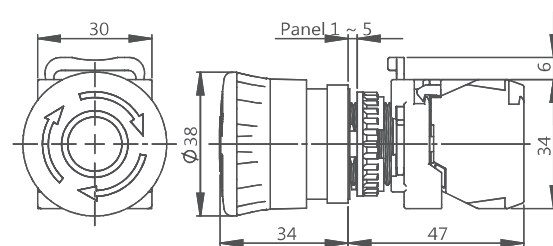

T2 series control elements, T2型控制元件



ILLUMINATED PUSH BUTTON SWITCH 照光按鈕開關

T2 - 1 2 3 4 5

1. Actuators material 頭部材質

P	Engineering plastic 工程塑膠
M	Metal head 鑲金屬圈頭
MR	Metal head & Metal ring 鑲金屬圈頭 & 金屬鎖緊圈
R	Metal ring 金屬鎖緊圈

2. Type 頭型

LF	Illuminated flat 照光平頭
GF	Illuminated guard 照光保護型
ML	Illuminated mushroom 洋菇頭照光按鈕
ESL	Illuminated emergency stop 連鎖洋菇頭急停
DBFL	Illuminated double button flat head 雙平頭照光按鈕
DBL	Illuminated double touch 雙頭照光按鈕
PFL	Illuminated Push ON - Push OFF 交替式照光按鈕

3. Type of contact 接點型式

圖型 Symbol					
接點代碼 Codes	10	01	11	20	02
接點 Contacts	NO	NC	NO+NC	2NO	2NC
	一常開	一常閉	一常開一常閉	二常開	二常閉

4. Voltage 電壓

1	110V	6	6V
2	220V	12	12V
3	380V	24	24V
4	440V		

5. Colour 顏色

R 紅	G 綠	Y 黃	BL 藍	W 白
-----	-----	-----	------	-----

T2-PLF Engineering plastic head

Illuminated push button 平頭照光按鈕


Dimensions 尺寸



規格型號 Type	接點 Contact	電壓 Voltage	顏色 Colour
PLF -10-□□	1N/O	1	● R
MLF -01-□□	1N/C	2	● G
MRLF -11-□□	1NO+1NC	3	● Y
-20-□□	2N/O	4	● BL
-02-□□	2N/C	6	○ W
		12	
		24	

T2-MLF: Metal ring

T2-MRLF: Metal head & Metal ring

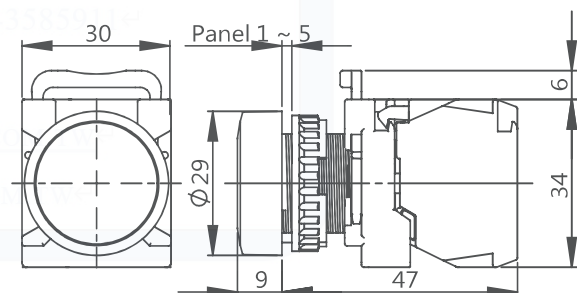

T2-PGF Engineering plastic head


Illuminated guard ring push button 保護型照光按鈕



規格型號 Type	接點 Contact	電壓 Voltage	顏色 Colour
PGF -10-□□	1N/O	1	● R
MGF -01-□□	1N/C	2	● G
MRGF -11-□□	1NO+1NC	3	● Y
-20-□□	2N/O	4	● BL
-02-□□	2N/C	6	○ W
		12	
		24	

T2-MGF: Metal ring

T2-MRGF: Metal head & Metal ring

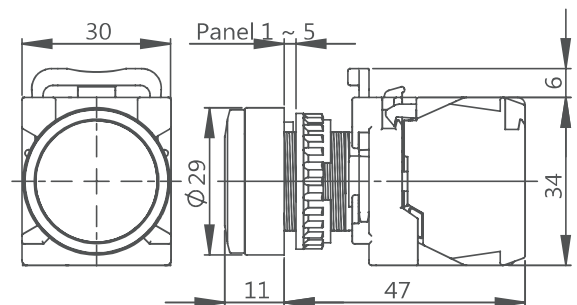




T2 series control elements, T2型控制元件

T2-ML Engineering plastic head




Illuminated mushroom head 洋菇頭照光按鈕

規格型號 Type	接點 Contact	電壓 Voltage	顏色 Colour
T2 ML -10-□□	1N/O	1	● R
MRL -01-□□	1N/C	2	● G
-11-□□	1NO+1NC	3	● Y
-20-□□	2N/O	4	● BL
-02-□□	2N/C	6	
		12	
		24	



Dimensions 尺寸




T2-MRL: Metal ring & Metal head

T2-PPFL Engineering plastic head



Illuminated Push ON - Push OFF 交替式照光按鈕

規格型號 Type	接點 Contact	電壓 Voltage	顏色 Colour
T2 PPFL -10-□□	1N/O	1	● R
MPFL -01-□□	1N/C	2	● G
MRPFL -11-□□	1NO+1NC	3	● Y
-20-□□	2N/O	4	● BL
-02-□□	2N/C	6	○ W
		12	
		24	



T2-MPFL: Metal head



T2-MRPFL: Metal ring & Metal head

T2-ESL Engineering plastic head



Illuminated emergency stop 洋菇頭照光急停

規格型號 Type	接點 Contact	電壓 Voltage	顏色 Colour
T2 ESL -10-□□	1N/O	1	● R
RESL -01-□□	1N/C	2	● G
-11-□□	1NO+1NC	3	● Y
-20-□□	2N/O	4	● BL
-02-□□	2N/C	6	
		12	
		24	



T2-RESL Metal ring

T2-ESL: mushroom head 40mmφ 大洋菇頭



T2-ESLS: mushroom head 35mmφ 小洋菇頭

T2-DBFL Flat head



Illuminated double button 雙頭照光式按鈕

規格型號 Type	接點 Contact	電壓 Voltage	顏色 Colour
T2 DBFL -11-□□	1NO+1NC	1	● R
DBL -20-□□	2N/O	2	● G
-02-□□	2N/C	3	● Y
		4	
		6	
		12	
		24	



T2-DBL: Long & Flat head



T2 series control elements, T2型控制元件

SELECTOR SWITCH & KEY SWITCH 選擇開關 & 鑰匙開關

T2 - 1 2 3 4

1. Actuators material 頭部材質

P	Engineering plastic 工程塑膠	MR	Metal head & Metal ring 鑲金屬圈頭&金屬鎖緊圈
M	Metal head 鑲金屬圈頭	R	Metal ring 金屬鎖緊圈



R: Metal ring

2. Type 頭型

S2	Knob 2 position 短柄二段	LRS3R	Spring return long knob 3 position right side 長柄三段右復歸
S3	Knob 3 position 短柄三段	LRS3L	Spring return long knob 3 position left side 長柄三段左復歸
LS2	Long knob 2 position 長柄二段	K2	Key operated 2 position, drawble 鑰匙開關二段
LS3	Long knob 3 position 長柄三段	K2N	Key operated 2 position, non-drawable 鑰匙開關二段不可抽
RS2	Spring return 2 position 短柄二段復歸	K3	Key operated 3 position, drawble 鑰匙開關三段
RS3	Spring return 3 position both side 短柄三段復歸	K3N	Key operated 3 position, non-drawable 鑰匙開關三段不可抽
RS3R	Spring return 3 position right side 短柄三段右復歸	K2R	Key operated 2 position, spring return 鑰匙開關二段復歸
RS3L	Spring return 3 position left side 短柄三段左復歸	K3R	Key operated 3 position, spring return 鑰匙開關三段復歸
LRS2	Spring return long knob 2 position 長柄二段復歸	K3RR	Key operated 3 position, spring return right side 鑰匙開關三段右復歸
LRS3	Spring return long knob 3 position both side 長柄三段復歸	K3RL	Key operated 3 position, spring return left side 鑰匙開關三段左復歸

3. Type of contact 接點型式

圖型 Symbol					
接點代碼 Codes	10	01	11	20	02
接點 Contacts	NO 一常開	NC 一常閉	NO+NC 一常開一常閉	2NO 二常開	2NC 二常閉



MR: Metal head & Metal ring

4. Colour 顏色

R 紅	G 綠	Y 黃	BL 藍	W 白	BK 黑
-----	-----	-----	------	-----	------

T2-PS2 Engineering plastic head Selector switch 2 position 選擇開關二段


Dimensions 尺寸



規格型號 Type	接點 Contact	顏色 Colour
PS2 -10- ☐	1N/O	● R
MS2 -01- ☐	1N/C	● G
T2 MRS2 -11- ☐	1NO+1NC	● Y
RS2 -20- ☐	2N/O	● BL
MRRS2 -02- ☐	2N/C	● BK

T2-MS2: Metal head

T2-MRS2: Metal head & Metal ring

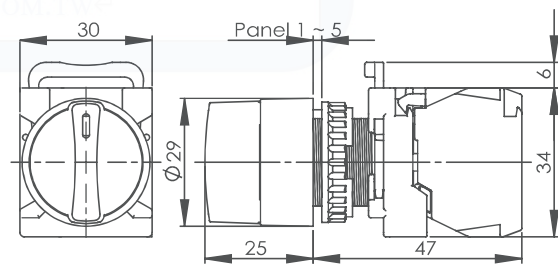


T2-PS3 Engineering plastic head Selector switch 3 position 選擇開關三段



規格型號 Type	接點 Contact	顏色 Colour
PS3 -11- ☐	1NO+1NC	● R
MS3 -20- ☐	2N/O	● G
T2 MRS3 -02- ☐	2N/C	● Y
RS3		● BL
MRRS3		● BK

T2-MS3: Metal head

T2-MRS3: Metal head & Metal ring

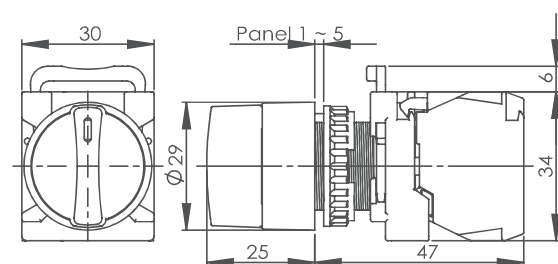



T2 series control elements, T2型控制元件

T2-LS2 Engineering plastic head Long knob selector 2 position 長柄選擇開關二段


Dimensions 尺寸



規格型號 Type	接點 Contact	顏色 Colour
LS2	-10- ☐ 1N/O	● R
MLS2	-01- ☐ 1N/C	● G
MRLS2	-11- ☐ 1NO+1NC	● Y
LRS2	-20- ☐ 2N/O	● BL
MLRS2	-02- ☐ 2N/C	● BK
MRLRS2		

T2-MLS2: Metal head

T2-MRLS2: Metal head & Metal ring

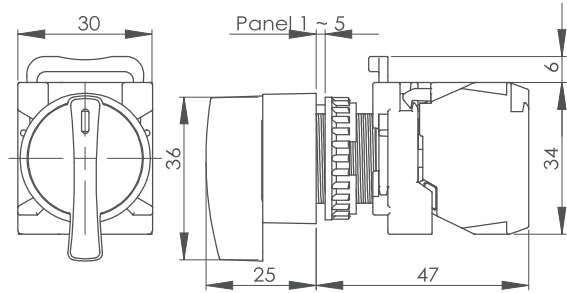


T2-LS3 Engineering plastic head Long knob selector 3 position 長柄選擇開關三段



規格型號 Type	接點 Contact	顏色 Colour
LS3	-11- ☐ 1NO+1NC	● R
MLS3	-20- ☐ 2N/O	● G
MRLS3	-02- ☐ 2N/C	● Y
LRS3		● BL
MLRS3		● BK
MRLRS3		
LRS3R		
MRS3R		
MRRS3R		
LRS3L		
MLRS3L		
MRLRS3L		

T2-MLS3: Metal head

T2-MRLS3: Metal head & Metal ring

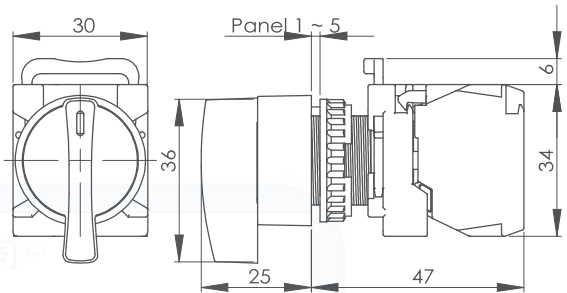


T2-K2 Key switch 2 position 鑰匙開關二段



規格型號 Type	接點 Contact
K2	-10- ☐ 1N/O
MRK2	-01- ☐ 1N/C
K2R	-11- ☐ 1NO+1NC
MRK2R	-20- ☐ 2N/O
K2N	-02- ☐ 2N/C
MRK2N	

T2-MRK2: Metal ring

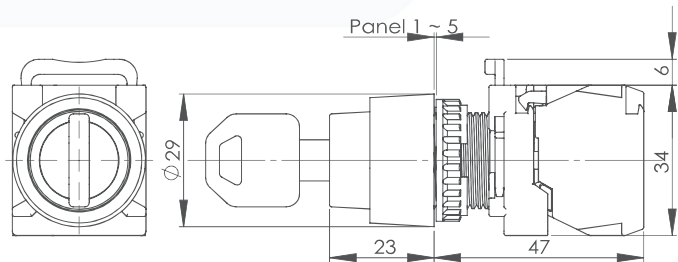


T2-K3 Key switch 3 position 鑰匙開關三段



規格型號 Type	接點 Contact
K3	-11- ☐ 1NO+1NC
MRK3	-20- ☐ 2N/O
K3R	-02- ☐ 2N/C
MRK3R	
K3N	
K3RR	
K3RL	

T2-MRK3: Metal ring

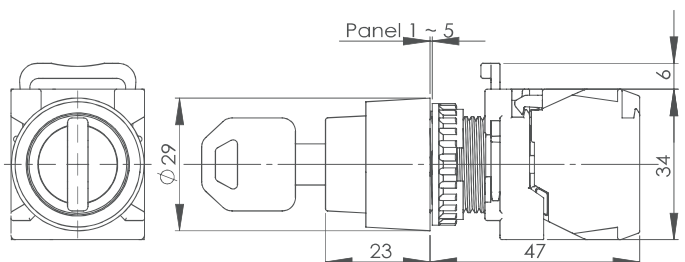

T2 series control elements, T2型控制元件



ILLUMINATED SELECTOR SWITCH 照光選擇開關

T2 - 1 2 3 4 5

1. Actuators material 頭部材質

P	Engineering plastic 工程塑膠
M	Metal head 鑲金屬圈頭
MR	Metal head & Metal ring 鑲金屬圈頭 & 金屬鎖緊圈
R	Metal ring 金屬鎖緊圈



P: Engineering plastic head



M: Metal head

2. Type 頭型

SL2	Illuminated 2 position 照光二段	RSL3R	Illuminated spring return 3 position right side 照光三段右復歸
SL3	Illuminated 3 position 照光三段	RSL3L	Illuminated spring return 3 position left side 照光三段左復歸
LSL2	Illuminated long knob 2 position 照光長柄二段	LRSL2	Illuminated spring return long knob 2 position 照光長柄二段復歸
LSL3	Illuminated long knob 3 position 照光長柄三段	LRSL3	Illuminated spring return long knob 3 position both side 照光長柄三段復歸
RSL2	Illuminated spring return 2 position 照光二段復歸	LRSL3R	Illuminated spring return long knob 3 position right side 照光長柄三段右復歸
RSL3	Illuminated spring return 3 position both side 照光三段復歸	LRSL3L	Illuminated spring return long knob 3 position left side 照光長柄三段左復歸

3. Type of contact 接點型式

圖型 Symbol					
接點代碼 Codes	10	01	11	20	02
接點 Contacts	NO 一常開	NC 一常閉	NO+NC 一常開一常閉	2NO 二常開	2NC 二常閉

4. Voltage 電壓

1	110V	6	6V
2	220V	12	12V
3	380V	24	24V
4	440V		

5. Colour 顏色

R 紅	G 綠	Y 黃	BL 藍	W 白
-----	-----	-----	------	-----

T2-PSL2 Engineering plastic head




Illuminated selector switch 照光選擇二段

規格型號 Type	接點 Contact	電壓 Voltage	顏色 Colour
PSL2 -10-□□	1N/O	1	● R
MSL2 -01-□□	1N/C	2	● G
MRSL2 -11-□□	1NO+1NC	3	● Y
T2 RSL2 -20-□□	2N/O	4	● BL
MRRSL2 -02-□□	2N/C	6	○ W
		12	
		24	

T2-MSL2: Metal head

T2-MRSL2: Metal head & Metal ring

Dimensions 尺寸

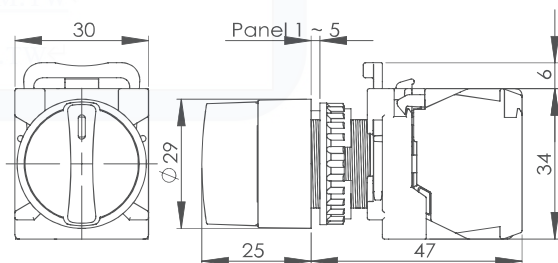

T2-PSL3 Engineering plastic head




Illuminated selector switch 照光選擇三段

規格型號 Type	接點 Contact	電壓 Voltage	顏色 Colour
PSL3 -11-□□	1NO+1NC	1	● R
MSL3 -20-□□	2N/O	2	● G
MRSL3 -02-□□	2N/C	3	● Y
T2 RSL3		4	● BL
MRRSL3		6	○ W
		12	
		24	

T2-MSL3: Metal head

T2-MRSL3: Metal head & Metal ring

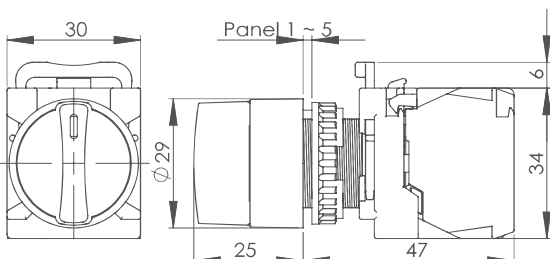



T2 series control elements, T2型控制元件

T2-PLSL2 Engineering plastic head

Long knob Illuminated selector 長柄照光選擇二段


Dimensions 尺寸



規格型號 Type	接點 Contact	電壓 Voltage	顏色 Colour
PLSL2 -10-□	1N/O	1	● R
MLSL2 -01-□	1N/C	2	● G
MRLSL2 -11-□	1NO+1NC	3	● Y
T2 LRSL2 -20-□	2N/O	4	● BL
LMRSL2 -02-□	2N/C	6	○ W
		12	
		24	

T2-MLSL2: Metal head

T2-MRLSL2: Metal head & Metal ring

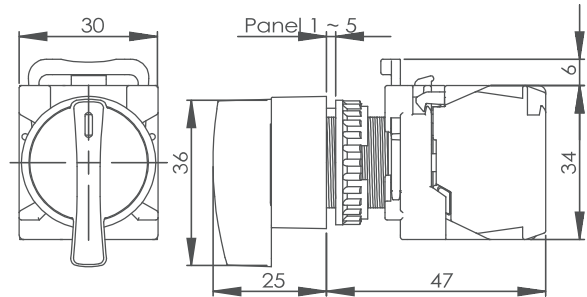

T2-PLSL3 Engineering plastic head


Long knob Illuminated selector 長柄照光選擇三段



規格型號 Type	接點 Contact	電壓 Voltage	顏色 Colour
PLSL3 -11-□	1NO+1NC	1	● R
MLSL3 -20-□	2N/O	2	● G
MRLSL3 -02-□	2N/C	3	● Y
LRSL3		4	● BL
T2 LRSL3R		6	○ W
MLRSL3R		12	
LRSL3L		24	
MLRSL3L			
MLRSL3			

T2-MLSL3: Metal head

T2-MRLSL3: Metal head & Metal ring

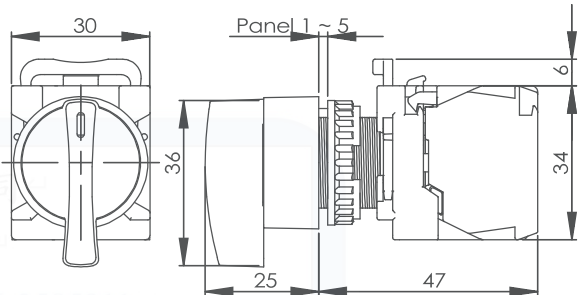

Control box 1 to 6 holes 控制盒 一孔~六孔

B-1A	1 hole control box IP65 22mmφ W75 X D56.5, φ22, 75	B-2A	2 hole control box IP65 22mmφ φ22, 120, W75 X D56.5
B-3A	3 hole control box IP65 22mmφ φ22, 156, W75 X D56.5	EG-13.5	cable grand for control box IP68 8.9, 24.6, 18.9, 12.5, 20.4, 15.5, Lock Nut EGL, Body EGB, Seal EGS, Nut EGN
B-4A	4 hole control box IP65 22mmφ 178, W75 X D56.5	B-5A	5 hole control box IP65 22mmφ 213, W75 X D56.5

T2 series control elements, T2型控制元件



AUSPICIOUS





T2 series control elements, T2型控制元件

Control station No. of holes	Part No.		Control units combination						
			1	2	3	4	5	6	
1 hole B1-Y Yellow B1-G Gray	B1- ☐	01	T2-PR						
		02	T2-PES						
		03	T2-PMS-RC						
		04	T2-PES-G1						
		05	T2-PES-G2BM4						
		06	T2-PF11						
		07	T2-KS11						
		08	T2-CS11						
		09	T2-DBF						
		10							
2 holes B2-Y Yellow B2-G Gray	B2- ☐	01	T2-PF11R	T2-PF11G					
		02	T2-PES01R	T2-PF11G					
		03	T2-PGF11R	T2-PGF11G					
		04	T2-K210	T2-PF11G					
3 holes B3-Y Yellow B3-G Gray	B3- ☐	01	T2-PF11R	T2-PF11G	T2-PF11Y				
		02	T2-PES01R	T2-PF11R	T2-PF11BL				
		03	L22 R	T2-PF11R	T2-PF11G				
		04	T2-PGF01R	T2-PGF10G	T2-PGF10W				
4 holes B4-Y Yellow B4-G Gray	B4- ☐	01	L22 R	T2-PF01R	T2-PF10G	T2-PF10Y			
		02	T2-PES01R	T2-PF01R	T2-PF10G	T2-PF10Y			
		03	T2-PES01R	T2-PGF01R	T2-PGF10G	T2-PGF10Y			
5 holes B5-Y Yellow B5-G Gray	B5- ☐	01	L22 R	T2-PES01R	T2-PF01R	T2-PF10G	T2-PF10Y		
		02	T2-PES01R	T2-PF01R	T2-PF10G	T2-PF10Y	T2-PF10BK		
6 holes B6-Y Yellow B6-G Gray	B6- ☐	01	T2-PES01R	T2-PGF11Y	T2-PF10G	T2-PF01R	T2-PF10Y	T2-PF10BK	
		02	T2-PES01R	T2-PS2-11	T2-PF10G	T2-PF10Y	T2-PF01R	T2-PF10BL	
		03	T2-PES01R	T2-PF01R	T2-PF10G	T2-PF10Y	T2-PF10BL	T2-PF10BK	

T2 series control elements, T2型控制元件




G2-BM4

Legend plate



I.D. 22 ϕ O.D. 52 ϕ



Water proof boot silicon rubber

T2-DWB

T2-WB




PF-B22


Legend plate Frame



Legend plate frame



Legend plate



PC-B22


Button protect cover




Legend plates LP-01, 02, LP-307

UP 01	START 02	STOP 03	OPEN 04	CLOSE 05	ON 06	OFF 07	FWD 08	REV 09	HIGH 10	LOW 11
OFF ON 21	0 1 22	I II 23	STOP START 24	HIGH LOW 25	MAN AUTO 26	UP DOWN 27	POWER 12	DOWN 13	RUN 14	電源 15
OFF ON 301	OFF MAN AUTO 302	OFF HIGH LOW 303	OFF FOR REV 304	0 1 2 305	OFF UP DOWN 306	I 0 II 307	運轉 16	啟動 17	停止 18	停止 手動 自動 19


EMO switch guards G1-B22



EMO switch guards G2-B22




Pad lock cover RC-B22



Legend plate for Control box Size: 17x17mm

ON CP01	OFF CP02	START CP03	STOP CP04	
FOR CP05	REV CP06	UP CP07	DOWN CP08	
ON OFF CP09	START STOP CP10	POWER CP11	↑ CP12	

Locking ring wernch LW-B22





Foot and Palm switches, Signal lamp, Buzzer

AFP - CT11R




AFP - CT

1. contact block

10	1N/O (1a)	30	3N/O (3a)
01	1N/C (1b)	03	3N/C (3b)
11	1N/O+1N/C (1a1b)	21	2N/O 1N/C
20	2N/O (2a)	12	1N/O 2N/C
02	2N/C (2b)		

2. color

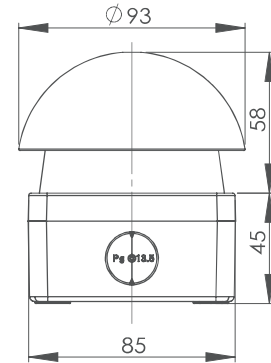

BUZZER - 22mm mounting




BF22 -

1. voltage

1	AC100-120V
2	AC220-240V
12	AC, DC 12V
24	AC, DC 24V

2. color

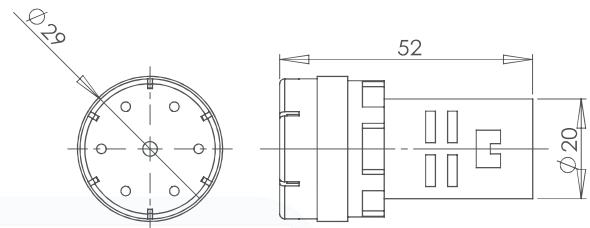

Signal lamp




L22 -

1. voltage

1	AC/DC 110V
2	AC/DC 220V
3	AC/DC 380V
12	AC/DC 12V
24	AC/DC 24V

2. color

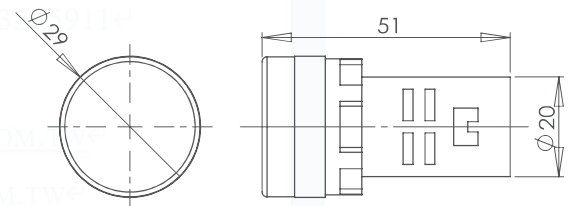

Signal lamp dual color




DL22 -

1. voltage

1	AC/DC 110V
2	AC/DC 220V
3	AC/DC 380V
24	AC/DC 24V
48	AC/DC 48V

2. color

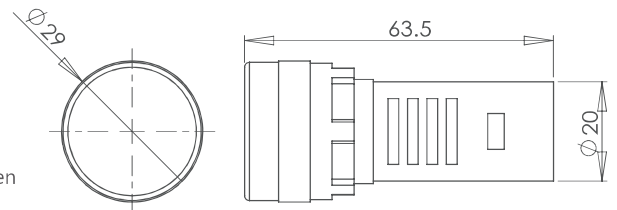

T2-G111



Contact block

G110	1N/O (1a)
G101	1N/C (1b)
G111	1N/O+1N/C (1a1b)
G120	2N/O (2a)
G102	2N/C (2b)

T2-RC11



Contact block

RC10	1N/O (1a)
RC01	1N/C (1b)
RC11	1N/O+1N/C (1a1b)
RC20	2N/O (2a)
RC02	2N/C (2b)

T2 series flush mountable push button switches 埋入式按鈕開關




Ordering information


T2 - ☐ ☐ ☐ ☐ ☐

Type 型式	Ring color 護圈	Mounting hole 孔徑	Type of contact 接點		Color 顏色
BF: Flat head 平頭 BL: Long head 凸頭 BE: Mushroom head 洋菇頭	S: Silver 電鍍 B: Black 黑色	3: 30mmΦ	10 01 11 20 02	1NO 1NC 1NO+1NC 2NO 2NC	● Red 紅 ● Green 綠 ● Yellow 黃 ● Black 黑 ● Blue 藍 ○ White 白


T2 - BF

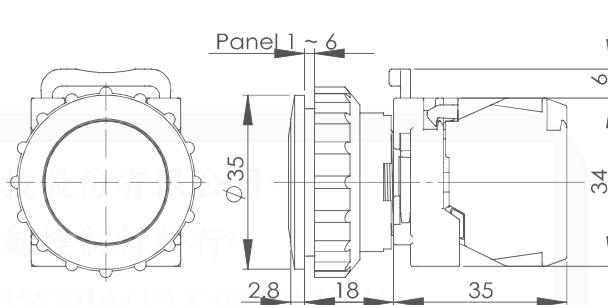

T2 - BL

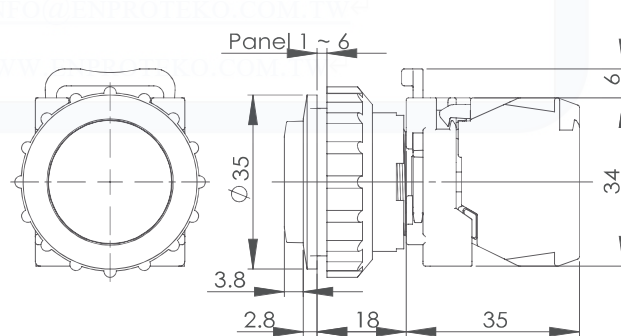

T2 - BE

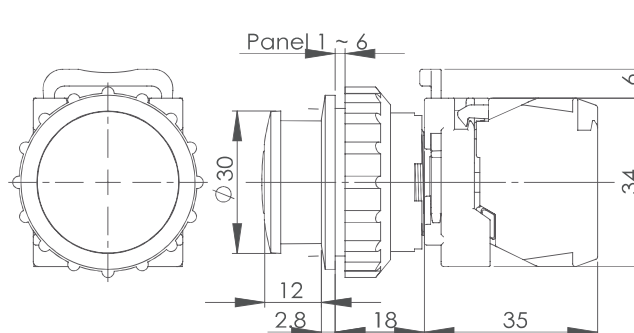

T2 series flush mountable illuminated push button switches 埋入式照光按鈕開關




AUSPICIOUS

Ordering information




Type 型式	Ring color 護圈	Mounting hole 孔徑	Type of contact 接點		Voltage 電壓		Color 顏色
LBF: Flat head 平頭	S: Silver 電鍍	3: 30mmΦ	10	1NO	1	110V	Red 紅
LBL: Extended head 凸頭	B: Black 黑色		01	1NC	2	220V	Green 綠
LBE: Mushroom head 洋菇頭			11	1NO+1NC	3	380V	Yellow 黃
			20	2NO	4	440V	Black 黑
			02	2NC	6	6V	Blue 藍
					12	12V	White 白
		24	24V				


T2 - LBF

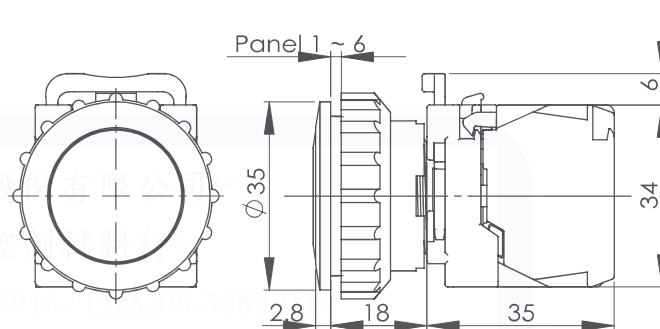

T2 - LBL

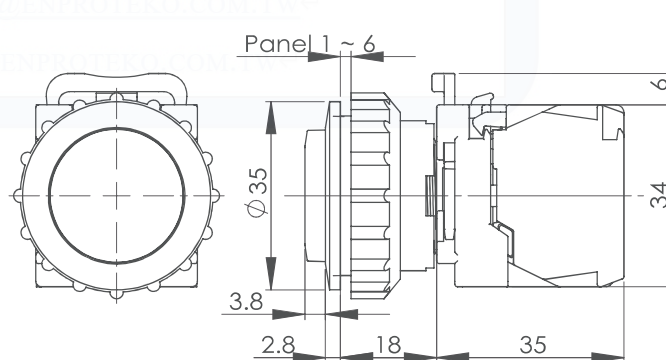

T2 - LBE

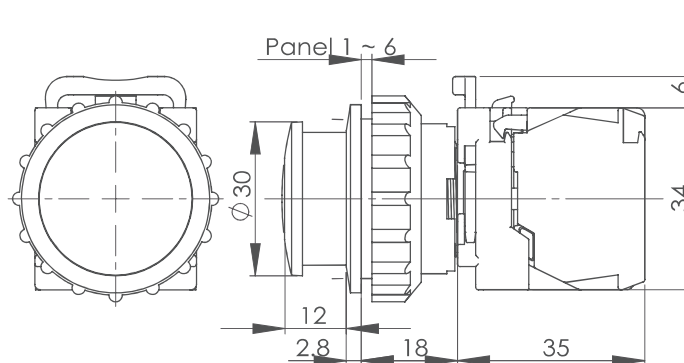

T2 series flush mountable selector switches 埋入式選擇開關




Ordering information

T2 - ☐ ☐ ☐ ☐ ☐

Type 型式	Mounting hole 孔徑	Ring color 護圈	Type of contact 接點	Color 顏色
S2: knob 2 position 短柄二段 S3: knob 3 position 短柄三段 LS2: long knob 2 position 長柄二段 LS3: long knob 3 position 短柄三段 RS2: spring return 2 position 短柄二段復歸 RS3: spring return 3 position 短柄三段復歸 RS3R: spring return 3 position right side 短柄三段右復歸 RS3L: spring return 3 position left side 短柄三段左復歸 LRS2: spring return long knob 2 position 長柄二段復歸 LRS3: spring return long knob 3 position 長柄三段復歸 LRS3R: spring return long knob 3p. right side 長柄三段右復歸 LRS3L: spring return long knob 3p. left side 長柄三段左復歸	3: 30mmΦ	S: Silver 電鍍 B: Black 黑色	10 1NO 一常開 01 1NC 一常閉 11 1NO+1NC 一常開一常閉 20 2NO 二常開 02 2NC 二常閉	● Red 紅 ● Green 綠 ● Yellow 黃 ● Black 黑


T2 - S2, RS2

T2 - S3, RS3, RS3R, RS3L

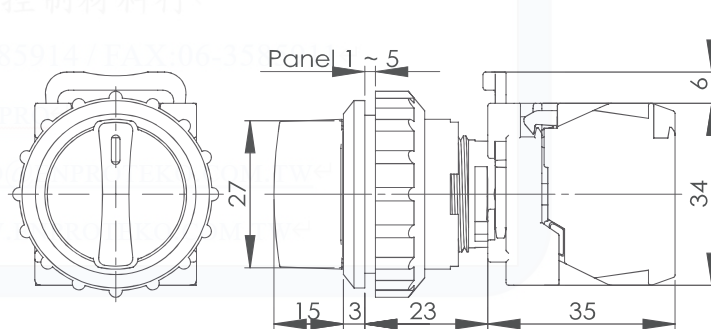

T2 - LS2, LRS2

T2 - LS3, LRS3, LRS3R, LRS3L

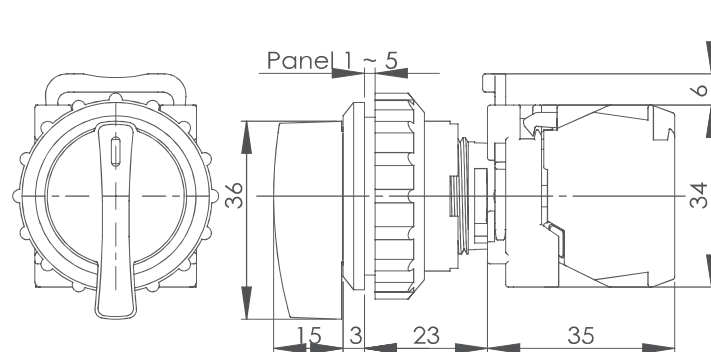

T2 series flush mountable illuminated selector switches 埋入式照光選擇開關




Ordering information

T2 - ☐ ☐ ☐ ☐ ☐ ☐

Type 型式	Mounting hole 孔徑	Ring color 護圈 電鍍 B: Black 黑色	Type of contact 接點	Voltage 電壓	Color 顏色
SL2: Illuminated 2 position 照光短柄二段 SL3: Illuminated 3 position 照光短柄三段 LSL2: Illuminated long knob 2 position 照光長柄二段 LSL3: Illuminated long knob 3 position 照光長柄三段 RSL2: Illuminated spring return 2 position 照光短柄二段復歸 RSL3: Illuminated spring return 3 position 照光短柄三段復歸 RSL3R: Illuminated spring return 3p. right side 照光短柄三段右復歸 RSL3L: Illuminated spring return 3p. left side 照光短柄三段左復歸 LRSL2: Illuminated spring return long knob 2p. 照光長柄二段復歸 LRSL3: Illuminated spring return long knob 3p. both sides LRSL3R: Illuminated spring return long knob 3p. right side LRSL3L: Illuminated spring return long knob 3p. left side	3: 30mmΦ	S: Silver 電鍍 B: Black 黑色	10 1NO 一常開 01 1NC 一常閉 11 1NO+1NC 一常開一常閉 20 2NO 二常開 02 2NC 二常閉	1 110V 2 220V 3 380V 4 440V 6 6V 12 12V 24 24V	● Red 紅 ● Green 綠 ● Yellow 黃 ● Blue 藍 ○ White 白

T2 - SL2, RSL2
T2 - SL3, RSL3, RSL3R, RSL3L

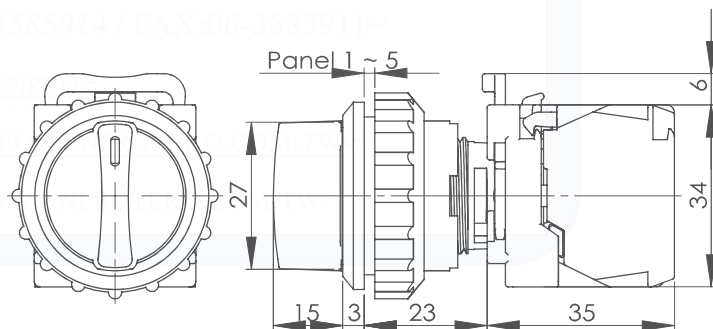

T2 - LSL2, LRSL2
T2 - LSL3, LRSL3, LRSL3R, LRSL3L

